

# Lighting of London

## Product Datasheet

## Spot.35



+(44)0207 139 5129





enquiries@lightingoflondon.co

The Spot.35 magnetic LED module is magnetically connected to the Magtrak profile providing superior appearance and installation. It provides a beautiful beam to project on to, and enhance, any surface.

The Spot.35 comes in three beam angles: 20°, 30° and the wider 40°, offering 360° directional focus.

The fitting is finished in a stylish black powder coating.

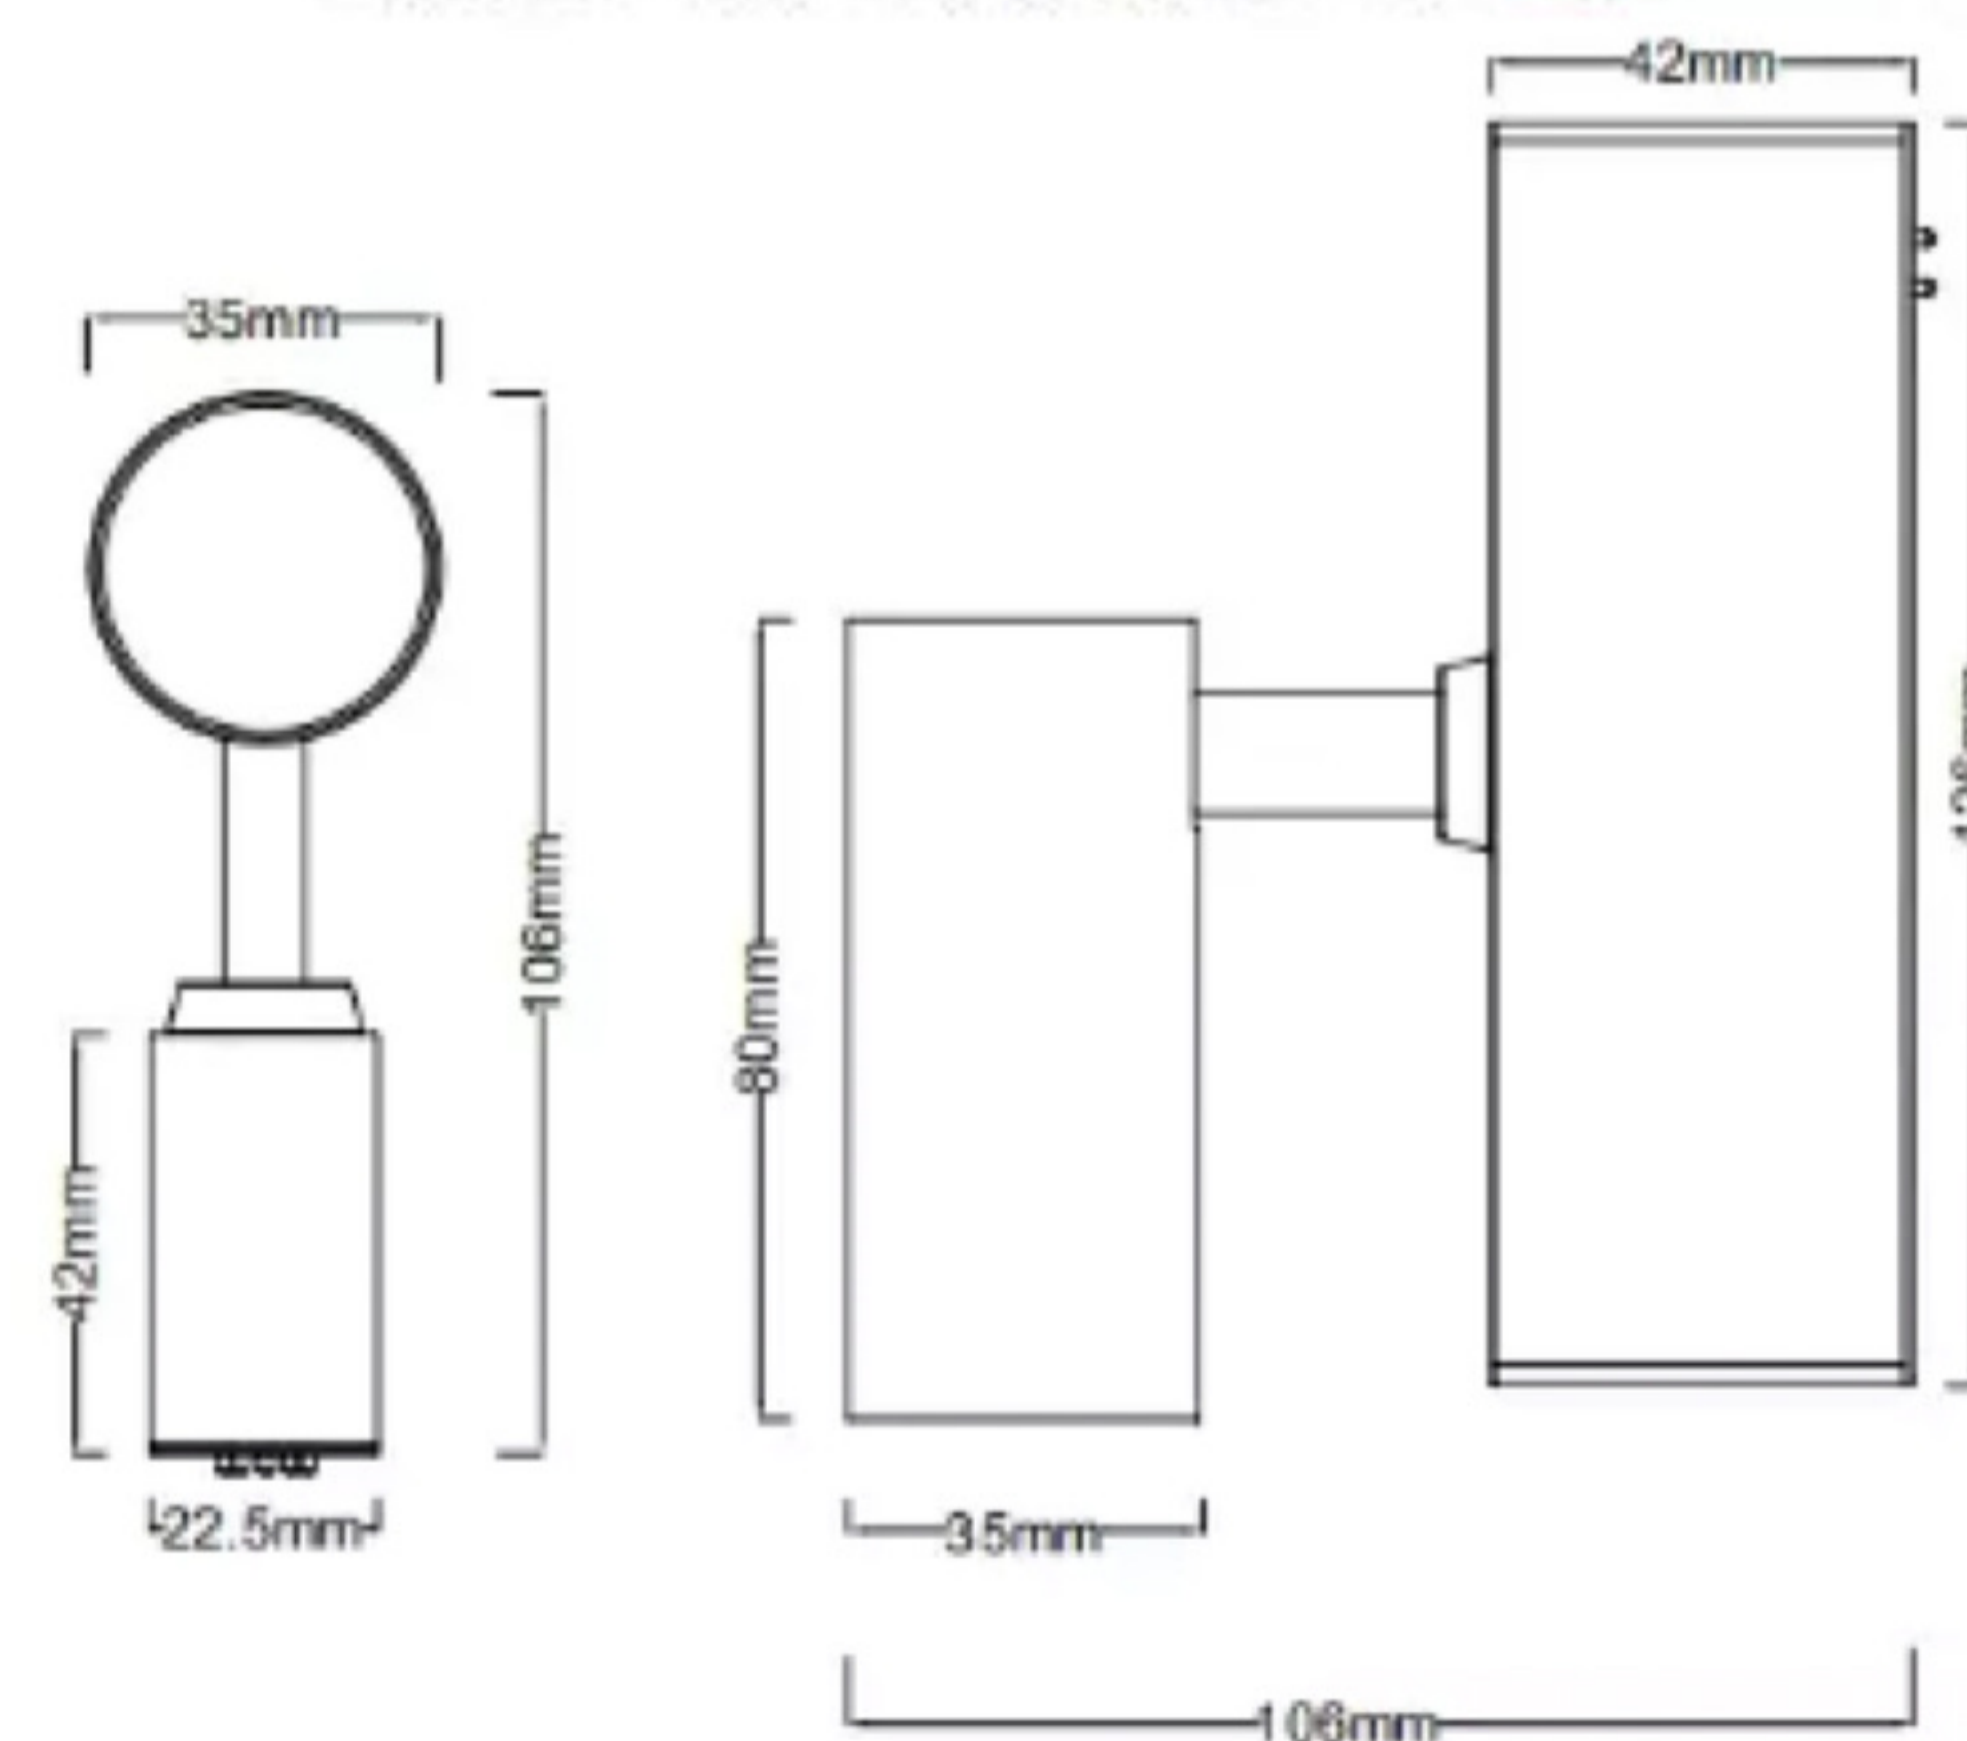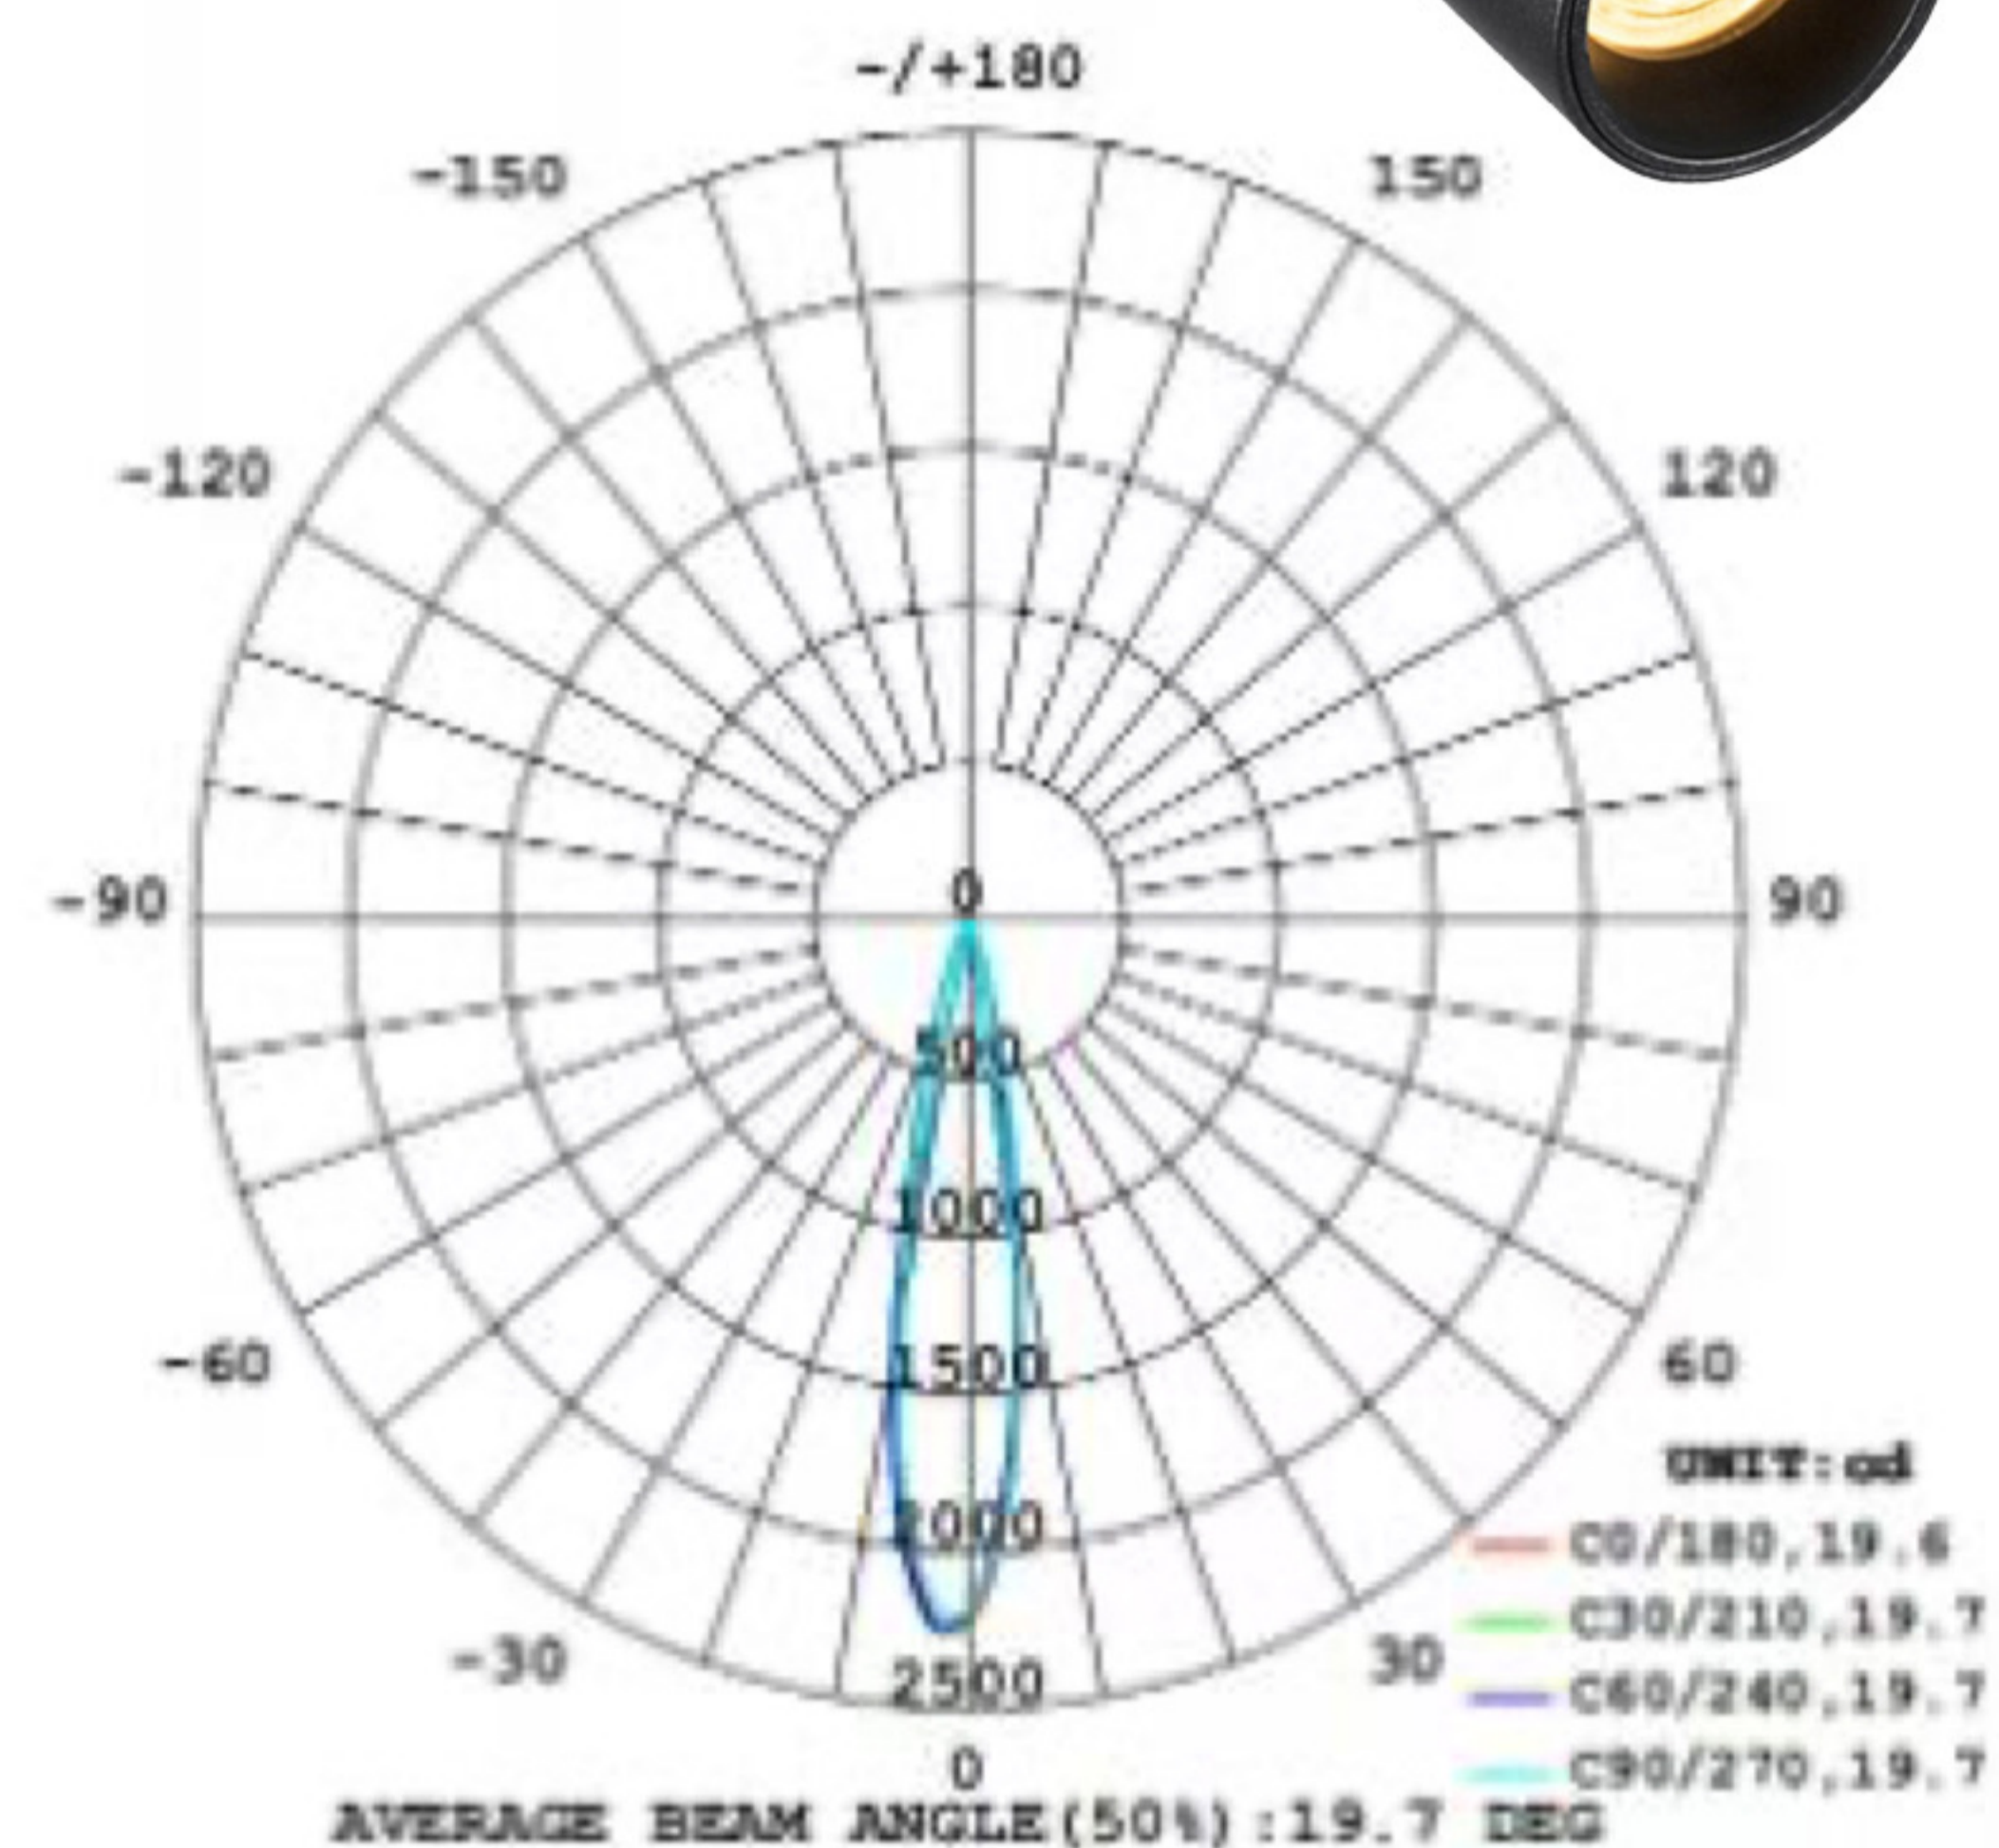

20° beam angle

|    | E(lx) | D(m) |
|----|-------|------|
| 1m | 385   | 0.66 |
| 2m | 171   | 1.00 |
| 3m | 125   | 1.16 |
| 4m | 96    | 1.33 |
| 5m | 76    | 1.50 |

|                            |                        |
|----------------------------|------------------------|
| <b>Material</b>            | Aluminium              |
| <b>Lumen Output</b>        | 440Lm                  |
| <b>LED</b>                 | CREE 5W 24V DC         |
| <b>Lifespan</b>            | > 50,000 hrs           |
| <b>CRI</b>                 | > 90                   |
| <b>Input Voltage</b>       | 24V DC                 |
| <b>Power</b>               | 5W                     |
| <b>Power Factor</b>        | >0.50                  |
| <b>Size</b>                | Ø 35 x 80mm            |
| <b>Beam Angle</b>          | 20°, 30°, 40°          |
| <b>Cut Out</b>             | -                      |
| <b>Dimmable</b>            | TRIAC or DALI Dimmable |
| <b>IP Rating</b>           | 20                     |
| <b>Working Temperature</b> | -20° - +40°C           |
| <b>Binning</b>             | 1 SDCM                 |
| <b>Colour Temperature</b>  | 2700K                  |
| <b>Finish</b>              | Black Powder Coat      |

