



## Beam.S.Q

SKU: Beam.S.Q

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

w: [www.lightingoflondon.co](http://www.lightingoflondon.co)



The Beam.S.Q is a versatile and discreet lighting solution that is perfect for grazing and up-lighting requirements. It offers a generous output and compact size, making it ideal for use in residential environments, both indoors and outdoors.


The package comes with an installation sleeve, and the resin-filled cable entry and gland provide excellent protection against water ingress.

To ensure smooth dimming, we recommend using our range of PowerBank drivers.


Product Categories: *Uplights / Exterior*

<b>Material</b>	<i>Anodised Aluminium &amp; Stainless Steel 316</i>	<b>Beam Angle</b>	<i>15° / 30° / 45°</i>
<b>Lumen Output</b>	<i>80Lm</i>	<b>Cut Out</b>	<i>Ø 23mm</i>
<b>LED</b>	<i>OSRAM 1 pc 3030 LED</i>	<b>Fire &amp; Acoustic Rated</b>	-
<b>Lifespan</b>	<i>&gt;50,000 hours</i>	<b>IP Rating</b>	<i>67</i>
<b>CRI</b>	<i>&gt;90</i>	<b>Working Temperature</b>	-
<b>Input Voltage</b>	<i>DC</i>	<b>Binning</b>	-
<b>Power</b>	<i>1.05W 3V 350mA</i>	<b>Colour Temperature</b>	<i>3000K</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Standard Finish</b>	<i>Stainless Steel</i>

### Light Distribution Curve

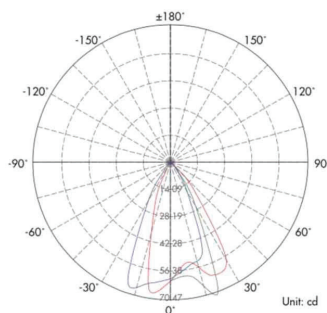

### Dimensions

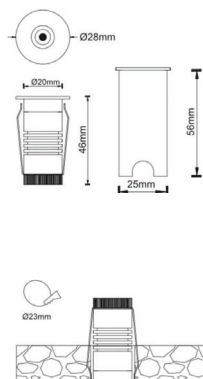

### Lux Distribution Curve

Illuminance at a Distance

Distance (m)	Center Beam LUX	Beam Width (m)	
		V	H
2m	182.33 LUX	1.2m	1.2m
4m	45.58 LUX	2.3m	2.4m
6m	20.26 LUX	3.5m	3.6m
8m	11.40 LUX	4.7m	4.8m
10m	7.29 LUX	5.8m	6.0m
12m	5.06 LUX	7.0m	7.2m

Vert.Spread:32.5 Horiz.Spread:33.2