



Follow.Me.P

SKU: Follow.Me.P

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Follow.Me.P recessed plaster-in spotlight is highly versatile, offering almost complete directional control to the user. It comes with an adjustable cylindrical fitting that can point in a 355° horizontal range. If a 90° vertical spotlight is needed, it can be recessed back into its fitting to sit flush with the ceiling. The Follow.Me.P is designed to blend seamlessly into its surroundings. This spotlight comes with three beam angle options- a sharp 15°, a generous 24° or a wider 36°, giving you ample options to highlight any wall or object with a warm 2700k glow.

Product Categories: [Spotlights](#) / [Downlights](#)

Material	Anodised Aluminium	Beam Angle	15° / 24° / 36°
Lumen Output	403Lm	Cut Out	Ø 50mm
LED	TOYONIA DC500mA (Driver Supplied)	Fire & Acoustic Rated	60min
Lifespan	>50,000 hours	IP Rating	54
CRI	>90	Working Temperature	-20° - +40°C
Input Voltage	240V DC	Binning	1 SDCM
Power	8W	Colour Temperature	2700K
Power Factor	>0.98	Standard Finish	Matt White / Matt Black

Dimensions

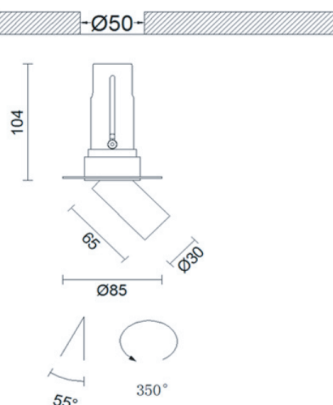

Lux Distribution Curve

15°						24°						36°					
3.28ft	E _{max}		E(lx)		1.02ft	3.28ft	E _{max}		E(lx)		1.41ft	3.28ft	E _{max}		E(lx)		1.61ft
1.0m	2,494 lx		1,742 lx		0.31m	1.0m	2,450 lx		1,721 lx		0.43m	1.0m	826 lx		578 lx		0.49m
6.56ft					2.07ft	6.56ft					2.85ft	6.56ft					3.25ft
2.0m	623 lx		436 lx		0.63m	2.0m	612 lx		430 lx		0.87m	2.0m	206 lx		144 lx		0.99m
9.84ft					3.12ft	9.84ft					4.10ft	9.84ft					4.89ft
3.0m	276 lx		193 lx		0.95m	3.0m	271 lx		191 lx		1.25m	3.0m	91 lx		64 lx		1.49m
13.12ft					4.17ft	13.12ft					5.71ft	13.12ft					6.53ft
4.0m	155 lx		108 lx		1.27m	4.0m	152 lx		107 lx		1.74m	4.0m	52 lx		36 lx		1.99m
Height	Max E	Beam angle 15°	Ave E	Diameter		Height	Max E	Beam angle 24°	Ave E	Diameter		Height	Max E	Beam angle 36°	Ave E	Diameter	