



## Line.20

SKU: Line.20.TRIAC / Line.20.DALI

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)


The Line.20 magnetic LED module epitomises a sophisticated lighting solution, seamlessly integrated via magnetic connection with the Magtrak profile, thereby ensuring an impeccable aesthetic and effortless installation process. This module exudes a radiant, diffused light, enhancing the ambiance of any space while offering exceptional ambient illumination.

Embedded within the Magtrak profile, the Line.20 creates the illusion of an inconspicuous light source, adding an element of subtlety to its luminous output. Its opal lighting quality makes it ideal for a wide range of indoor applications, including general illumination and outlining purposes.


**Product Category:** *Track Lighting*

<b>Material</b>	<i>Anodised Aluminium</i>	<b>Beam Angle</b>	<i>110°</i>
<b>Lumen Output</b>	<i>460Lm</i>	<b>Size</b>	<i>Ø 196 * 22.5 * 42mm</i>
<b>LED</b>	<i>OSRAM</i>	<b>Dimmable</b>	<i>TRIAC / DALI</i>
<b>Lifespan</b>	<i>&gt;50,000 hours</i>	<b>IP Rating</b>	<i>20</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Working Temperature</b>	<i>-20°C - +40°C</i>
<b>Input Voltage</b>	<i>DC</i>	<b>Binning</b>	<i>1 SDCM</i>
<b>Power</b>	<i>8W 24V</i>	<b>Colour Temperature</b>	<i>2700K</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Standard Finish</b>	<i>Black Powder Coat</i>

### Light Distribution Curve

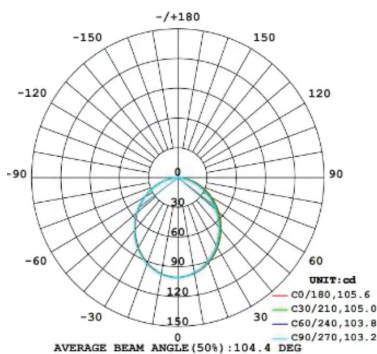

### Dimensions

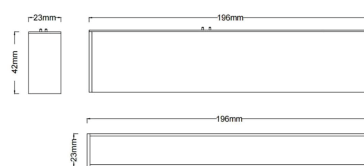

### Lux Distribution Curve

	E(lx)	D(m)
1m	34	2.50
2m	8	5.00
3m	3	7.50
4m	2	10.00
5m	1	12.00