



## Spot.35.T

SKU: Spot.35.T.TRIAC / Spot.35.T.DALI



**t:** +(44) 020 7139 5129    **e:** enquiries@lightingoflondon.co    **w:** www.lightingoflondon.co


The Spot.35.T magnetic LED module is a versatile twin lighting solution that boasts an impressive array of features. The module is designed to connect magnetically to the Magtrak profile, creating a sleek and streamlined appearance. Its powerful double LED beam provides an exquisite illumination that enhances the appearance of any surface it is directed towards.

The Spot.35.T module is available in three different beam angles, allowing you to customize the lighting to your specific needs. We offer a 20°, 30°, and 40° beam angle, allowing 360° directional focus. The fitting is finished with a stylish black powder coating that gives it an elegant and sophisticated look.


**Product Category:** Track Lighting

<b>Material</b>	<i>Anodised Aluminium</i>	<b>Beam Angle</b>	<i>20° / 30° / 40°</i>
<b>Lumen Output</b>	<i>2 x 440Lm</i>	<b>Size</b>	<i>Ø 35 * 80mm</i>
<b>LED</b>	<i>CREE</i>	<b>Dimmable</b>	<i>TRIAC / DALI</i>
<b>Lifespan</b>	<i>&gt;50,000 hours</i>	<b>IP Rating</b>	<i>20</i>
<b>CRI</b>	<i>&gt;90</i>	<b>Working Temperature</b>	<i>-20°C - +40°C</i>
<b>Input Voltage</b>	<i>DC</i>	<b>Binning</b>	<i>1 SDCM</i>
<b>Power</b>	<i>2 x 5W 24V</i>	<b>Colour Temperature</b>	<i>2700K</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Standard Finish</b>	<i>Black Powder Coat</i>

### Light Distribution Curve

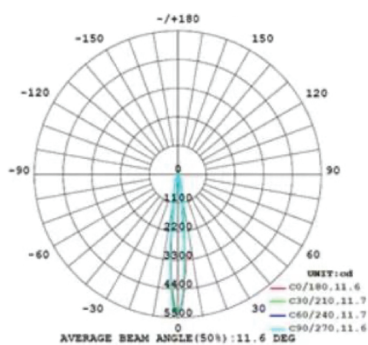

### Dimensions

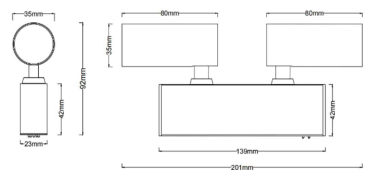

### Lux Distribution Curve

20° beam angle

	E(lx)	D(m)
1m	385	0.66
2m	171	1.00
3m	125	1.16
4m	96	1.33
5m	76	1.50