



Tilt.L

SKU: Tilt.L

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co



The Tilt.L comes with a 30° tilt lens installed as a standard feature, which significantly reduces glare. It is perfect for grazing and up-lighting requirements. It offers a generous output and compact size, making it ideal for use in residential environments, both indoors and outdoors.


The package comes with an installation sleeve, and the resin-filled cable entry and gland provide excellent protection against water ingress.

To ensure smooth dimming, we recommend using our range of PowerBank drivers.


Product Categories: *Uplights / Exterior*

Material	<i>Anodised Aluminium & Stainless Steel 316</i>	Beam Angle	<i>60° with a 30° tilt</i>
Lumen Output	<i>480Lm</i>	Cut Out	<i>Ø 66mm</i>
LED	<i>CREE MHB-A 1 pc SMD LED</i>	Fire & Acoustic Rated	-
Lifespan	<i>>50,000 hours</i>	IP Rating	<i>67</i>
CRI	<i>>90</i>	Working Temperature	-
Input Voltage	<i>DC</i>	Binning	-
Power	<i>6.7W 9.6V 700mA</i>	Colour Temperature	<i>3000K</i>
Power Factor	<i>>0.98</i>	Standard Finish	<i>Stainless Steel</i>


Light Distribution Curve

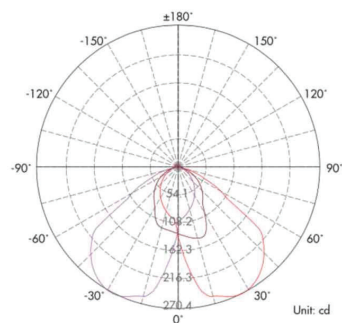

Dimensions

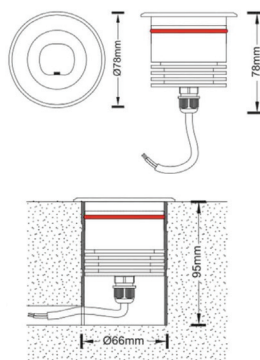

Lux Distribution Curve

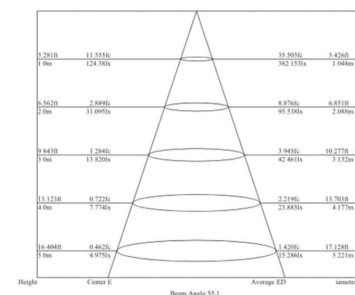

LIGHTING OF LONDON

Worlds End Studios, London, SW10 0RJ

<https://www.lightingoflondon.co>, +(44) 020 7139 5129

©All Rights Reserved