



Aim.70

Product Category: *Downlight*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Aim.70 is an elegantly designed downlight that can be used in both dry and humid interiors. Its sleek design, which features a deep black baffle and an ultra-slim aluminum powder-coated bezel, provides low glare and minimal architectural lighting.

The fitting allows for 20° of tilt and 180° of pan, enabling pinpoint accuracy of light. The Aim.70 also has an advanced heat sink that allows for cool running while requiring only 58mm height clearance.



This fitting can accommodate beam angles of 15°, 24°, 36°, or 60°, with Correlated Colour Temperatures (CCT) of 2700K, 3000K, or 4000K.

Material	<i>Aluminium</i>	Beam Angle	<i>15° / 24° / 36° / 60°</i>
Lumen Output	<i>710Lm</i>	Luminous Efficacy	<i>81lm / W</i>
Power	<i>8.75W 36V 250mA</i>	IP Rating	<i>54</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>60min</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>1 SDCM</i>
Size	<i>68.5mm x 58mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>62mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>

Dimensions

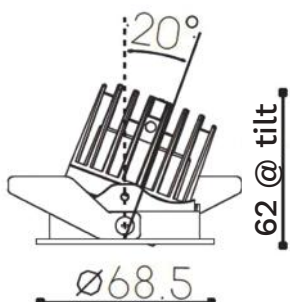

Lux Distribution Curve

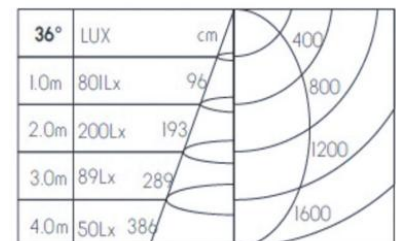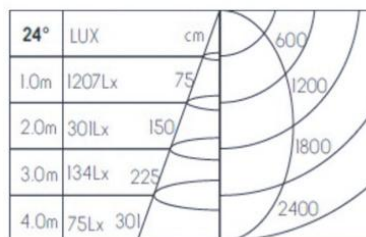



Bloc.P

Product Category: *Downlight*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co






The Bloc.P is part of our Bloc range – a contemporary lighting solution that seamlessly combines functionality and aesthetics to illuminate your space with style.

This sleek and sophisticated fixture is designed to bring a modern touch to any environment, whether it's a residential living space, commercial office, or hospitality venue.

With a choice between a 2700K, 300K, or 4000K output, the Bloc.P is the perfect plaster-in fitting to create a warm and beautiful ambiance.

Material	<i>Aluminium</i>	Beam Angle	<i>35° / 50°</i>
Lumen Output	<i>443Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>5.8W 11.66V 500mA</i>	IP Rating	<i>54</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Non dimmable driver supplied *</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>46mm x 105mm x 47mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>70mm x 55mm</i>		

**dimmable with Powerbank500.M - sold separately*

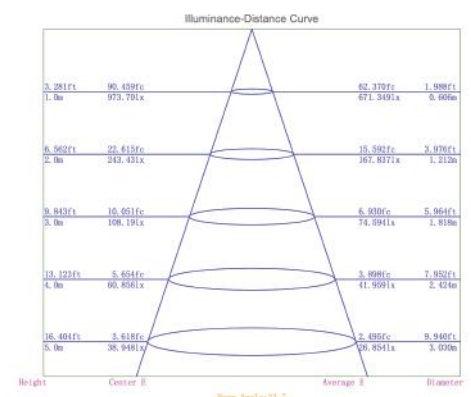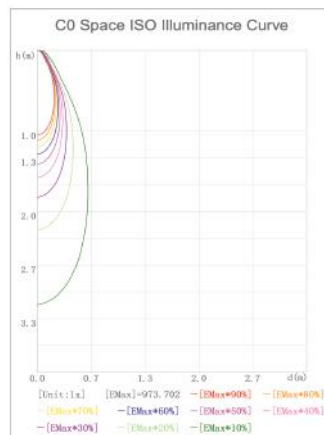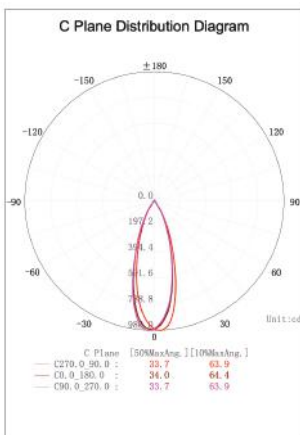



Bloc.R

Product Category: *Downlight*




t: +(44) 020 7139 5129 e: enquiries@lightingoflondon.co w: www.lightingoflondon.co



The Bloc.R is part of our Bloc range – a contemporary lighting solution that seamlessly combines functionality and aesthetics to illuminate your space with style. This sleek and sophisticated fixture is designed to bring a modern touch to any environment, whether it's a residential living space, commercial office, or hospitality venue. With a choice between a 2700K, 300K, or 4000K output, the Bloc.R is the perfect recessed fitting to create a warm and beautiful ambiance.

Material	<i>Aluminium</i>	Beam Angle	<i>35° / 50°</i>
Lumen Output	<i>443Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>5.8W 11.66V 500mA</i>	IP Rating	<i>54</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Non dimmable driver supplied *</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>46mm x 105mm x 47mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>70mm x 55mm</i>		

**dimmable with Powerbank500.M - sold separately*

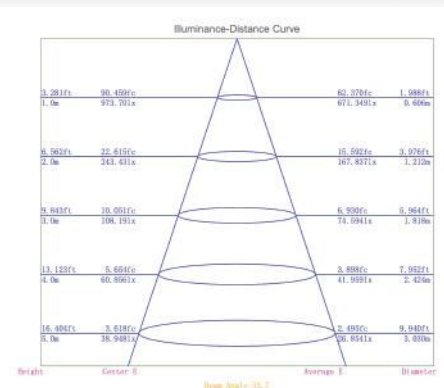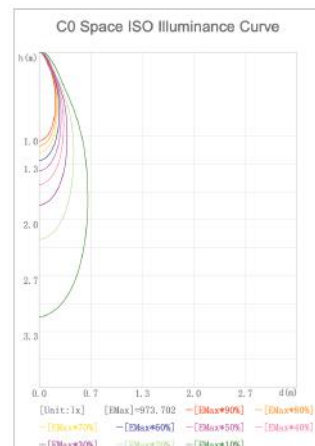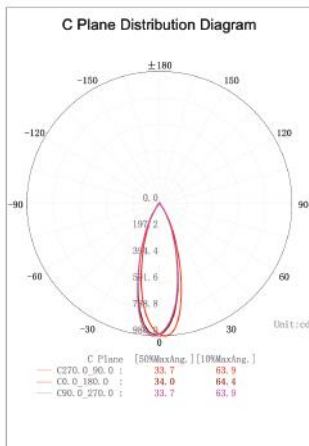



Follow.Me.P

Product Category: *Spotlights / Downlights*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The plaster-in FollowMe.P spotlight allows the user almost complete directional control. The adjustable cylindrical fitting can point in a 355° horizontal range, or, if a 90° vertical spotlight is desired, it can recess back into its fitting to sit flush against the ceiling.

With three beam angle options of a sharp 15°, a generous 24° or a wider 36°, one has ample options on how to highlight any wall or object.

Product Categories: *Spotlights / Downlights*

Material	<i>Aluminium</i>	Beam Angle	<i>15° / 24° / 36°</i>
Lumen Output	<i>600Lm</i>	Luminous Efficacy	<i>75lm / W</i>
Power	<i>8W 36V 180mA</i>	IP Rating	<i>21</i>
Dimmable	<i>Yes</i>	Driver Required	<i>TRIAC dimmable driver supplied</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>30mm x 65mm L</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>55mm</i>		

Dimensions

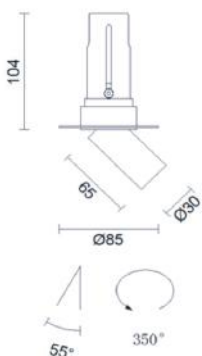

Lux Distribution Curve

15°

Height	Max E	Ave E	Diameter
3.28ft	Emax	E(lx)	1.02ft
1.0m	2,494 lx	1,742 lx	0.31m
6.56ft			2.07ft
2.0m	623 lx	436 lx	0.63m
9.84ft			3.12ft
3.0m	276 lx	193 lx	0.95m
13.12ft			4.17ft
4.0m	155 lx	108 lx	1.27m

24°

Height	Max E	Ave E	Diameter
3.28ft	Emax	E(lx)	1.41ft
1.0m	2,450 lx	1,721 lx	0.43m
6.56ft			2.85ft
2.0m	612 lx	430 lx	0.87m
9.84ft			4.10ft
3.0m	271 lx	191 lx	1.25m
13.12ft			5.71ft
4.0m	152 lx	107 lx	1.74m

36°

Height	Max E	Ave E	Diameter
3.28ft	Emax	E(lx)	1.61ft
1.0m	826 lx	578 lx	0.49m
6.56ft			3.25ft
2.0m	206 lx	144 lx	0.99m
9.84ft			4.89ft
3.0m	91 lx	64 lx	1.49m
13.12ft			6.53ft
4.0m	52 lx	36 lx	1.99m



Follow.Me.R

SKU: Follow.Me.R

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Follow.Me.R recessed spotlight is highly versatile, offering almost complete directional control to the user. It comes with an adjustable cylindrical fitting that can point in a 355° horizontal range. If a 90° vertical spotlight is needed, it can be recessed back into its fitting to sit flush with the ceiling. The Follow.Me.R is designed to blend seamlessly into its surroundings.

This spotlight comes with three beam angle options- a sharp 15°, a generous 24° or a wider 36°, giving you ample options to highlight any wall or object with a warm 2700k glow.

Product Categories: *Spotlights / Downlights*

Material	<i>Aluminium</i>	Beam Angle	<i>15° / 24° / 36°</i>
Lumen Output	<i>600Lm</i>	Luminous Efficacy	<i>75lm / W</i>
Power	<i>8W 36V 180mA</i>	IP Rating	<i>21</i>
Dimmable	<i>Yes</i>	Driver Required	<i>TRIAC dimmable driver supplied</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>30mm x 65mm L</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>50mm</i>		

Dimensions

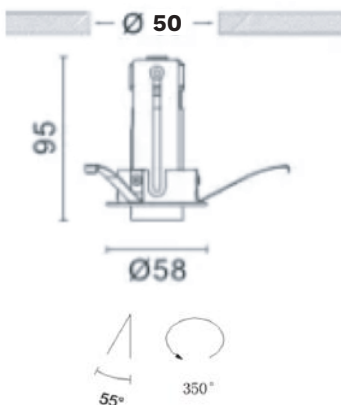

Lux Distribution Curve

15°

Height	Max E	Ave E	Diameter
3.28ft	Emax	E(lx)	1.02ft
1.0m	2494 lx	1742 lx	0.31m
6.56ft			2.07ft
2.0m	623 lx	436 lx	0.63m
9.84ft			3.12ft
3.0m	276 lx	193 lx	0.95m
13.12ft			4.17ft
4.0m	155 lx	108 lx	1.27m

24°

Height	Max E	Ave E	Diameter
3.28ft	Emax	E(lx)	1.41ft
1.0m	2450 lx	1721 lx	0.43m
6.56ft			2.85ft
2.0m	612 lx	430 lx	0.87m
9.84ft			4.10ft
3.0m	271 lx	191 lx	1.25m
13.12ft			5.71ft
4.0m	152 lx	107 lx	1.74m

36°

Height	Max E	Ave E	Diameter
3.28ft	Emax	E(lx)	1.61ft
1.0m	826 lx	578 lx	0.49m
6.56ft			3.25ft
2.0m	206 lx	144 lx	0.99m
9.84ft			4.89ft
3.0m	91 lx	64 lx	1.49m
13.12ft			6.53ft
4.0m	52 lx	36 lx	1.99m



Orb.M

Product Category: *Downlight*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Orb.M is a beautifully designed and compact surface-mounted spotlight. Its crystal lens provides a soft, gradient beam of light with a 35° angle, making it perfect for highlighting key design features.

The fitting is available in both sandy black and white, allowing it to blend seamlessly into any interior space.

Material	<i>Aluminium</i>	Beam Angle	<i>35°</i>
Lumen Output	<i>865Lm</i>	Luminous Efficacy	<i>78lm / W</i>
Power	<i>11W</i>	IP Rating	<i>54</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Dimmable driver built-in</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party controller required)</i>
Size	<i>80mm x 45mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>N/A</i>		

Dimensions

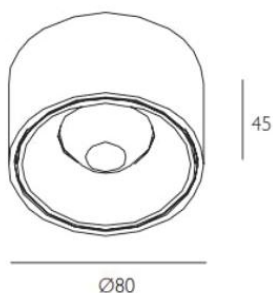



Orb.S

Product Category: *Downlight*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Orb.S is a beautifully designed and compact surface-mounted spotlight. Its crystal lens provides a soft, gradient beam of light with a 35° angle, making it perfect for highlighting key design features.

The fitting is available in both sandy black and white, allowing it to blend seamlessly into any interior space.

Material	<i>Aluminium</i>	Beam Angle	<i>35°</i>
Lumen Output	<i>430Lm</i>	Luminous Efficacy	<i>78lm / W</i>
Power	<i>5.5W</i>	IP Rating	<i>54</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Dimmable driver built-in</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party controller required)</i>
Size	<i>65mm x 45mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>N/A</i>		

Dimensions

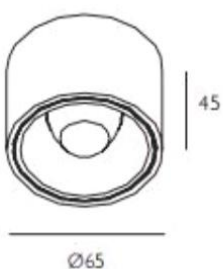



Peep.

Product Category: *Downlight*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Peep is a 3-step recessed trimless downlight that redefines ambient illumination with its exquisite design, versatile features, and unparalleled performance. You can customize the peep to your own specifications, choosing from a matt white or matt black powder finish, or from three beam angle options: a sharp 24°, a generous 36° or a wider 60°. With a choice between a 2700K, 300K, or 4000K glow, you have ample options on how to highlight any interior space or object.

Product Category: *Downlight*

Material	<i>Aluminium</i>	Beam Angle	<i>24° / 36° / 60°</i>
Lumen Output	<i>870Lm</i>	Luminous Efficacy	<i>87lm / W</i>
Power	<i>10W 36V 250mA</i>	IP Rating	<i>54</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes</i>
Size	<i>106mm x 55mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>65mm</i>		

Dimensions

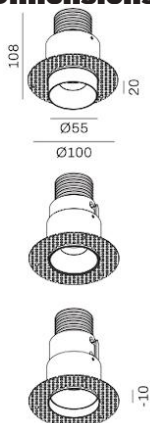

Lux Distribution Curve

h(m)	E(lx)	ø(m)
1	2259	ø0.38
2	564.8	ø0.77
3	251.0	ø1.16
4	141.2	ø1.54
5	90.37	ø1.93



Profile.40

Product Category: *Downlight*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Profile.40 is an elegantly designed downlight that can be used in both dry and humid interiors. Its sleek design, which features a deep black baffle and an ultra-slim aluminum powder-coated bezel, provides low glare and minimal architectural lighting.

The Profile.40 has a superior designed heat sink, allowing for cool running while only requiring 49mm height clearance.


The fitting comes can accommodate a 15°, 24°, or 36° beam, with Correlated Colour Temperatures (CCT) of 2700K, 3000K, or 4000K.

Material	<i>Aluminium</i>	Beam Angle	<i>15° / 24° / 36°</i>
Lumen Output	<i>160Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>2.1W 3V 700mA</i>	IP Rating	<i>54</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>60min</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>1 SDCM</i>
Size	<i>40mm x 49mm</i>	DALI Control	<i>Yes (third party driver required)</i>
Cut Out	<i>35mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>

Dimensions

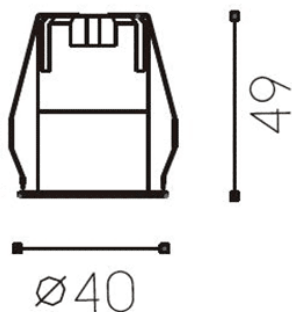

Lux Distribution Curve

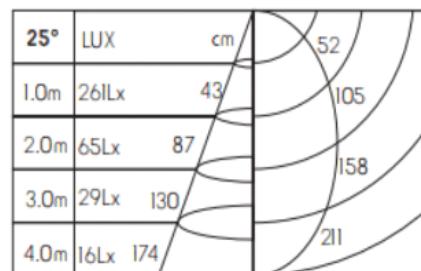



Profile.60

Product Category: *Downlight*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Profile.60 is an elegantly designed downlight that can be used in both dry and humid interiors. Its sleek design, which features a deep black baffle and an ultra-slim aluminum powder-coated bezel, provides low glare and minimal architectural lighting.

The Profile.60 has a superior designed heat sink, allowing for cool running while only requiring 56mm height clearance.



The fitting comes can accommodate a 20° or 36° beam, with Correlated Colour Temperatures (CCT) of 2700K, 3000K, or 4000K.

Material	<i>Aluminium</i>	Beam Angle	<i>20° / 36°</i>
Lumen Output	<i>710Lm</i>	Luminous Efficacy	<i>81lm / W</i>
Power	<i>8.75W 36V 250mA</i>	IP Rating	<i>54</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>60min</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>1 SDCM</i>
Size	<i>58mm x 56mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>50mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>

Dimensions

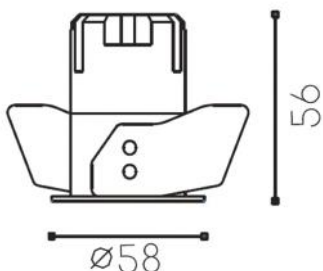

Lux Distribution Curve

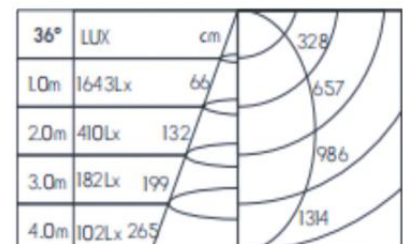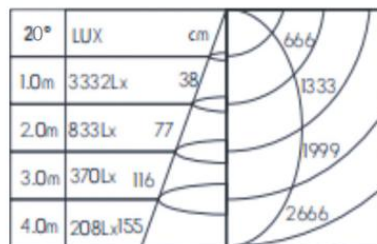



Snug.

Product Category: *Downlight*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Snug is a fixed recessed trimless downlight that redefines ambient illumination with its exquisite design, versatile features, and unparalleled performance.

You can customize the Snug to your own specifications, choosing from a matt white or matt black powder finish, or from three beam angle options: a sharp 24°, a generous 36° or a wider 60°.

With a choice between a 2700K, 300K, or 4000K glow, you have ample options on how to highlight any interior space or object.

Material	<i>Aluminium</i>	Beam Angle	<i>24° / 36° / 60°</i>
Lumen Output	<i>870Lm</i>	Luminous Efficacy	<i>87lm / W</i>
Power	<i>10W 36V 250mA</i>	IP Rating	<i>54</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes</i>
Size	<i>106mm x 55mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>65mm</i>		

Dimensions

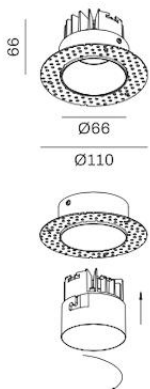

Lux Distribution Curve

h(m)	E(lx)	ø(m)
1	2259	ø0.38
2	564.8	ø0.77
3	251.0	ø1.16
4	141.2	ø1.54
5	90.37	ø1.93