



## Blade.

**Product Category:** *Low-level / Exterior*

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Blade is a discreet yet efficient recessed wall-mounted light that is designed to cater to your lighting requirements. The Blade light offers 30° of evenly distributed light, which beautifully highlight and mark its surroundings. This versatile light fixture is perfect for both indoor and outdoor applications, making it an ideal choice for both residential and commercial settings.


The Blade light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.

|                     |                                  |                           |  |
|---------------------|----------------------------------|---------------------------|--|
| <b>Material</b>     | <i>Aluminium</i>                 | <b>Beam Angle</b>         | <i>30°</i>                               |
| <b>Lumen Output</b> | <i>160Lm</i>                     | <b>Luminous Efficacy</b>  | <i>76lm / W</i>                          |
| <b>Power</b>        | <i>2.1W 3V 700mA</i>             | <b>IP Rating</b>          | <i>65</i>                                |
| <b>Dimmable</b>     | <i>Yes</i>                       | <b>Driver Required</b>    | <i>Yes</i>                               |
| <b>CRI</b>          | <i>&gt;95</i>                    | <b>Binning</b>            | <i>1 SDCM</i>                            |
| <b>Power Factor</b> | <i>&gt;0.98</i>                  | <b>DALI Control</b>       | <i>Yes (third party driver required)</i> |
| <b>Size</b>         | <i>55mm x 170mm</i>              | <b>Colour Temperature</b> | <i>2700K / 3000K / 4000K</i>             |
| <b>Cut Out</b>      | <i>158mm L x 50mm W x 68mm D</i> |                           |  |


### Light Distribution Curve

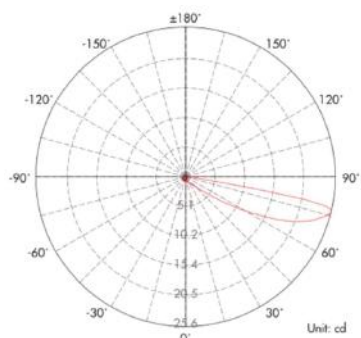

### Dimensions

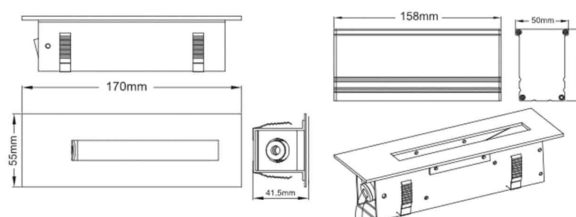

### Lux Distribution Curve

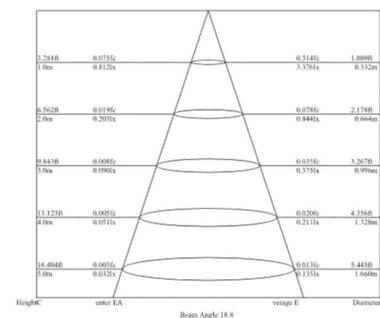



## Hide.

**Product Category:** *Low-level / Exterior*

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)








The Hide is a discreet yet efficient recessed wall-mounted light that is designed to cater to your lighting requirements. The Hide light offers 50° of evenly distributed light, which beautifully highlight and mark its surroundings. This versatile light fixture is perfect for both indoor and outdoor applications, making it an ideal choice for both residential and commercial settings.

The Hide light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.

|                     |                        |                           |  |
|---------------------|------------------------|---------------------------|--|
| <b>Material</b>     | <i>Aluminium</i>       | <b>Beam Angle</b>         | <i>50°</i>                               |
| <b>Lumen Output</b> | <i>80Lm</i>            | <b>Luminous Efficacy</b>  | <i>76lm / W</i>                          |
| <b>Power</b>        | <i>1.05W 3V 350mA</i>  | <b>IP Rating</b>          | <i>65</i>                                |
| <b>Dimmable</b>     | <i>Yes</i>             | <b>Driver Required</b>    | <i>Yes</i>                               |
| <b>CRI</b>          | <i>&gt;95</i>          | <b>Binning</b>            | <i>1 SDCM</i>                            |
| <b>Power Factor</b> | <i>&gt;0.98</i>        | <b>DALI Control</b>       | <i>Yes (third party driver required)</i> |
| <b>Size</b>         | <i>55mm x 70mm</i>     | <b>Colour Temperature</b> | <i>2700K / 3000K / 4000K</i>             |
| <b>Cut Out</b>      | <i>45mm W x 60mm H</i> |                           |  |

## Dimensions

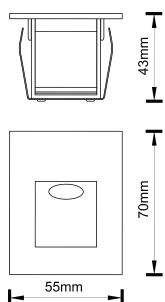



## Lunar.

Product Category: *Exterior*

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)



Lunar is an exquisitely crafted exterior spike light, designed to enhance the aesthetics of your outdoor space, whilst emitting a beautiful diffused light. The 2700K output of light adds a warming ambience to any exterior space.

Available in genuine brushed brass or anodised aluminium, the Lunar boasts a durable and weather-resistant exterior, ensuring longevity and resilience against the elements.

|              |                                |                    |  |
|--------------|--------------------------------|--------------------|--|
| Material     | <i>Aluminium / Solid Brass</i> | Luminous Efficacy  | <i>75lm / W</i>                          |
| Lumen Output | <i>120Lm</i>                   | IP Rating          | <i>65</i>                                |
| Power        | <i>1.6W 3.2V 500mA</i>         | Driver Required    | <i>Yes</i>                               |
| Dimmable     | <i>Yes</i>                     | Binning            | <i>1 SDCM</i>                            |
| CRI          | <i>&gt;95</i>                  | DALI Control       | <i>Yes (third party driver required)</i> |
| Power Factor | <i>&gt;0.98</i>                | Colour Temperature | <i>2700K</i>                             |
| Size         | <i>990mm</i>                   |                    |  |
| Cut Out      | <i>N/A</i>                     |                    |  |

### Dimensions





## Mark.

Product Category: *Exterior*

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)


w: [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Mark is a compact yet sturdy light fixture that casts a gentle, low-level ground wash effect, making it ideal for illuminating driveways and paths with its wide 100° beam angle. It is versatile, suitable for both indoor and outdoor use, and comes with an installation sleeve for easy setup. Additionally, its resin-filled cable entry and gland offer exceptional protection against water ingress, ensuring long-lasting performance in various weather conditions.

|              |                                 |                    |                                   |
|--------------|---------------------------------|--------------------|-----------------------------------|
| Material     | Aluminium & Stainless Steel 316 | Beam Angle         | 100°                              |
| Lumen Output | 160Lm                           | Luminous Efficacy  | 76lm / W                          |
| Power        | 2.1W 3V 700mA                   | IP Rating          | 67                                |
| Dimmable     | Yes                             | Driver Required    | Yes                               |
| CRI          | >95                             | Binning            | 1 SDCM                            |
| Power Factor | >0.98                           | DALI Control       | Yes (third party driver required) |
| Size         | ø60mm x 75mm                    | Colour Temperature | 2700K                             |
| Cut Out      | 40mm                            |                    |                                   |

### Light Distribution Curve

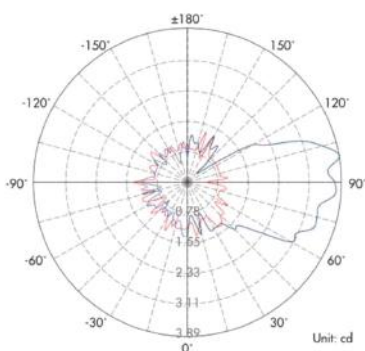

### Dimensions

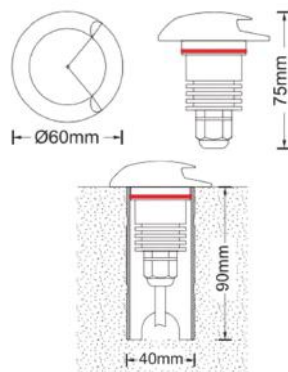

### Lux Distribution Curve

| Illuminance at a Distance |                 |            |      |
|---------------------------|-----------------|------------|------|
|                           | Center Beam LUX | Beam Width |      |
|                           |                 | V          | H    |
| 2m                        | 0.30 LUX        | 9.6m       | 1.4m |
| 4m                        | 0.07 LUX        | 19.3m      | 2.8m |
| 6m                        | 0.03 LUX        | 28.9m      | 4.2m |
| 8m                        | 0.02 LUX        | 38.6m      | 5.6m |
| 10m                       | 0.01 LUX        | 48.2m      | 6.9m |
| 12m                       | 0.01 LUX        | 57.8m      | 8.3m |

Vert Spread: 135.0H  
Horiz Spread: 38.3



## Moon.

Product Category: *Exterior*

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)


w: [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Moon is a discreet spike or surface-mounted light fixture that is suitable for walkways, driveways, garden beds, and borders. This fitting provides full 360° even lighting, which beautifully highlights the surroundings. With its unique color finish, it is virtually invisible in any environment. The Moon is supplied with a surface mount and ground spike, suitable for exterior applications. The cable entry and gland are filled with resin, which provides excellent protection against water damage. For optimal dimming performance, we recommend using our range of PowerBank drivers.

|              |                                 |                    |           |
|--------------|---------------------------------|--------------------|-----------|
| Material     | Aluminium & Stainless Steel 316 | Beam Angle         | 100°      |
| Lumen Output | 700Lm                           | Luminous Efficacy  | 111lm / W |
| Power        | 6.3W 18V 350mA                  | IP Rating          | 65        |
| Dimmable     | Yes                             | Driver Required    | Yes       |
| CRI          | >95                             | Binning            | 1 SDCM    |
| Power Factor | >0.98                           | DALI Control       | Yes       |
| Size         | Ø150mm x 570mm                  | Colour Temperature | 2700K     |
| Cut Out      | N/A                             |                    |           |


### Light Distribution Curve

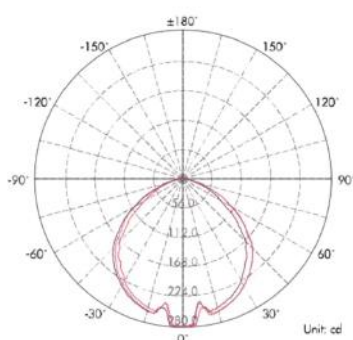

### Dimensions

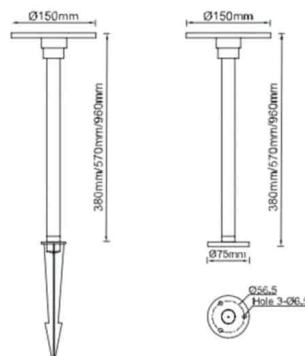

### Lux Distribution Curve

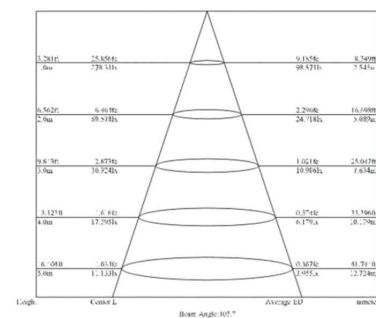



## Pin.

**Product Category:** *Low-level / Exterior*

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)


**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Pin is a discreet yet efficient recessed wall-mounted light that is designed to cater to your lighting requirements. The Pin light offers 30° of evenly distributed light, which beautifully highlight and mark its surroundings. This versatile light fixture is perfect for both indoor and outdoor applications, making it an ideal choice for both residential and commercial settings. The Pin light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.

|                     |                      |                           |  |
|---------------------|----------------------|---------------------------|--|
| <b>Material</b>     | <i>Aluminium</i>     | <b>Beam Angle</b>         | <i>30°</i>                               |
| <b>Lumen Output</b> | <i>160Lm</i>         | <b>Luminous Efficacy</b>  | <i>76lm / W</i>                          |
| <b>Power</b>        | <i>2.1W 3V 700mA</i> | <b>IP Rating</b>          | <i>65</i>                                |
| <b>Dimmable</b>     | <i>Yes</i>           | <b>Driver Required</b>    | <i>Yes</i>                               |
| <b>CRI</b>          | <i>&gt;95</i>        | <b>Binning</b>            | <i>1 SDCM</i>                            |
| <b>Power Factor</b> | <i>&gt;0.98</i>      | <b>DALI Control</b>       | <i>Yes (third party driver required)</i> |
| <b>Size</b>         | <i>70mm x 70mm</i>   | <b>Colour Temperature</b> | <i>2700K / 3000K / 4000K</i>             |
| <b>Cut Out</b>      | <i>Ø 62mm</i>        |                           |  |

### Light Distribution Curve

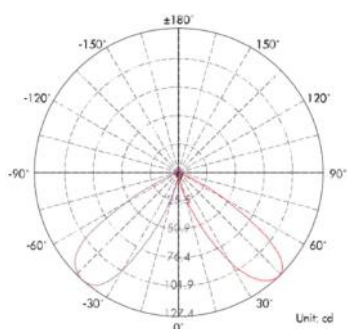

### Dimensions

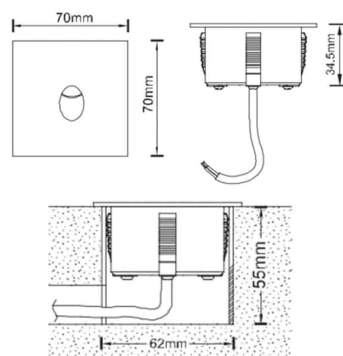

### Lux Distribution Curve

| Height   | Center E | Beam Angle: 32.8 | Average E | Diameter |
|----------|----------|------------------|-----------|----------|
| 3.281ft  | 0.176fc  |                  | 4.998fc   | 1.933ft  |
| 1.0m     | 5.127lx  |                  | 53.802lx  | 0.589m   |
| 6.562ft  | 0.119fc  |                  | 1.250fc   | 3.885ft  |
| 2.0m     | 1.282lx  |                  | 13.451lx  | 1.178m   |
| 9.843ft  | 0.053fc  |                  | 0.556fc   | 5.799ft  |
| 3.0m     | 0.570lx  |                  | 5.978lx   | 1.767m   |
| 13.123ft | 0.030fc  |                  | 0.312fc   | 7.731ft  |
| 1.0m     | 0.320lx  |                  | 3.363lx   | 2.306m   |
| 16.401ft | 0.019fc  |                  | 0.200fc   | 9.663ft  |
| 5.0m     | 0.205lx  |                  | 2.152lx   | 9.915m   |



## Spot.M

Product Category: *Exterior / Spotlights*

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)


w: [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Spot.M is a compact but powerful lighting solution that can be used both indoors and outdoors. The Spot.M provides a beautiful output to illuminate any surface or target. With its unique color finish, it can blend in seamlessly with any environment. For outdoor settings, a ground spike is included for easy positioning, and the resin-filled cable entry and gland provide the ultimate protection against water damage. For smooth dimming, our range of PowerBank drivers can be used with the Spot.M.

|              |                    |                    |                                   |
|--------------|--------------------|--------------------|-----------------------------------|
| Material     | Anodised Aluminium | Beam Angle         | 15° / 36° / 60°                   |
| Lumen Output | 600Lm              | Luminous Efficacy  | 111lm / W                         |
| Power        | 6.8W 9.7V 700mA    | IP Rating          | 67                                |
| Dimmable     | Yes                | Driver Required    | Yes                               |
| CRI          | >95                | Binning            | 1 SDCM                            |
| Power Factor | >0.98              | DALI Control       | Yes (third party driver required) |
| Size         | ø44mm x 90mm L     | Colour Temperature | 2700K                             |
| Cut Out      | N/A                |                    |                                   |


### Light Distribution Curve



### Dimensions

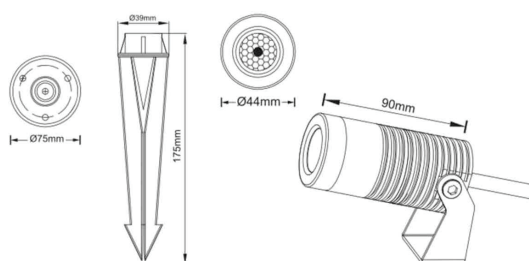

### Lux Distribution Curve

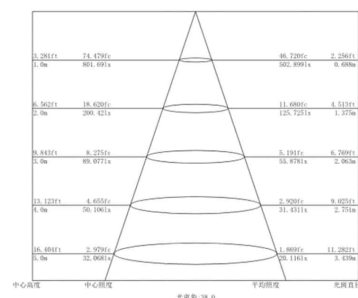



## Spot.S

Product Category: *Exterior / Spotlights*

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)


w: [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Spot.S is a compact but powerful lighting solution that can be used both indoors and outdoors. The Spot.S provides a beautiful output to illuminate any surface or target. With its unique color finish, it can blend in seamlessly with any environment. For outdoor settings, a ground spike is included for easy positioning, and the resin-filled cable entry and gland provide the ultimate protection against water damage. For smooth dimming, our range of PowerBank drivers can be used with the Spot.S.

|              |                    |                    |                                   |
|--------------|--------------------|--------------------|-----------------------------------|
| Material     | Anodised Aluminium | Beam Angle         | 15° / 30° / 45°                   |
| Lumen Output | 160Lm              | Luminous Efficacy  | 85lm / W                          |
| Power        | 2.1W 3V 700mA      | IP Rating          | 67                                |
| Dimmable     | Yes                | Driver Required    | Yes                               |
| CRI          | >95                | Binning            | 1 SDCM                            |
| Power Factor | >0.98              | DALI Control       | Yes (third party driver required) |
| Size         | ø28mm x 39mm       | Colour Temperature | 2700K                             |
| Cut Out      | N/A                |                    |                                   |

### Light Distribution Curve

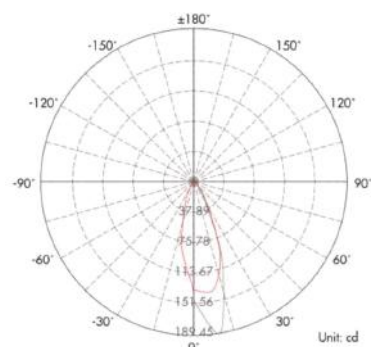

### Dimensions

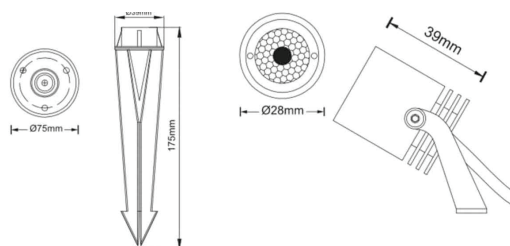

### Lux Distribution Curve

| Illuminance at a Distance |                 |            |
|---------------------------|-----------------|------------|
|                           | Center Beam LUX | Beam Width |
|                           | V               | H          |
| 2m                        | 33.42 LUX       | 1.1m 1.0m  |
| 4m                        | 8.35 LUX        | 2.2m 2.0m  |
| 6m                        | 3.71 LUX        | 3.3m 3.0m  |
| 8m                        | 2.09 LUX        | 4.3m 4.0m  |
| 10m                       | 1.34 LUX        | 5.4m 5.1m  |
| 12m                       | 0.93 LUX        | 6.5m 6.1m  |

Vert.Spread:30.4 Horiz.Spread:28.4





## Spot.Z

Product Category: *Exterior / Spotlights*

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)

**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Spot.Z provides the ability to pinpoint any surface or target to create the most dramatic designs. The fully zoomable lens provides a beam from 10° to 40°, and with our unique colour finish it's virtually invisible in any environment.


This device can be used both indoors and outdoors, and it comes with a ground spike for external positioning. Additionally, it has a resin-filled cable entry and gland that provides ultimate protection against water ingress. To ensure that it can be smoothly dimmed, our range of PowerBank drivers is available.

|              |                    |                    |                                   |
|--------------|--------------------|--------------------|-----------------------------------|
| Material     | Anodised Aluminium | Beam Angle         | 10 - 40°                          |
| Lumen Output | 500Lm              | Luminous Efficacy  | 79lm / W                          |
| Power        | 6.3W 9V 700mA      | IP Rating          | 67                                |
| Dimmable     | Yes                | Driver Required    | Yes                               |
| CRI          | >95                | Binning            | 1 SDCM                            |
| Power Factor | >0.98              | DALI Control       | Yes (third party driver required) |
| Size         | ø52mm x 103mm      | Colour Temperature | 2700K                             |
| Cut Out      | N/A                |                    |                                   |

### Light Distribution Curve

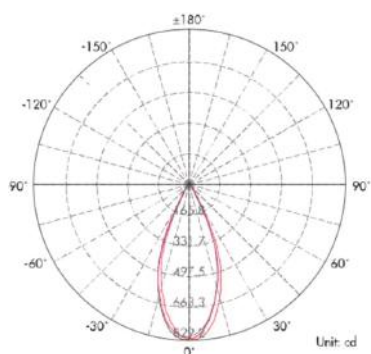

### Dimensions

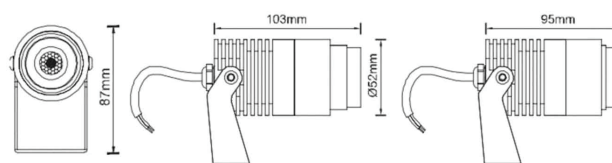

### Lux Distribution Curve

| Height   | Center L | Beam Angle: 42.0 | Average L | Diameter |
|----------|----------|------------------|-----------|----------|
| 3.281ft  | 75.919lx |                  | 50.517lx  | 2.516ft  |
| 1.0m     | 817.20lx |                  | 543.770lx | 0.767m   |
| 6.562ft  | 18.980lx |                  | 12.629lx  | 5.031ft  |
| 2.0m     | 204.30lx |                  | 135.943lx | 1.534m   |
| 9.843ft  | 8.435lx  |                  | 5.613lx   | 7.547ft  |
| 3.0m     | 90.800lx |                  | 60.419lx  | 2.300m   |
| 13.123ft | 4.745lx  |                  | 3.157lx   | 10.063ft |
| 4.0m     | 51.075lx |                  | 33.986lx  | 3.067m   |
| 16.404ft | 3.037lx  |                  | 2.021lx   | 12.578ft |
| 5.0m     | 32.688lx |                  | 21.751lx  | 3.834m   |



## Sqube.M

**Product Category:** *Exterior / Spotlights*

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)


**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)



The Sqube.M is where contemporary design meets outdoor illumination. The light output of Sqube creates a warm and inviting atmosphere, ideal for accentuating architectural features, landscaping elements, or creating an ambient glow for outdoor gatherings. Sqube's three different beam angles provides options for a focused and directional illumination, perfect for highlighting specific areas or architectural details in your outdoor space.

|                     |                           |                           |  |
|---------------------|---------------------------|---------------------------|--|
| <b>Material</b>     | <i>Anodised Aluminium</i> | <b>Beam Angle</b>         | <i>15° / 36° / 60°</i>                   |
| <b>Lumen Output</b> | <i>870Lm</i>              | <b>Luminous Efficacy</b>  | <i>97lm / W</i>                          |
| <b>Power</b>        | <i>8.9W 17.9V 500mA</i>   | <b>IP Rating</b>          | <i>65</i>                                |
| <b>Dimmable</b>     | <i>Yes</i>                | <b>Driver Required</b>    | <i>Yes</i>                               |
| <b>CRI</b>          | <i>&gt;95</i>             | <b>Binning</b>            | <i>1 SDCM</i>                            |
| <b>Power Factor</b> | <i>&gt;0.98</i>           | <b>DALI Control</b>       | <i>Yes (third party driver required)</i> |
| <b>Size</b>         | <i>70mm x 70mm x 70mm</i> | <b>Colour Temperature</b> | <i>2700K</i>                             |
| <b>Cut Out</b>      | <i>N/A</i>                |                           |  |

### Dimensions

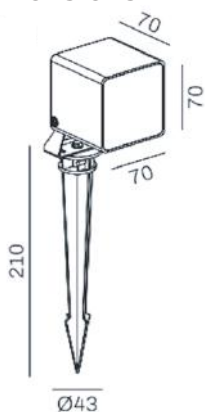

### Lux Distribution Curve

| h(m) | E(lx) | ø(m)  |
|------|-------|-------|
| 1    | 1539  | ø0.65 |
| 2    | 384.8 | ø1.30 |
| 3    | 171.0 | ø1.95 |
| 4    | 96.20 | ø2.61 |
| 5    | 61.57 | ø3.26 |



## Sqube.S

Product Category: *Exterior / Spotlights*

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)


**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)



The Sqube.S is where contemporary design meets outdoor illumination. The light output of Sqube creates a warm and inviting atmosphere, ideal for accentuating architectural features, landscaping elements, or creating an ambient glow for outdoor gatherings. Sqube's three different beam angles provide options for a focused and directional illumination, perfect for highlighting specific areas or architectural details in your outdoor space.

|                     |                           |                           |  |
|---------------------|---------------------------|---------------------------|--|
| <b>Material</b>     | <i>Anodised Aluminium</i> | <b>Beam Angle</b>         | <i>15° / 36° / 60°</i>                   |
| <b>Lumen Output</b> | <i>445Lm</i>              | <b>Luminous Efficacy</b>  | <i>75lm / W</i>                          |
| <b>Power</b>        | <i>5.9W 17V 350mA</i>     | <b>IP Rating</b>          | <i>65</i>                                |
| <b>Dimmable</b>     | <i>Yes</i>                | <b>Driver Required</b>    | <i>Yes</i>                               |
| <b>CRI</b>          | <i>&gt;95</i>             | <b>Binning</b>            | <i>1 SDCM</i>                            |
| <b>Power Factor</b> | <i>&gt;0.98</i>           | <b>DALI Control</b>       | <i>Yes (third party driver required)</i> |
| <b>Size</b>         | <i>50mm x 50mm x 50mm</i> | <b>Colour Temperature</b> | <i>2700K</i>                             |
| <b>Cut Out</b>      | <i>N/A</i>                |                           |  |

### Dimensions

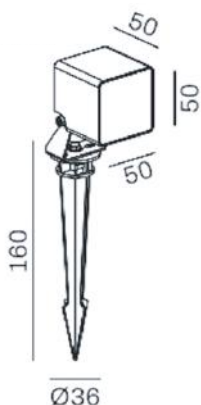

### Lux Distribution Curve

| h(m) | E(lx) | ø(m)  |
|------|-------|-------|
| 1    | 1692  | ø0.38 |
| 2    | 423.0 | ø0.76 |
| 3    | 188.0 | ø1.14 |
| 4    | 105.7 | ø1.52 |
| 5    | 67.68 | ø1.90 |