



Blade.

Product Category: *Low-level / Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Blade is a discreet yet efficient recessed wall-mounted light that is designed to cater to your lighting requirements. The Blade light offers 30° of evenly distributed light, which beautifully highlight and mark its surroundings. This versatile light fixture is perfect for both indoor and outdoor applications, making it an ideal choice for both residential and commercial settings.


The Blade light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.

Material	<i>Aluminium</i>	Beam Angle	<i>30°</i>
Lumen Output	<i>160Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>2.1W 3V 700mA</i>	IP Rating	<i>65</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>55mm x 170mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>158mm L x 50mm W x 68mm D</i>		


Light Distribution Curve

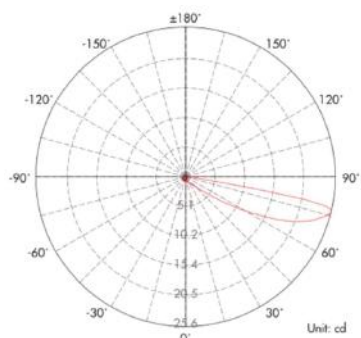

Dimensions

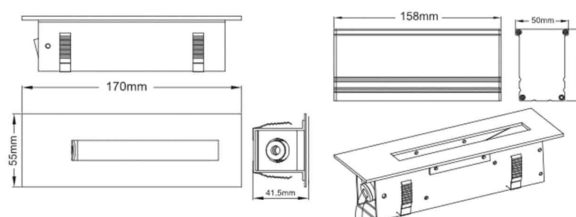

Lux Distribution Curve

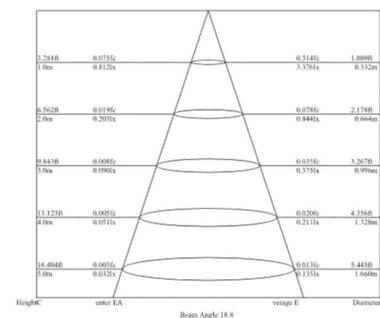



Hide.

Product Category: *Low-level / Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co








The Hide is a discreet yet efficient recessed wall-mounted light that is designed to cater to your lighting requirements. The Hide light offers 50° of evenly distributed light, which beautifully highlight and mark its surroundings. This versatile light fixture is perfect for both indoor and outdoor applications, making it an ideal choice for both residential and commercial settings.

The Hide light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.

Material	<i>Aluminium</i>	Beam Angle	<i>50°</i>
Lumen Output	<i>80Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>1.05W 3V 350mA</i>	IP Rating	<i>65</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>55mm x 70mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>45mm W x 60mm H</i>		

Dimensions

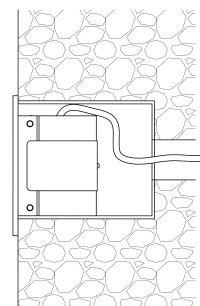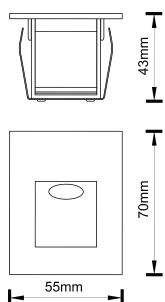



Niche.L

Product Category: *Low-level*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Niche.L is a revolutionary low-level step light plaster that seamlessly combines form and function to elevate your space. Immerse your space in a gentle glow with our low-level plaster-in light fixtures that redefine ambient lighting. Niche boasts a minimalist and contemporary design that effortlessly integrates into any architectural style. Its sleek and unobtrusive profile adds a touch of sophistication to your stairs, hallways, and interior spaces.

Material	Aluminium	Luminous Efficacy	76lm / W
Lumen Output	160Lm	IP Rating	21
Power	2.1W 3V 700mA	Driver Required	Yes
Dimmable	Yes	Binning	1 SDCM
CRI	>95	DALI Control	Yes (third party driver required)
Power Factor	>0.98	Colour Temperature	2700K / 3000K / 4000K
Size	25mm x 150mm (Opening)		
Cut Out	30mm x 215mm		

Dimensions

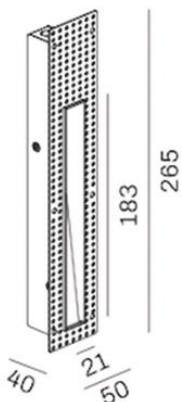

Lux Distribution Curve



h(m)	E(lx)	ø(m)
1	15.47	ø0.74
2	3.867	ø1.49
3	1.719	ø2.23
4	0.966	ø2.98
5	0.618	ø3.73



Niche.M

Product Category: *Low-level*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Niche.M is a revolutionary low-level step light plaster that seamlessly combines form and function to elevate your space. Immerse your space in a gentle glow with our low-level plaster-in light fixtures that redefine ambient lighting. Niche boasts a minimalist and contemporary design that effortlessly integrates into any architectural style. Its sleek and unobtrusive profile adds a touch of sophistication to your stairs, hallways, and interior spaces.

Material	Aluminium	Luminous Efficacy	76lm / W
Lumen Output	160Lm	IP Rating	21
Power	2.1W 3V 700mA	Driver Required	Yes
Dimmable	Yes	Binning	1 SDCM
CRI	>95	DALI Control	Yes (third party driver required)
Power Factor	>0.98	Colour Temperature	2700K / 3000K / 4000K
Size	65mm x 50mm (Opening)		
Cut Out	70mm x 110mm		

Dimensions

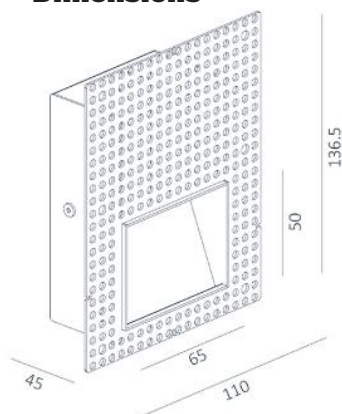

Lux Distribution Curve



h(m)	E(lx)	ø(m)
1	16.96	ø0.53
2	4.240	ø1.06
3	1.884	ø1.59
4	1.060	ø2.12
5	0.678	ø2.65



Niche.S

Product Category: *Low-level*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Niche.S is a revolutionary low-level step light plaster that seamlessly combines form and function to elevate your space. Immerse your space in a gentle glow with our low-level plaster-in light fixtures that redefine ambient lighting. Niche boasts a minimalist and contemporary design that effortlessly integrates into any architectural style. Its sleek and unobtrusive profile adds a touch of sophistication to your stairs, hallways, and interior spaces.

Material	Aluminium	Luminous Efficacy	76lm / W
Lumen Output	160Lm	IP Rating	21
Power	2.1W 3V 700mA	Driver Required	Yes
Dimmable	Yes	Binning	1 SDCM
CRI	>95	DALI Control	Yes (third party driver required)
Power Factor	>0.98	Colour Temperature	2700K / 3000K / 4000K
Size	35mm x 55mm (Opening)		
Cut Out	70mm x 110mm		

Dimensions

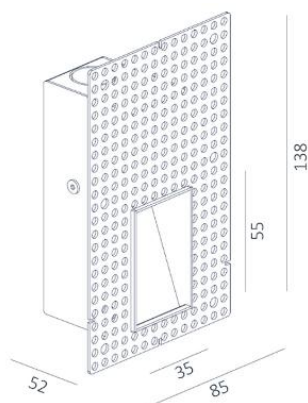

Lux Distribution Curve



h(m)	E(lx)	ø(m)
1	21.23	ø0.65
2	5.307	ø1.31
3	2.359	ø1.96
4	1.327	ø2.61
5	0.849	ø3.27



Pin.

Product Category: *Low-level / Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Pin is a discreet yet efficient recessed wall-mounted light that is designed to cater to your lighting requirements. The Pin light offers 30° of evenly distributed light, which beautifully highlight and mark its surroundings. This versatile light fixture is perfect for both indoor and outdoor applications, making it an ideal choice for both residential and commercial settings. The Pin light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.

Material	<i>Aluminium</i>	Beam Angle	<i>30°</i>
Lumen Output	<i>160Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>2.1W 3V 700mA</i>	IP Rating	<i>65</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>1 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>70mm x 70mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>Ø 62mm</i>		


Light Distribution Curve

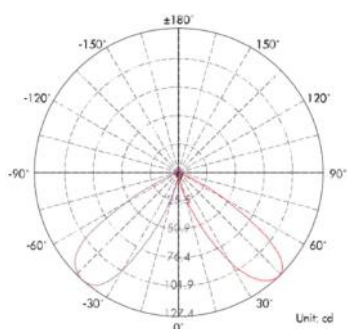

Dimensions

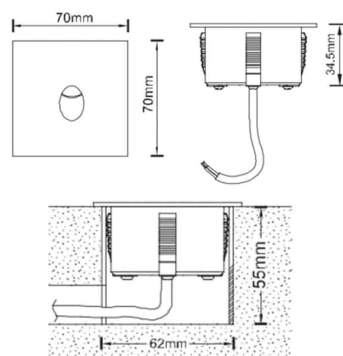

Lux Distribution Curve

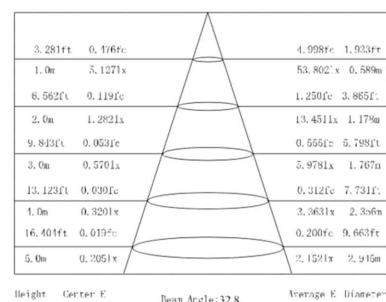



Seek.

Product Category: *Reading Lights*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co



The Seek is a discreet yet efficient recessed reading light that is designed to cater to your lighting requirements.


The Seek light offers 30° of evenly distributed light, which beautifully highlights any bedhead position and its surroundings.

The Seek light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.


Material	Aluminium	Beam Angle	30°
Lumen Output	120Lm	Luminous Efficacy	80lm / W
Power	1.5W 3V 700mA	IP Rating	21
Dimmable	N/A	Driver Required	Non dimmable driver built-in*
CRI	>95	Binning	1 SDCM
Power Factor	>0.98	DALI Control	N/A
Size	80mm x 110mm	Colour Temperature	2700K
Cut Out	Ø70mm x 50mm Depth		

Light Distribution Curve

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

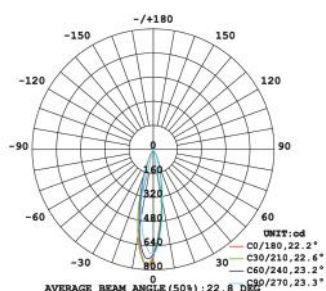


Dimensions

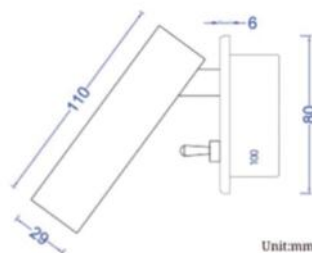

Cutout size : D70 x H50mm

Lux Distribution Curve

Flux out: 59.16 lm

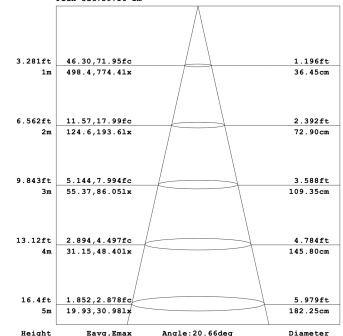



Uno.

Product Category: *Reading Lights*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co



The Uno is a discreet yet efficient recessed reading light that is designed to cater to your lighting requirements.


The Uno light offers 30° of evenly distributed light, which beautifully highlights any bedhead position and its surroundings.

The Uno light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.


Material	Aluminium	Beam Angle	30°
Lumen Output	120Lm	Luminous Efficacy	80lm / W
Power	1.5W 3V 700mA	IP Rating	21
Dimmable	N/A	Driver Required	Non dimmable driver built-in*
CRI	>95	Binning	1 SDCM
Power Factor	>0.98	DALI Control	N/A
Size	78mm x 183mm	Colour Temperature	2700K
Cut Out	155mm H x 55mm W x 40mm D		

Light Distribution Curve

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

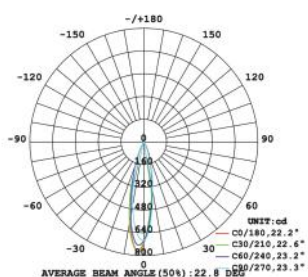

Dimensions

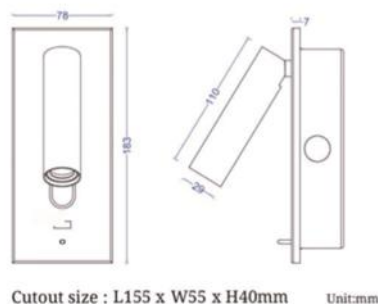

Lux Distribution Curve

