



## Beam.S

Product Category: *Uplights/ Exterior*

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)


w: [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Beam.S is a versatile and inconspicuous lighting solution designed to meet a variety of needs, including grazing and up-lighting. This innovative product emits a stunning beam of light, with the flexibility to choose from 15°, 30°, and 45° angles, all while maintaining a beautiful warm output. Whether you require lighting for interior or exterior settings, the Beam.S is up to the task, and it even comes with an installation sleeve for added convenience. Moreover, its resin-filled cable entry and gland ensure the highest level of protection against water ingress, making it a reliable choice for both indoor and outdoor applications.

Material	Aluminium & Stainless Steel 316	Beam Angle	15° / 30° / 45°
Lumen Output	80Lm	Luminous Efficacy	76lm / W
Power	1.05W 3V 350mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	28mm x 46mm L	Colour Temperature	2700K / 3000K
Cut Out	23mm		

### Light Distribution Curve



### Dimensions

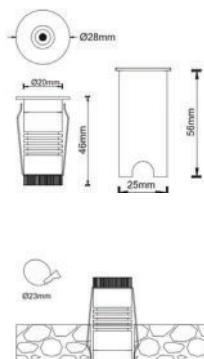

### Lux Distribution Curve

	Illuminance at a Distance	
	Center Beam LUX	Beam Width V H
2m	182.33 LUX	1.2m 1.2m
4m	45.58 LUX	2.3m 2.4m
6m	20.26 LUX	3.5m 3.6m
8m	11.40 LUX	4.7m 4.8m
10m	7.29 LUX	5.8m 6.0m
12m	5.06 LUX	7.0m 7.2m
Vert.Spread:32.5		Horiz.Spread:33.2