



Beam.S.Q

Product Category: *Uplights/ Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Beam.S.Q is a multi-functional and inconspicuous lighting solution ideal for grazing and up-lighting applications, both indoors and outdoors. Its refined design ensures it emits a striking beam of light, offering flexibility with angles of 15°, 30°, and 45°, and a warm colour temperature of 2700K or 3000K. The fixture boasts robust protection from water ingress with its resin-filled cable entry and gland, and comes complete with an installation sleeve for added convenience.

Material	<i>Aluminium & Stainless Steel 316</i>	Beam Angle	<i>15° / 30° / 45°</i>
Lumen Output	<i>80Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>1.05W 3V 350mA</i>	IP Rating	<i>67</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>2 - 3 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>28mm x 46mm</i>	Colour Temperature	<i>2700K / 3000K</i>
Cut Out	<i>23mm</i>		

Light Distribution Curve



Dimensions

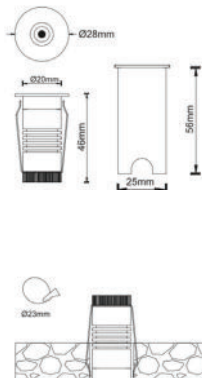

Lux Distribution Curve

Distance (m)	Illuminance at a Distance	
	Center Beam LUX	Beam Width (V x H)
2m	182.33 LUX	1.2m x 1.2m
4m	45.58 LUX	2.3m x 2.4m
6m	20.26 LUX	3.5m x 3.6m
8m	11.40 LUX	4.7m x 4.8m
10m	7.29 LUX	5.8m x 6.0m
12m	5.06 LUX	7.0m x 7.2m

Vert. Spread: 32.5° Horiz. Spread: 33.2°