



## Beam.Z

Product Category: *Uplights/ Exterior*

t: +(44) 020 7139 5129

e: [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)


w: [www.lightingoflondon.co](http://www.lightingoflondon.co)




The innovative Beam.Z lighting system offers the flexibility to precisely pinpoint or target any surface, allowing for the creation of breathtaking and dramatic designs. With a fully zoomable lens that provides a beam angle ranging from 15° to 50°, this system is designed to meet various lighting needs. Its versatility makes it suitable for both interior and exterior applications. Additionally, the inclusion of an installation sleeve, along with the resin-filled cable entry and gland, ensures comprehensive protection from water ingress.

<b>Material</b>	<i>Aluminium &amp; Stainless Steel 316</i>	<b>Beam Angle</b>	<i>15° - 50°</i>
<b>Lumen Output</b>	<i>590Lm</i>	<b>Luminous Efficacy</b>	<i>88lm / W</i>
<b>Power</b>	<i>6.7W 9.7V 700mA</i>	<b>IP Rating</b>	<i>67</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Driver Required</b>	<i>Yes</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>DALI Control</b>	<i>Yes (third party driver required)</i>
<b>Size</b>	<i>Ø80mm x 91mm L</i>	<b>Colour Temperature</b>	<i>2700K / 3000K</i>
<b>Cut Out</b>	<i>70mm</i>		

### Light Distribution Curve



### Dimensions

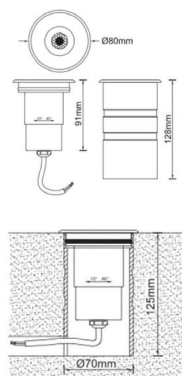

### Lux Distribution Curve

