



## Tilt.M

Product Category: *Uplights/ Exterior*

**t:** +(44) 020 7139 5129

**e:** [enquiries@lightingoflondon.co](mailto:enquiries@lightingoflondon.co)


**w:** [www.lightingoflondon.co](http://www.lightingoflondon.co)




The Tilt.M is equipped with a 15° tilt lens, which effectively minimises glare, making it the ideal choice for tasks such as washing, grazing, and profiling. Its versatility allows for use in both indoor and outdoor settings, and it comes with an installation sleeve for added convenience. Furthermore, the resin-filled cable entry and gland provide top-notch protection against water infiltration, ensuring durability and reliability in various conditions.

<b>Material</b>	<i>Aluminium &amp; Stainless Steel 316</i>	<b>Beam Angle</b>	<i>45° with a 15° tilt</i>
<b>Lumen Output</b>	<i>180Lm</i>	<b>Luminous Efficacy</b>	<i>78lm / W</i>
<b>Power</b>	<i>2.3W 3.4V 700mA</i>	<b>IP Rating</b>	<i>67</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Driver Required</b>	<i>Yes</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>DALI Control</b>	<i>Yes (third party driver required)</i>
<b>Size</b>	<i>Ø55mm x 70mm L</i>	<b>Colour Temperature</b>	<i>2700K / 3000K</i>
<b>Cut Out</b>	<i>45mm</i>		

### Light Distribution Curve



### Dimensions

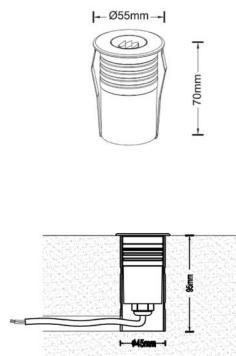

### Lux Distribution Curve

