



Blade.

Product Category: *Low-level / Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Blade is a discreet yet efficient recessed wall-mounted light that is designed to cater to your lighting requirements. The Blade light offers 30° of evenly distributed light, which beautifully highlight and mark its surroundings. This versatile light fixture is perfect for both indoor and outdoor applications, making it an ideal choice for both residential and commercial settings.


The Blade light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.

Material	<i>Aluminium</i>	Beam Angle	<i>30°</i>
Lumen Output	<i>160Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>2.1W 3V 700mA</i>	IP Rating	<i>65</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>2 - 3 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>55mm x 170mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>158mm L x 50mm W x 68mm D</i>		


Light Distribution Curve

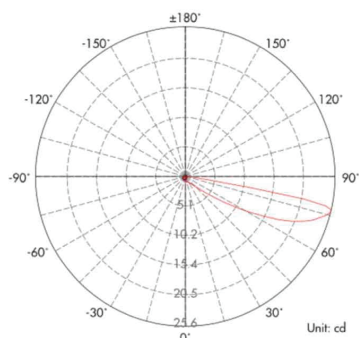

Dimensions

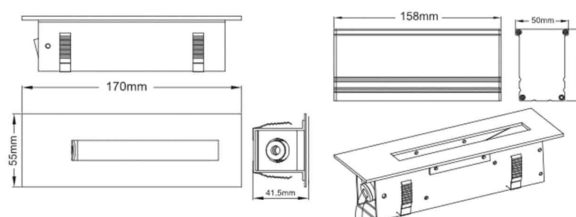

Lux Distribution Curve

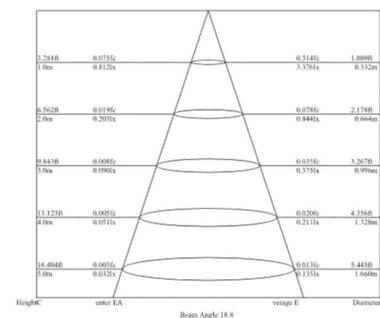



Hide.

Product Category: *Low-level / Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co








The Hide is a discreet yet efficient recessed wall-mounted light that is designed to cater to your lighting requirements. The Hide light offers 50° of evenly distributed light, which beautifully highlight and mark its surroundings. This versatile light fixture is perfect for both indoor and outdoor applications, making it an ideal choice for both residential and commercial settings.

The Hide light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.

Material	<i>Aluminium</i>	Beam Angle	<i>50°</i>
Lumen Output	<i>80Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>1.05W 3V 350mA</i>	IP Rating	<i>65</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>2 - 3 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>55mm x 70mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>45mm W x 60mm H</i>		

Dimensions

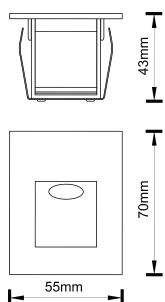



Lunar.

Product Category: *Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co



Lunar is an exquisitely crafted exterior spike light, designed to enhance the aesthetics of your outdoor space, whilst emitting a beautiful diffused light. The 2700K output of light adds a warming ambience to any exterior space.

Available in genuine brushed brass or anodised aluminium, the Lunar boasts a durable and weather-resistant exterior, ensuring longevity and resilience against the elements.

Material	<i>Aluminium / Solid Brass</i>	Luminous Efficacy	<i>75lm / W</i>
Lumen Output	<i>120Lm</i>	IP Rating	<i>65</i>
Power	<i>1.6W 3.2V 500mA</i>	Driver Required	<i>Yes</i>
Dimmable	<i>Yes</i>	Binning	<i>2 - 3 SDCM</i>
CRI	<i>>95</i>	DALI Control	<i>Yes (third party driver required)</i>
Power Factor	<i>>0.98</i>	Colour Temperature	<i>2700K</i>
Size	<i>990mm</i>		
Cut Out	<i>N/A</i>		

Dimensions





Mark.

Product Category: *Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Mark is a compact yet sturdy light fixture that casts a gentle, low-level ground wash effect, making it ideal for illuminating driveways and paths with its wide 100° beam angle. It is versatile, suitable for both indoor and outdoor use, and comes with an installation sleeve for easy setup. Additionally, its resin-filled cable entry and gland offer exceptional protection against water ingress, ensuring long-lasting performance in various weather conditions.

Material	Aluminium & Stainless Steel 316	Beam Angle	100°
Lumen Output	160Lm	Luminous Efficacy	76lm / W
Power	2.1W 3V 700mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	ø60mm x 75mm	Colour Temperature	2700K
Cut Out	40mm		

Light Distribution Curve

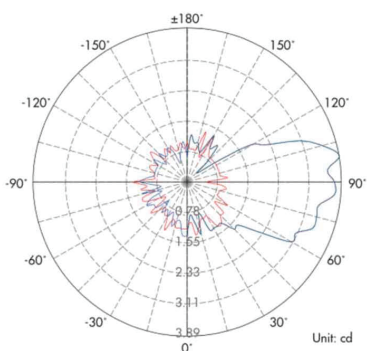

Dimensions

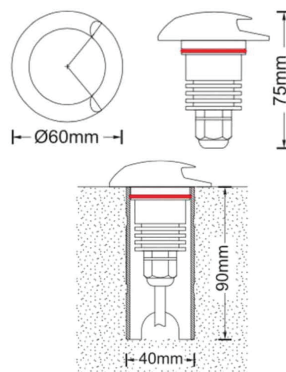

Lux Distribution Curve

Illuminance at a Distance			
	Center Beam LUX		Beam Width
	V	H	
2m	0.30 LUX	9.6m	1.4m
4m	0.07 LUX	19.3m	2.8m
6m	0.03 LUX	28.9m	4.2m
8m	0.02 LUX	38.6m	5.6m
10m	0.01 LUX	48.2m	6.9m
12m	0.01 LUX	57.8m	8.3m
Vert Spread: 135.0H Horiz Spread: 38.3			



Moon.

Product Category: *Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Moon is a discreet spike or surface-mounted light fixture that is suitable for walkways, driveways, garden beds, and borders. This fitting provides full 360° even lighting, which beautifully highlights the surroundings. With its unique color finish, it is virtually invisible in any environment. The Moon is supplied with a surface mount and ground spike, suitable for exterior applications. The cable entry and gland are filled with resin, which provides excellent protection against water damage. For optimal dimming performance, we recommend using our range of PowerBank drivers.

Material	Aluminium & Stainless Steel 316	Beam Angle	100°
Lumen Output	700Lm	Luminous Efficacy	111lm / W
Power	6.3W 18V 350mA	IP Rating	65
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes
Size	Ø150mm x 570mm	Colour Temperature	2700K
Cut Out	N/A		


Light Distribution Curve

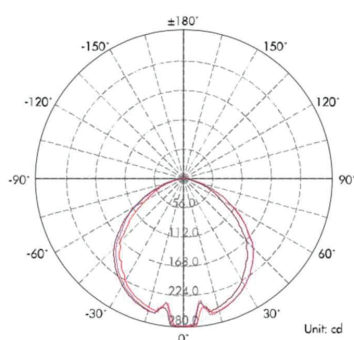

Dimensions

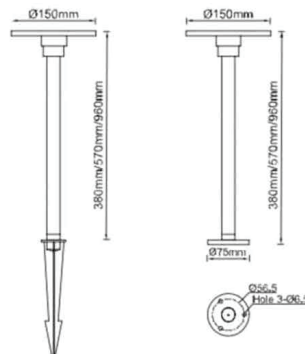

Lux Distribution Curve

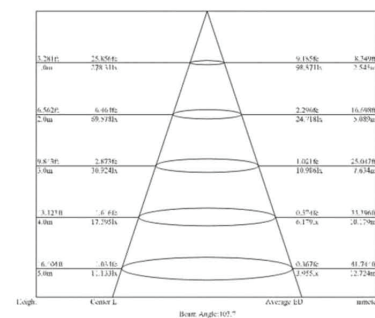



Pin.

Product Category: *Low-level / Exterior*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Pin is a discreet yet efficient recessed wall-mounted light that is designed to cater to your lighting requirements. The Pin light offers 30° of evenly distributed light, which beautifully highlight and mark its surroundings. This versatile light fixture is perfect for both indoor and outdoor applications, making it an ideal choice for both residential and commercial settings.


The Pin light is easy to install and comes with an installation sleeve to ensure that the fixture is securely mounted on any surface.

Material	<i>Aluminium</i>	Beam Angle	<i>30°</i>
Lumen Output	<i>160Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>2.1W 3V 700mA</i>	IP Rating	<i>65</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>2 - 3 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>70mm x 70mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>
Cut Out	<i>Ø 62mm</i>		


Light Distribution Curve



Dimensions

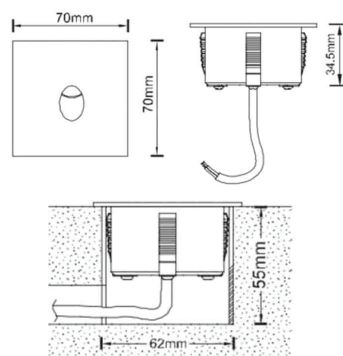

Lux Distribution Curve

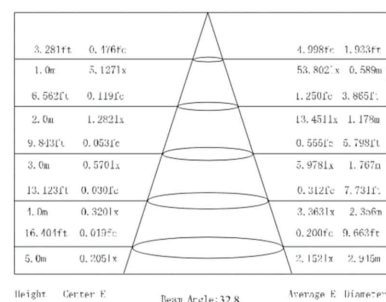



Spot.M

Product Category: *Exterior / Spotlights*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Spot.M is a compact but powerful lighting solution that can be used both indoors and outdoors. The Spot.M provides a beautiful output to illuminate any surface or target. With its unique color finish, it can blend in seamlessly with any environment. For outdoor settings, a ground spike is included for easy positioning, and the resin-filled cable entry and gland provide the ultimate protection against water damage. For smooth dimming, our range of PowerBank drivers can be used with the Spot.M.

Material	Anodised Aluminium	Beam Angle	15° / 36° / 60°
Lumen Output	600Lm	Luminous Efficacy	111lm / W
Power	6.8W 9.7V 700mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	ø44mm x 90mm L	Colour Temperature	2700K
Cut Out	N/A		


Light Distribution Curve



Dimensions

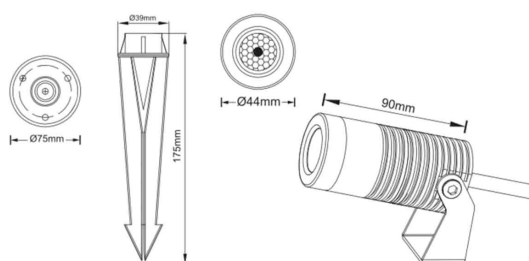

Lux Distribution Curve

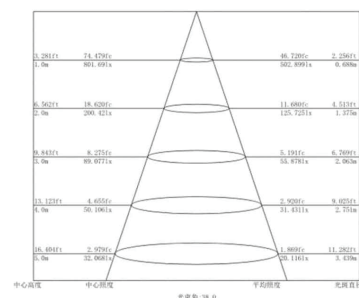



Spot.S

Product Category: *Exterior / Spotlights*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Spot.S is a compact but powerful lighting solution that can be used both indoors and outdoors. The Spot.S provides a beautiful output to illuminate any surface or target. With its unique color finish, it can blend in seamlessly with any environment. For outdoor settings, a ground spike is included for easy positioning, and the resin-filled cable entry and gland provide the ultimate protection against water damage. For smooth dimming, our range of PowerBank drivers can be used with the Spot.S.

Material	<i>Anodised Aluminium</i>	Beam Angle	<i>15° / 30° / 45°</i>
Lumen Output	<i>160Lm</i>	Luminous Efficacy	<i>85lm / W</i>
Power	<i>2.1W 3V 700mA</i>	IP Rating	<i>67</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>2 - 3 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>ø28mm x 39mm</i>	Colour Temperature	<i>2700K</i>
Cut Out	<i>N/A</i>		

Light Distribution Curve

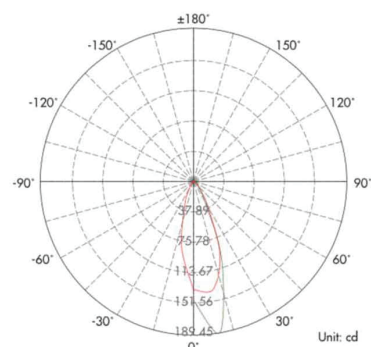

Dimensions

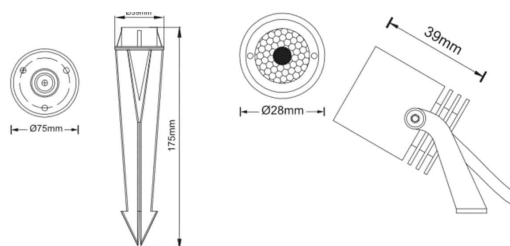

Lux Distribution Curve

Illuminance at a Distance			
	Center Beam LUX	Beam Width	
		V	H
2m	33.42 LUX	1.1m	1.0m
4m	8.35 LUX	2.2m	2.0m
6m	3.71 LUX	3.3m	3.0m
8m	2.09 LUX	4.3m	4.0m
10m	1.34 LUX	5.4m	5.1m
12m	0.93 LUX	6.5m	6.1m

Vert.Spread:30.4

Horiz.Spread:28.4



Spot.Z

Product Category: *Exterior / Spotlights*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Spot.Z provides the ability to pinpoint any surface or target to create the most dramatic designs. The fully zoomable lens provides a beam from 10° to 40°, and with our unique colour finish it's virtually invisible in any environment.

This device can be used both indoors and outdoors, and it comes with a ground spike for external positioning. Additionally, it has a resin-filled cable entry and gland that provides ultimate protection against water ingress. To ensure that it can be smoothly dimmed, our range of PowerBank drivers is available.

Material	Anodised Aluminium	Beam Angle	10 - 40°
Lumen Output	500Lm	Luminous Efficacy	79lm / W
Power	6.3W 9V 700mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	ø52mm x 103mm	Colour Temperature	2700K
Cut Out	N/A		

Light Distribution Curve

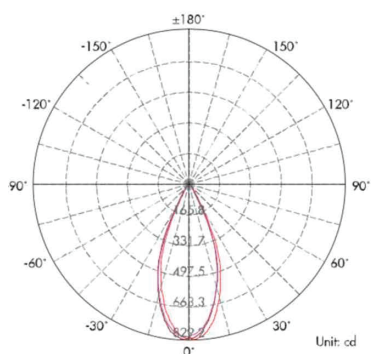



Sqube.M

Product Category: *Exterior / Spotlights*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co



The Sqube.M is where contemporary design meets outdoor illumination. The light output of Sqube creates a warm and inviting atmosphere, ideal for accentuating architectural features, landscaping elements, or creating an ambient glow for outdoor gatherings. Sqube's three different beam angles provides options for a focused and directional illumination, perfect for highlighting specific areas or architectural details in your outdoor space.

Material	<i>Anodised Aluminium</i>	Beam Angle	<i>15° / 36° / 60°</i>
Lumen Output	<i>870Lm</i>	Luminous Efficacy	<i>97lm / W</i>
Power	<i>8.9W 17.9V 500mA</i>	IP Rating	<i>65</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>2 - 3 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>70mm x 70mm x 70mm</i>	Colour Temperature	<i>2700K</i>
Cut Out	<i>N/A</i>		

Dimensions

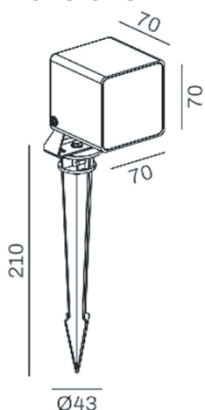

Lux Distribution Curve

h(m)	E(lx)	ø(m)
1	1539	ø0.65
2	384.8	ø1.30
3	171.0	ø1.95
4	96.20	ø2.61
5	61.57	ø3.26



Sqube.S

Product Category: *Exterior / Spotlights*

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co



The Sqube.S is where contemporary design meets outdoor illumination. The light output of Sqube creates a warm and inviting atmosphere, ideal for accentuating architectural features, landscaping elements, or creating an ambient glow for outdoor gatherings. Sqube's three different beam angles provide options for a focused and directional illumination, perfect for highlighting specific areas or architectural details in your outdoor space.

Material	<i>Anodised Aluminium</i>	Beam Angle	<i>15° / 36° / 60°</i>
Lumen Output	<i>445Lm</i>	Luminous Efficacy	<i>75lm / W</i>
Power	<i>5.9W 17V 350mA</i>	IP Rating	<i>65</i>
Dimmable	<i>Yes</i>	Driver Required	<i>Yes</i>
CRI	<i>>95</i>	Binning	<i>2 - 3 SDCM</i>
Power Factor	<i>>0.98</i>	DALI Control	<i>Yes (third party driver required)</i>
Size	<i>50mm x 50mm x 50mm</i>	Colour Temperature	<i>2700K</i>
Cut Out	<i>N/A</i>		

Dimensions

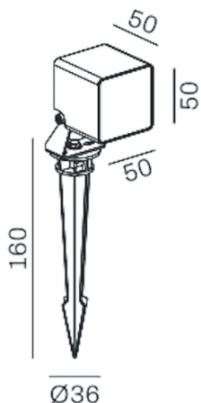

Lux Distribution Curve

h(m)	E(lx)	ø(m)
1	1692	ø0.38
2	423.0	ø0.76
3	188.0	ø1.14
4	105.7	ø1.52
5	67.68	ø1.90