



Bloc.S

Product Category: Downlight / Spotlight

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co






The Bloc.S is part of our Bloc range- a contemporary lighting solution that seamlessly combines functionality and aesthetics to illuminate your space with style.

This sleek and sophisticated fixture is designed to bring a modern touch to any environment, whether it's a residential living space, commercial office, or hospitality venue.

With a choice between a 2700K, 3000K, or 4000K output and a 350° rotation, the Bloc.S is the perfect surface-mounted fitting to create a warm and beautiful ambience.

| | | | |
|---------------------|---------------------------|---------------------------|--|
| Material | Aluminium | Beam Angle | 35° / 50° |
| Lumen Output | 443Lm | Luminous Efficacy | 76lm / W |
| Power | 5.8W 11.66V 500mA | IP Rating | 54 |
| Dimmable | No | Driver Required | <i>Non dimmable driver built-in</i> |
| CRI | >95 | Binning | 2 - 3 SDCM |
| Power Factor | >0.98 | DALI Control | Yes (<i>third party controller required</i>) |
| Size | 45mm x 45mm x 45mm (x 2) | Colour Temperature | 2700K / 3000K / 4000K |
| Cut Out | N/A | | |

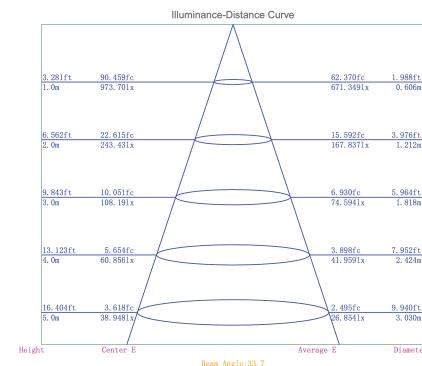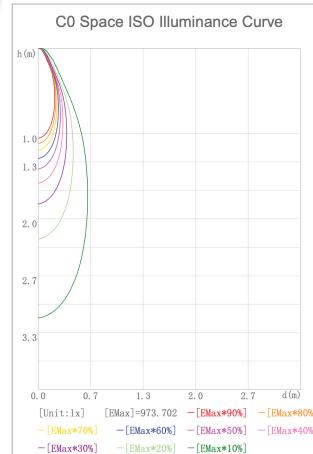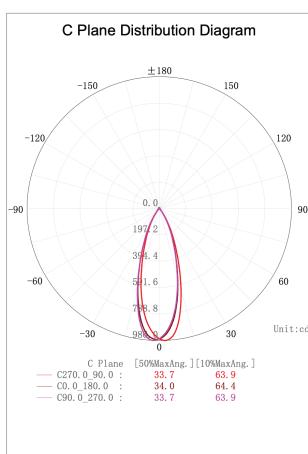



Follow.Me.P

Product Category: Spotlights / Downlights

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The plaster-in FollowMe.P spotlight allows the user almost complete directional control. The adjustable cylindrical fitting can point in a 355° horizontal range, or, if a 90° vertical spotlight is desired, it can recess back into its fitting to sit flush against the ceiling.

With three beam angle options of a sharp 15°, a generous 24° or a wider 36°, one has ample options on how to highlight any wall or object.




Product Categories: Spotlights / Downlights

| | | | |
|---------------------|---------------|---------------------------|-----------------------------------|
| Material | Aluminium | Beam Angle | 15° / 24° / 36° |
| Lumen Output | 600Lm | Luminous Efficacy | 75lm / W |
| Power | 8W 36V 180mA | IP Rating | 21 |
| Dimmable | Yes | Driver Required | TRIAC dimmable driver supplied |
| CRI | >95 | Binning | 1 SDCM |
| Power Factor | >0.98 | DALI Control | Yes (third party driver required) |
| Size | 30mm x 65mm L | Colour Temperature | 2700K / 3000K / 4000K |
| Cut Out | 55mm | | |

Dimensions

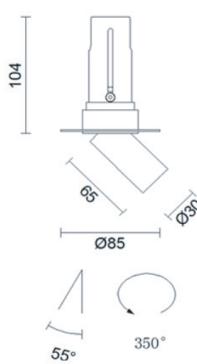

Lux Distribution Curve





Follow.Me.R

SKU: Follow.Me.R

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Follow.Me.R recessed spotlight is highly versatile, offering almost complete directional control to the user. It comes with an adjustable cylindrical fitting that can point in a 355° horizontal range. If a 90° vertical spotlight is needed, it can be recessed back into its fitting to sit flush with the ceiling. The Follow.Me.R is designed to blend seamlessly into its surroundings.

This spotlight comes with three beam angle options- a sharp 15°, a generous 24° or a wider 36°, giving you ample options to highlight any wall or object with a warm 2700k glow.



Product Categories: [Spotlights / Downlights](#)

| | | | |
|---------------------|---------------|---------------------------|--|
| Material | Aluminium | Beam Angle | 15° / 24° / 36° |
| Lumen Output | 600Lm | Luminous Efficacy | 75lm / W |
| Power | 8W 36V 180mA | IP Rating | 21 |
| Dimmable | Yes | Driver Required | <i>TRIAC dimmable driver supplied</i> |
| CRI | >95 | Binning | 1 SDCM |
| Power Factor | >0.98 | DALI Control | Yes (<i>third party driver required</i>) |
| Size | 30mm x 65mm L | Colour Temperature | 2700K / 3000K / 4000K |
| Cut Out | 50mm | | |

Dimensions

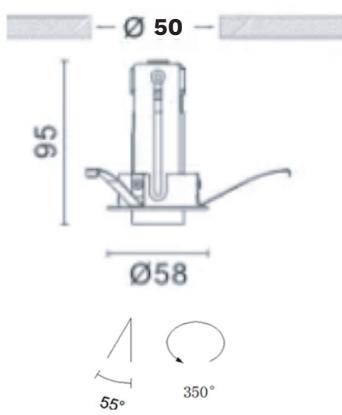

Lux Distribution Curve





Follow.Me.S

SKU: Follow.Me.S

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The S model in the FollowMe range is a ceiling-mounted spotlight combining a fully adjustable 360° horizontal mobility with 90° vertical positioning for accurate lighting of objects. Measuring a maximum of 120mm from the ceiling, the Follow.Me.S is a subtle fitting, yet it provides a beautiful beam of light onto artwork, ornaments or purely to express a welcoming ambience within the room. The fitting comes in an array of beam angles, from a sharp 15° to a spread of 60°.


Product Categories: [Spotlights](#)

| | | | |
|---------------------|--------------|---------------------------|--|
| Material | Aluminium | Beam Angle | 15° / 24° / 36° / 60° |
| Lumen Output | 670Lm | Luminous Efficacy | 83lm / W |
| Power | 8W 25V 200mA | IP Rating | 21 |
| Dimmable | Yes | Driver Required | <i>Dimmable driver built-in</i> |
| CRI | >95 | Binning | 1 SDCM |
| Power Factor | >0.98 | DALI Control | Yes (<i>third party driver required</i>) |
| Size | 55mm x 163mm | Colour Temperature | 2700K / 3000K / 4000K |
| Cut Out | N/A | | |

Dimensions

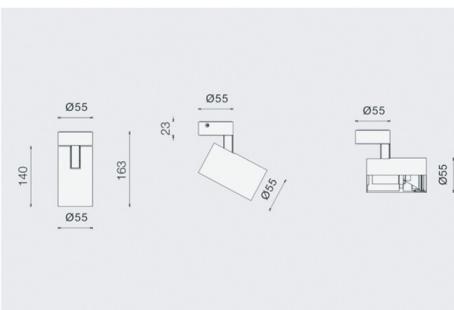

Lux Distribution Curve

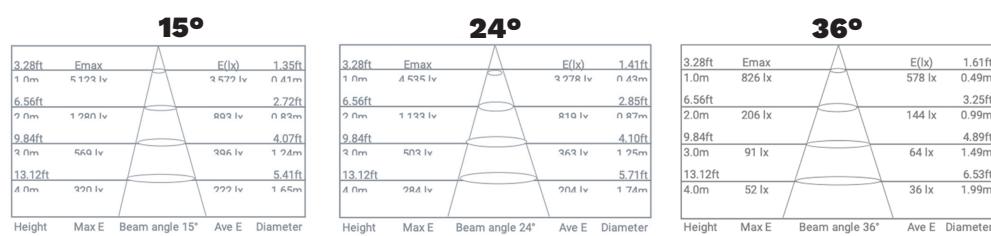

Spot.M

Product Category: Exterior / Spotlights

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Spot.M is a compact but powerful lighting solution that can be used both indoors and outdoors. The Spot.M provides a beautiful output to illuminate any surface or target. With its unique color finish, it can blend in seamlessly with any environment. For outdoor settings, a ground spike is included for easy positioning, and the resin-filled cable entry and gland provide the ultimate protection against water damage. For smooth dimming, our range of PowerBank drivers can be used with the Spot.M.

| | | | |
|---------------------|--------------------|---------------------------|-----------------------------------|
| Material | Anodised Aluminium | Beam Angle | 15° / 36° / 60° |
| Lumen Output | 600Lm | Luminous Efficacy | 111lm / W |
| Power | 6.8W 9.7V 700mA | IP Rating | 67 |
| Dimmable | Yes | Driver Required | Yes |
| CRI | >95 | Binning | 2 - 3 SDCM |
| Power Factor | >0.98 | DALI Control | Yes (third party driver required) |
| Size | ø44mm x 90mm L | Colour Temperature | 2700K |
| Cut Out | N/A | | |


Light Distribution Curve



Dimensions

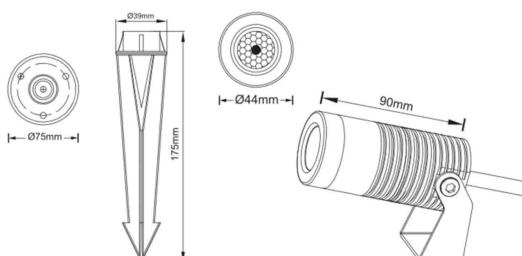

Lux Distribution Curve

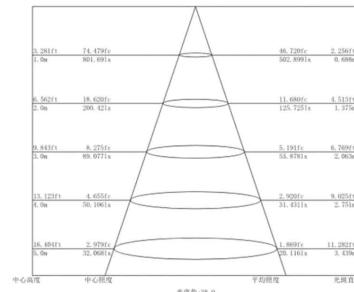



Spot.S

Product Category: Exterior / Spotlights

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Spot.S is a compact but powerful lighting solution that can be used both indoors and outdoors. The Spot.S provides a beautiful output to illuminate any surface or target. With its unique color finish, it can blend in seamlessly with any environment. For outdoor settings, a ground spike is included for easy positioning, and the resin-filled cable entry and gland provide the ultimate protection against water damage. For smooth dimming, our range of PowerBank drivers can be used with the Spot.S.

| | | | |
|---------------------|--------------------|---------------------------|-----------------------------------|
| Material | Anodised Aluminium | Beam Angle | 15° / 30° / 45° |
| Lumen Output | 160Lm | Luminous Efficacy | 85lm / W |
| Power | 2.1W 3V 700mA | IP Rating | 67 |
| Dimmable | Yes | Driver Required | Yes |
| CRI | >95 | Binning | 2 - 3 SDCM |
| Power Factor | >0.98 | DALI Control | Yes (third party driver required) |
| Size | Ø28mm x 39mm | Colour Temperature | 2700K |
| Cut Out | N/A | | |


Light Distribution Curve



Dimensions

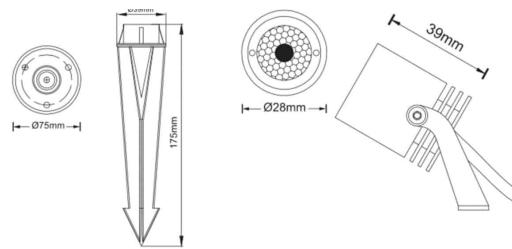

Lux Distribution Curve





Spot.Z

Product Category: Exterior / Spotlights

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co




The Spot.Z provides the ability to pinpoint any surface or target to create the most dramatic designs. The fully zoomable lens provides a beam from 10° to 40°, and with our unique colour finish it's virtually invisible in any environment.


This device can be used both indoors and outdoors, and it comes with a ground spike for external positioning. Additionally, it has a resin-filled cable entry and gland that provides ultimate protection against water ingress. To ensure that it can be smoothly dimmed, our range of PowerBank drivers is available.

| | | | |
|---------------------|--------------------|---------------------------|-----------------------------------|
| Material | Anodised Aluminium | Beam Angle | 10 - 40° |
| Lumen Output | 500Lm | Luminous Efficacy | 79lm / W |
| Power | 6.3W 9V 700mA | IP Rating | 67 |
| Dimmable | Yes | Driver Required | Yes |
| CRI | >95 | Binning | 2 - 3 SDCM |
| Power Factor | >0.98 | DALI Control | Yes (third party driver required) |
| Size | Ø52mm x 103mm | Colour Temperature | 2700K |
| Cut Out | N/A | | |


Light Distribution Curve

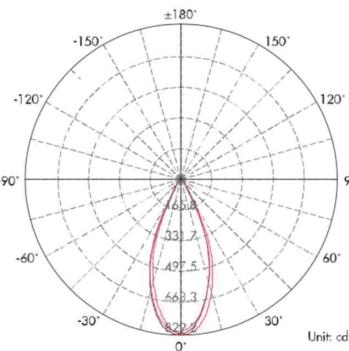

Dimensions

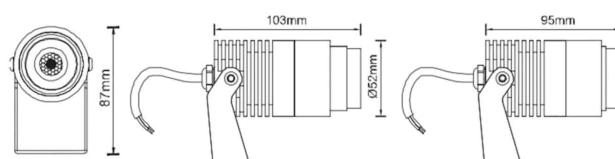

Lux Distribution Curve

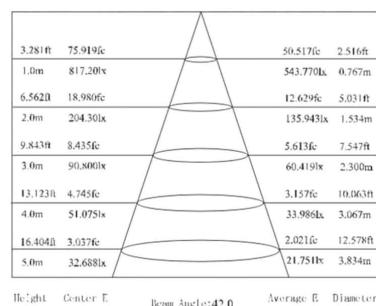



Sqube.M

Product Category: Exterior / Spotlights

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co



The Sqube.M is where contemporary design meets outdoor illumination. The light output of Sqube creates a warm and inviting atmosphere, ideal for accentuating architectural features, landscaping elements, or creating an ambient glow for outdoor gatherings. Sqube's three different beam angles provides options for a focused and directional illumination, perfect for highlighting specific areas or architectural details in your outdoor space.

| | | | |
|---------------------|--------------------|---------------------------|-----------------------------------|
| Material | Anodised Aluminium | Beam Angle | 15° / 36° / 60° |
| Lumen Output | 870Lm | Luminous Efficacy | 97lm / W |
| Power | 8.9W 17.9V 500mA | IP Rating | 65 |
| Dimmable | Yes | Driver Required | Yes |
| CRI | >95 | Binning | 2 - 3 SDCM |
| Power Factor | >0.98 | DALI Control | Yes (third party driver required) |
| Size | 70mm x 70mm x 70mm | Colour Temperature | 2700K |
| Cut Out | N/A | | |

Dimensions

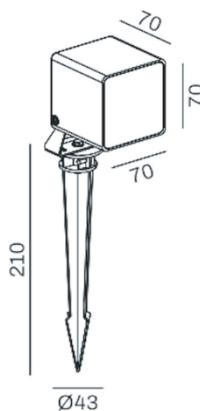

Lux Distribution Curve

| $h(m)$ | $E(lx)$ | $\phi(m)$ |
|--------|---------|-------------|
| 1 | 1539 | $\phi 0.65$ |
| 2 | 384.8 | $\phi 1.30$ |
| 3 | 171.0 | $\phi 1.95$ |
| 4 | 96.20 | $\phi 2.61$ |
| 5 | 61.57 | $\phi 3.26$ |



Sqube.S

Product Category: Exterior / Spotlights

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co



The Sqube.S is where contemporary design meets outdoor illumination. The light output of Sqube creates a warm and inviting atmosphere, ideal for accentuating architectural features, landscaping elements, or creating an ambient glow for outdoor gatherings. Sqube's three different beam angles provide options for a focused and directional illumination, perfect for highlighting specific areas or architectural details in your outdoor space.

| | | | |
|---------------------|--------------------|---------------------------|-----------------------------------|
| Material | Anodised Aluminium | Beam Angle | 15° / 36° / 60° |
| Lumen Output | 445Lm | Luminous Efficacy | 75lm / W |
| Power | 5.9W 17V 350mA | IP Rating | 65 |
| Dimmable | Yes | Driver Required | Yes |
| CRI | >95 | Binning | 2 - 3 SDCM |
| Power Factor | >0.98 | DALI Control | Yes (third party driver required) |
| Size | 50mm x 50mm x 50mm | Colour Temperature | 2700K |
| Cut Out | N/A | | |

Dimensions

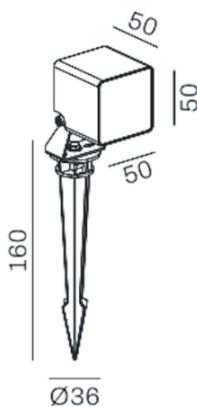

Lux Distribution Curve

| h(m) | E(lx) | ø(m) |
|------|-------|-------|
| 1 | 1692 | ø0.38 |
| 2 | 423.0 | ø0.76 |
| 3 | 188.0 | ø1.14 |
| 4 | 105.7 | ø1.52 |
| 5 | 67.68 | ø1.90 |