



Beam.L

Product Category: Uplights/ Exterior

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Beam.L is a high-quality lighting fixture that is designed to be versatile and discreet. It is perfect for grazing and up-lighting requirements, making it suitable for a variety of applications both indoors and outdoors. Despite its compact size, it delivers a generous output, making it ideal for residential environments. Additionally, it comes with an installation sleeve for easy setup and features resin-filled cable entry and a gland that provides exceptional protection against water ingress.

Material	Aluminium & Stainless Steel 316	Beam Angle	15° / 23° / 36°
Lumen Output	495Lm	Luminous Efficacy	75lm / W
Power	6.6W 19V 350mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	Ø65mm x 69mm L	Colour Temperature	2700K / 3000K
Cut Out	54mm		


Light Distribution Curve



Dimensions

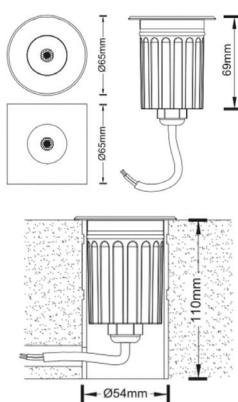

Lux Distribution Curve





Beam.M

Product Category: Uplights/ Exterior



t: +(44) 020 7139 5129


e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co


The Beam.M is a versatile and inconspicuous lighting solution designed to meet your grazing and up-lighting needs. It emits a stunning and precise beam of light, offering you the choice of 15°, 30°, and 45° options, all with a warm colour temperature of 2700K or 3000K. This compact yet powerful light is perfect for illuminating residential environments, both indoors and out. The product includes an installation sleeve for easy setup, and features resin-filled cable entry and gland for top-tier protection against water ingress.

Material	Aluminium & Stainless Steel 316	Beam Angle	15° / 30° / 45°
Lumen Output	495Lm	Luminous Efficacy	78lm / W
Power	2.3W 3.4V 700mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	Ø40mm x 53mm L	Colour Temperature	2700K / 3000K
Cut Out	38mm		


Light Distribution Curve



Dimensions



Lux Distribution Curve

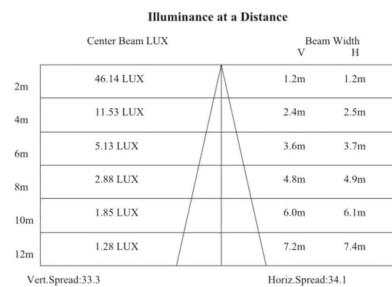



Beam.S

Product Category: Uplights/ Exterior

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Beam.S is a versatile and inconspicuous lighting solution designed to meet a variety of needs, including grazing and up-lighting. This innovative product emits a stunning beam of light, with the flexibility to choose from 15°, 30°, and 45° angles, all while maintaining a beautiful warm output. Whether you require lighting for interior or exterior settings, the Beam.S is up to the task, and it even comes with an installation sleeve for added convenience. Moreover, its resin-filled cable entry and gland ensure the highest level of protection against water ingress, making it a reliable choice for both indoor and outdoor applications.

Material	Aluminium & Stainless Steel 316	Beam Angle	15° / 30° / 45°
Lumen Output	80Lm	Luminous Efficacy	76lm / W
Power	1.05W 3V 350mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	28mm x 46mm L	Colour Temperature	2700K / 3000K
Cut Out	23mm		


Light Distribution Curve



Dimensions

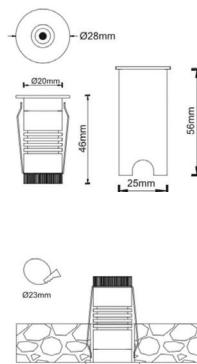

Lux Distribution Curve





Beam.S.Q

Product Category: Uplights/ Exterior



t: +(44) 020 7139 5129


e: enquiries@lightingoflondon.co

w: www.lightingoflondon.co


The Beam.S.Q is a multi-functional and inconspicuous lighting solution ideal for grazing and up-lighting applications, both indoors and outdoors. Its refined design ensures it emits a striking beam of light, offering flexibility with angles of 15°, 30°, and 45°, and a warm colour temperature of 2700K or 3000K. The fixture boasts robust protection from water ingress with its resin-filled cable entry and gland, and comes complete with an installation sleeve for added convenience.

Material	Aluminium & Stainless Steel 316	Beam Angle	15° / 30° / 45°
Lumen Output	80Lm	Luminous Efficacy	76lm / W
Power	1.05W 3V 350mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	28mm x 46mm	Colour Temperature	2700K / 3000K
Cut Out	23mm		


Light Distribution Curve



Dimensions

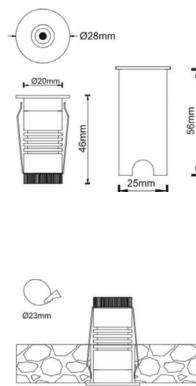

Lux Distribution Curve





Beam.Z

Product Category: Uplights/ Exterior

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The innovative Beam.Z lighting system offers the flexibility to precisely pinpoint or target any surface, allowing for the creation of breathtaking and dramatic designs. With a fully zoomable lens that provides a beam angle ranging from 15° to 50°, this system is designed to meet various lighting needs. Its versatility makes it suitable for both interior and exterior applications. Additionally, the inclusion of an installation sleeve, along with the resin-filled cable entry and gland, ensures comprehensive protection from water ingress.

Material	Aluminium & Stainless Steel 316	Beam Angle	15° - 50°
Lumen Output	590Lm	Luminous Efficacy	88lm / W
Power	6.7W 9.7V 700mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	Ø80mm x 91mm L	Colour Temperature	2700K / 3000K
Cut Out	70mm		


Light Distribution Curve



Dimensions

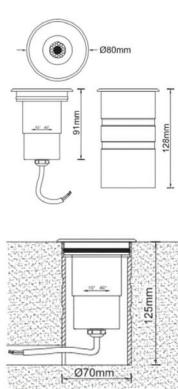

Lux Distribution Curve

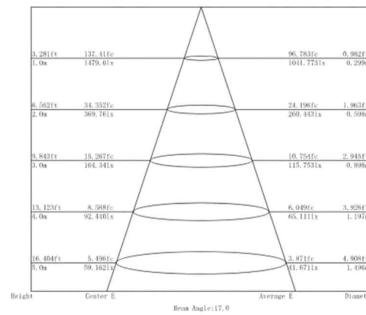



Tilt.L

Product Category: Uplights/ Exterior

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Tilt.L is equipped with a standard 30° tilt lens, which effectively minimises glare, making it perfect for illuminating and enhancing architectural elements through washing, grazing, and profiling. Designed for versatility, it can be used for interior and exterior applications, and it includes an installation sleeve for easy setup. Additionally, the resin-filled cable entry and gland ensure the ultimate protection against water ingress, making it suitable for various environmental conditions.

Material	Aluminium & Stainless Steel 316	Beam Angle	60° with a 30° tilt
Lumen Output	480Lm	Luminous Efficacy	76lm / W
Power	6.7W 9.6V 700mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	Ø78mm x 78mm L	Colour Temperature	2700K / 3000K
Cut Out	66mm		


Light Distribution Curve



Dimensions

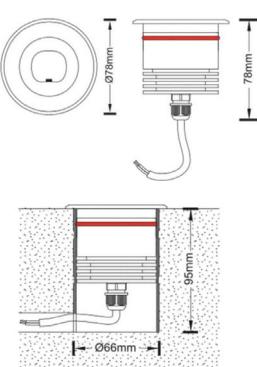

Lux Distribution Curve





Tilt.M

Product Category: Uplights/ Exterior

t: +(44) 020 7139 5129

e: enquiries@lightingoflondon.co


w: www.lightingoflondon.co




The Tilt.M is equipped with a 15° tilt lens, which effectively minimises glare, making it the ideal choice for tasks such as washing, grazing, and profiling. Its versatility allows for use in both indoor and outdoor settings, and it comes with an installation sleeve for added convenience. Furthermore, the resin-filled cable entry and gland provide top-notch protection against water infiltration, ensuring durability and reliability in various conditions.

Material	Aluminium & Stainless Steel 316	Beam Angle	45° with a 15° tilt
Lumen Output	180Lm	Luminous Efficacy	78lm / W
Power	2.3W 3.4V 700mA	IP Rating	67
Dimmable	Yes	Driver Required	Yes
CRI	>95	Binning	2 - 3 SDCM
Power Factor	>0.98	DALI Control	Yes (third party driver required)
Size	Ø55mm x 70mm L	Colour Temperature	2700K / 3000K
Cut Out	45mm		

Light Distribution Curve



Dimensions

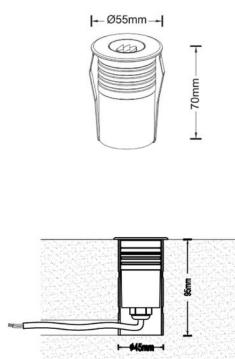

Lux Distribution Curve

