


# POWERBANK250 DALI

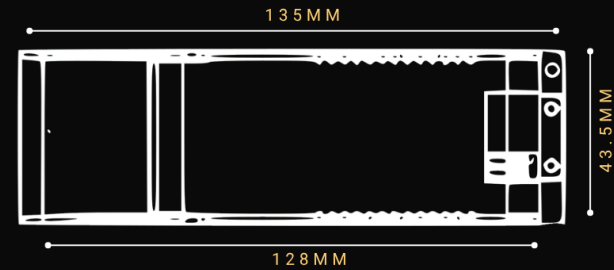

|                            |                   |                                 |  |
|----------------------------|-------------------|---------------------------------|--|
| <b>Output Voltage</b>      | 9 - 42Vdc         | <b>Efficiency</b>               | 85%  |
| <b>Output Current</b>      | 200/250/300/350mA | <b>In-Rush Current</b>          | Cold Start 1.78A                           |
| <b>Output Power</b>        | 1.8W - 14.7W      | <b>Anti-Surge</b>               | L - N: 2kV                                 |
| <b>Strobe Level</b>        | 0%                | <b>Leakage Current</b>          | <0.25mA / 230Vac                           |
| <b>Dimming Range</b>       | 0 - 100%          | <b>Working Temperature</b>      | 45°C - 85°C                                |
| <b>Dimming Interface</b>   | DALI / PUSH DIM   | <b>IP</b>                       | 20   |
| <b>Input Voltage Range</b> | 200 - 250Vac      | <b>Over-Current Protection</b>  | Shut Down >110%<br>(Auto Recovers)         |
| <b>Frequency</b>           | 50/60Hz           | <b>Short Circuit Protection</b> | Shut Down Short Circuit<br>(Auto Recovers) |
| <b>Input Current</b>       | <0.13A            | <b>Over-Heat Protection</b>     | Shut Down >110°C<br>(Auto Recovers)        |