




# POWERBANK350.XL

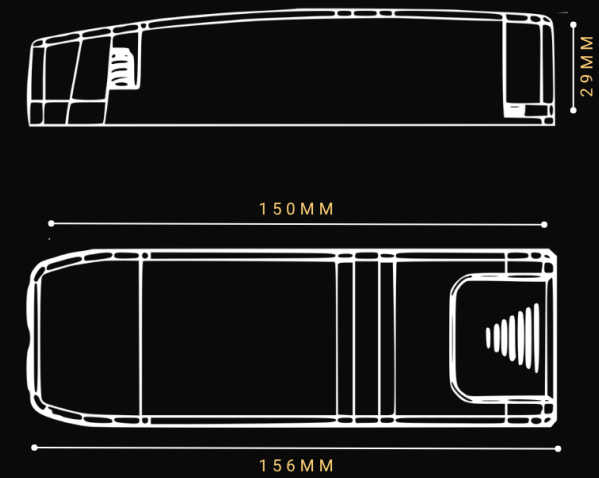

<b>Output Voltage</b>	43 - 70Vdc	<b>Efficiency</b>	85%
<b>Output Current</b>	350mA	<b>In-Rush Current</b>	Cold Start 3.0A
<b>Output Power</b>	15W - 25W	<b>Anti-Surge</b>	L - N: 2kV
<b>Stroke Level</b>	8%	<b>Leakage Current</b>	<0.25mA / 230Vac
<b>Dimming Range</b>	2 - 100%	<b>Working Temperature</b>	45°C - 85°C
<b>Dimming Interface</b>	TRIAC Leading / Trailing Edge	<b>IP</b>	20
<b>Input Voltage Range</b>	200 - 250Vac	<b>Over-Current Protection</b>	Shut Down >102% (Auto Recovers)
<b>Frequency</b>	50/60Hz	<b>Short Circuit Protection</b>	Shut Down Short Circuit (Auto Recovers)
<b>Input Current</b>	<0.29A	<b>Over-Heat Protection</b>	Shut Down >110°C (Auto Recovers)