




Model: PowerBank700.L
 PRI: 200-250V~ 50/60Hz 0.29A
 SEC: 25 - 42VDC 700mA±1%
 Max. output: 45Vdc
 Max.: 29.4W
 Max.: -20...+45°C tc=85°C
 Certificate No.: SAA191744EA
 Dimmable with Leading edge or Trailing edge dimmer
 Constant Current Dimming LED Driver
 CE
 RoHS
 SELV
 Made in China

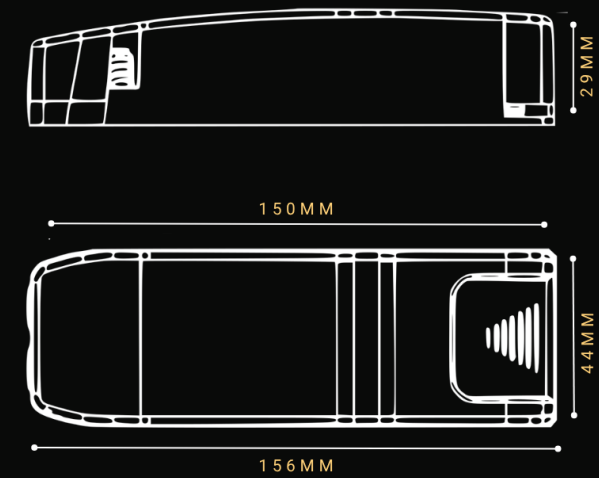

Output Voltage	25 - 42Vdc	Efficiency	85%
Output Current	700mA	In-Rush Current	Cold Start 3.0A
Output Power	17.5W - 29.2W	Anti-Surge	L - N: 1.5kV
Stroke Level	8%	Leakage Current	<0.25mA / 230Vac
Dimming Range	2 - 100%	Working Temperature	45°C - 85°C
Dimming Interface	TRIAC Leading / Trailing Edge	IP	20
Input Voltage Range	200 - 250Vac	Over-Current Protection	Shut Down >102% (Auto Recovers)
Frequency	50/60Hz	Short Circuit Protection	Shut Down Short Circuit (Auto Recovers)
Input Current	<0.15A	Over-Heat Protection	Shut Down >110°C (Auto Recovers)

POWERBANK700.L