


Constant Current Dimming LED Driver
 Model: PowerBank700.M
 PRI: 200-250V~ 50/60Hz 0.102A
 SEC: 12-24VDC 700mA ±1%
 Max. output: 33Vdc
 MAX.: 16.8W
 PF: 0.9 ta=-20...+45°C tc=85°C
 Dimmable with Leading edge or Trailing edge dimmer
 Certificate No.: SAA190297EA
 SELV
 TDV 300
 RoHS
 Made in China
 CE
 200-250V-
 PRI
 0.1A, 1.0mm

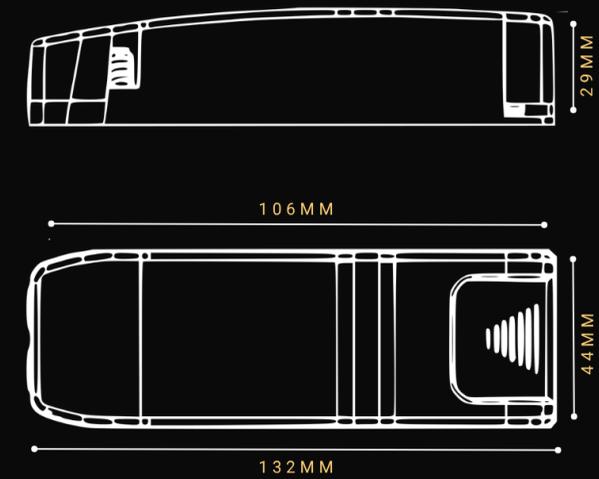

POWERBANK700.M

Output Voltage	12 - 24Vdc	Efficiency	85%
Output Current	700mA	In-Rush Current	Cold Start 2.04A
Output Power	8.5W - 16.8W	Anti-Surge	L - N: 1.5kV
Stroke Level	8%	Leakage Current	<0.25mA / 230Vac
Dimming Range	2 - 100%	Working Temperature	45°C - 85°C
Dimming Interface	TRIAC Leading / Trailing Edge	IP	20
Input Voltage Range	200 - 250Vac	Over-Current Protection	Shut Down >102% (Auto Recovers)
Frequency	50/60Hz	Short Circuit Protection	Shut Down Short Circuit (Auto Recovers)
Input Current	<0.102A	Over-Heat Protection	Shut Down >110°C (Auto Recovers)