



<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>15° / 24° / 36° / 60°</i>
<b>Lumen Output</b>	<i>710Lm</i>	<b>Luminous Efficacy</b>	<i>81lm / W</i>
<b>Power</b>	<i>8.75W 36V 250mA</i>	<b>IP Rating</b>	<i>54</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Fire Rating</b>	<i>60min</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>68.5mm x 58mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>62mm</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>


**AIM.70**

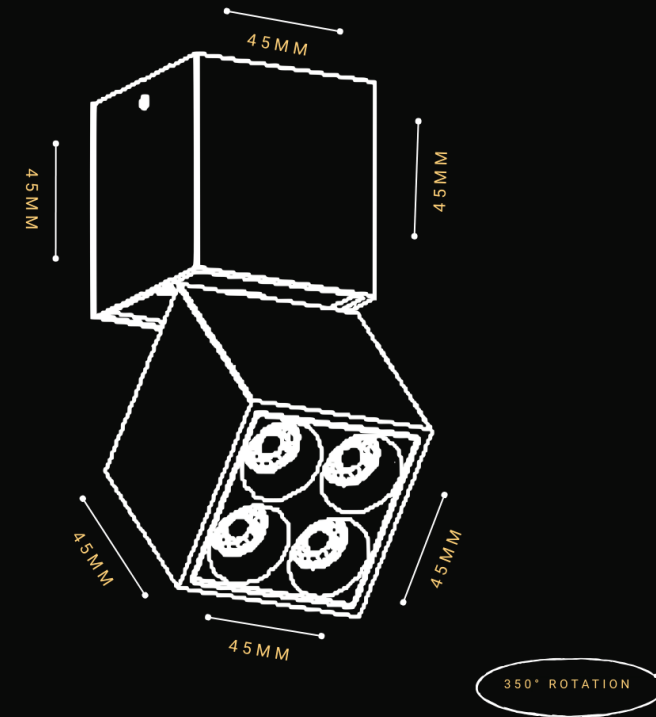


<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>35° / 50°</i>
<b>Lumen Output</b>	<i>443Lm</i>	<b>Luminous Efficacy</b>	<i>76lm / W</i>
<b>Power</b>	<i>5.8W 11.66V 500mA</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>No</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Built-In Non-Dimmable Driver</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>45mm x 45mm x 45mm</i>	<b>DALI Control</b>	<i>Yes (Through Third-Party Controller)</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

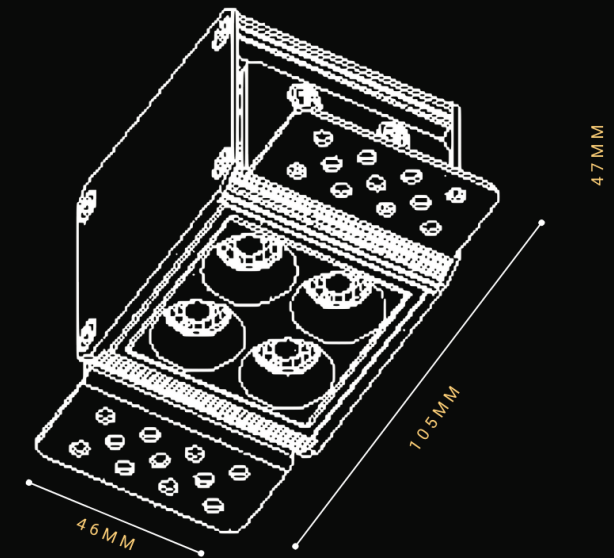


<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>35° / 50°</i>
<b>Lumen Output</b>	<i>443Lm</i>	<b>Luminous Efficacy</b>	<i>76lm / W</i>
<b>Power</b>	<i>5.8W 11.66V 500mA</i>	<b>IP Rating</b>	<i>54</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Fire Rating</b>	<i>60min</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Non-Dimmable Driver Supplied (Dimmable with Powerbank500.M)</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>46mm x 105mm x 47mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>70mm x 55mm</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

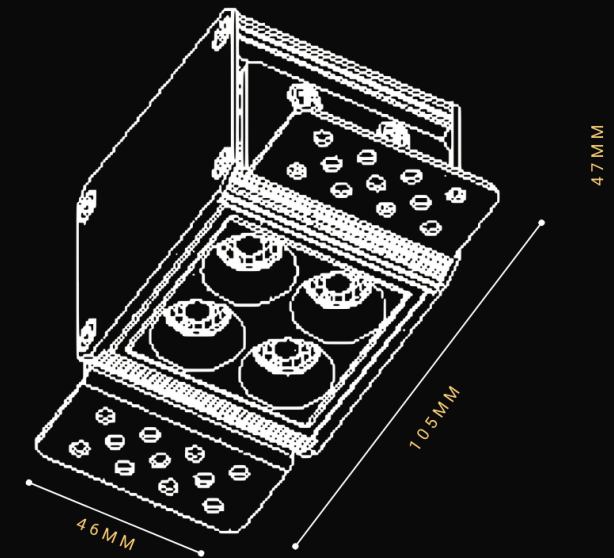



<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>35° / 50°</i>
<b>Lumen Output</b>	<i>443Lm</i>	<b>Luminous Efficacy</b>	<i>76lm / W</i>
<b>Power</b>	<i>5.8W 11.66V 500mA</i>	<b>IP Rating</b>	<i>54</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Fire Rating</b>	<i>60min</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Non-Dimmable Driver Supplied (Dimmable with Powerbank500.M)</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>64mm x 64mm x 63mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>55mm x 55mm</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

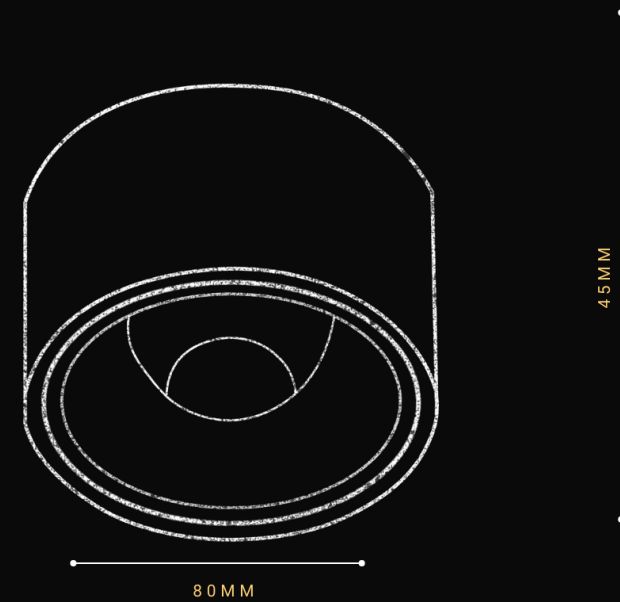


<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>35°</i>
<b>Lumen Output</b>	<i>865 Lm</i>	<b>Luminous Efficacy</b>	<i>78lm / W</i>
<b>Power</b>	<i>11W</i>	<b>IP Rating</b>	<i>54</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Built-In Dimmable Driver</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>80mm x 45mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

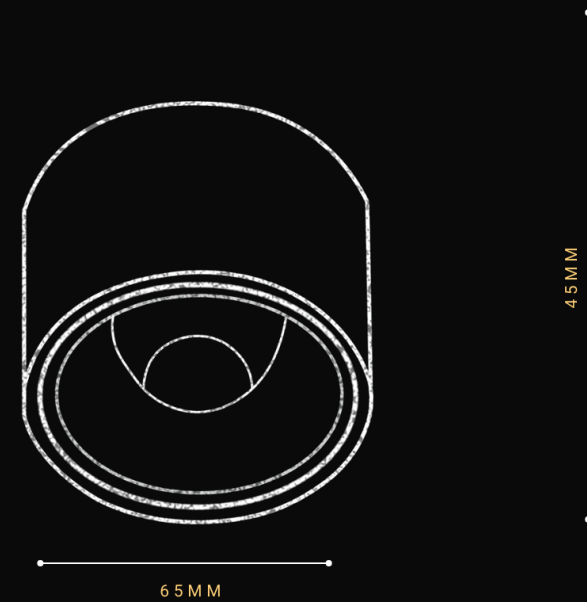

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>35°</i>
<b>Lumen Output</b>	<i>430Lm</i>	<b>Luminous Efficacy</b>	<i>78lm / W</i>
<b>Power</b>	<i>5.5W</i>	<b>IP Rating</b>	<i>54</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Built-In Dimmable Driver</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>65mm x 45mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

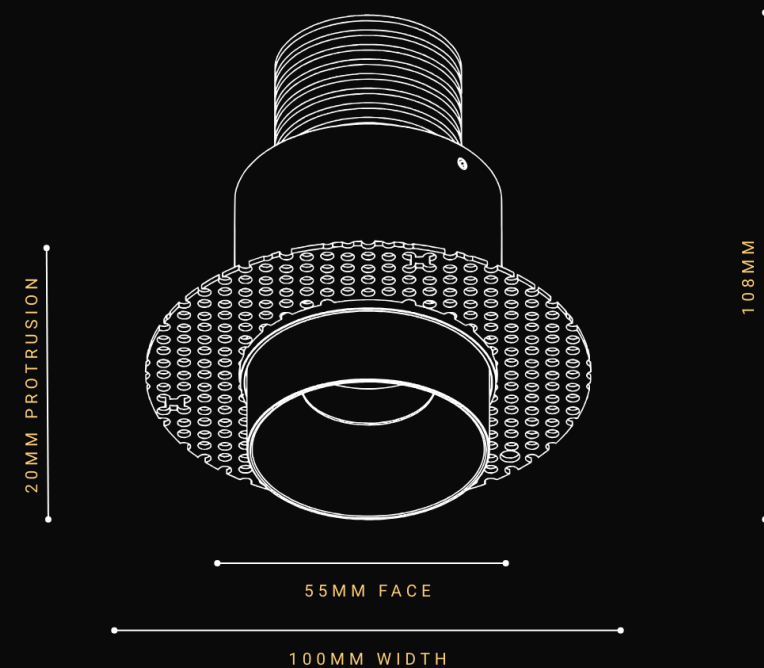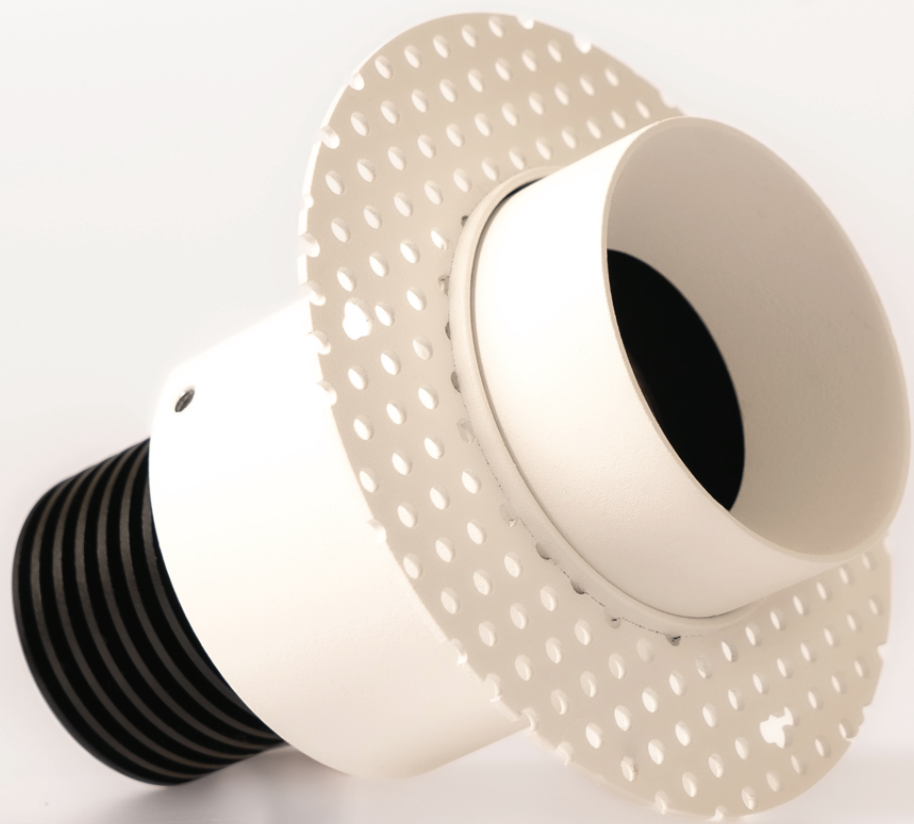


<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>24° / 36° / 60°</i>
<b>Lumen Output</b>	<i>870Lm</i>	<b>Luminous Efficacy</b>	<i>87lm / W</i>
<b>Power</b>	<i>10W 36V 250mA</i>	<b>IP Rating</b>	<i>54</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Fire Rating</b>	<i>60min</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>106mm x 55mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>65mm</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

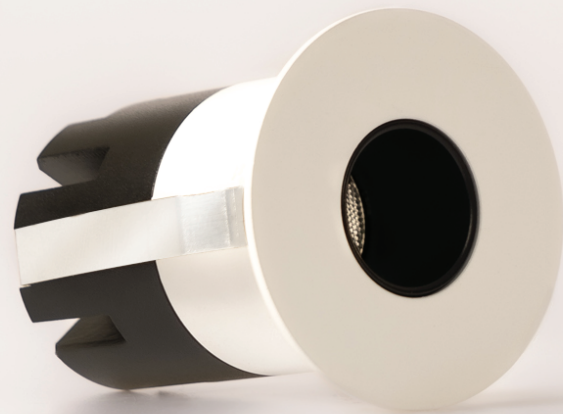


# PROFILE 40




<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>15° / 24° / 36°</i>
<b>Lumen Output</b>	<i>160Lm</i>	<b>Luminous Efficacy</b>	<i>76lm / W</i>
<b>Power</b>	<i>2.1W 3V 700mA</i>	<b>IP Rating</b>	<i>54</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Fire Rating</b>	<i>60min</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>40mm x 49mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>35mm</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

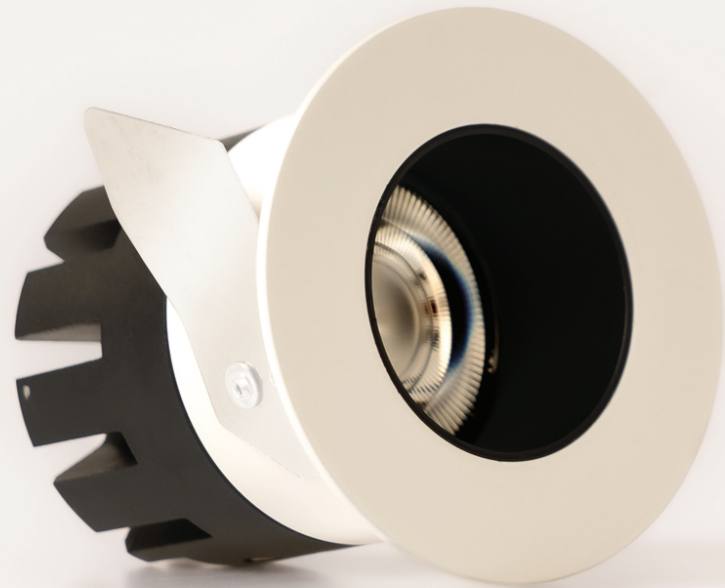

# PROFILE 60

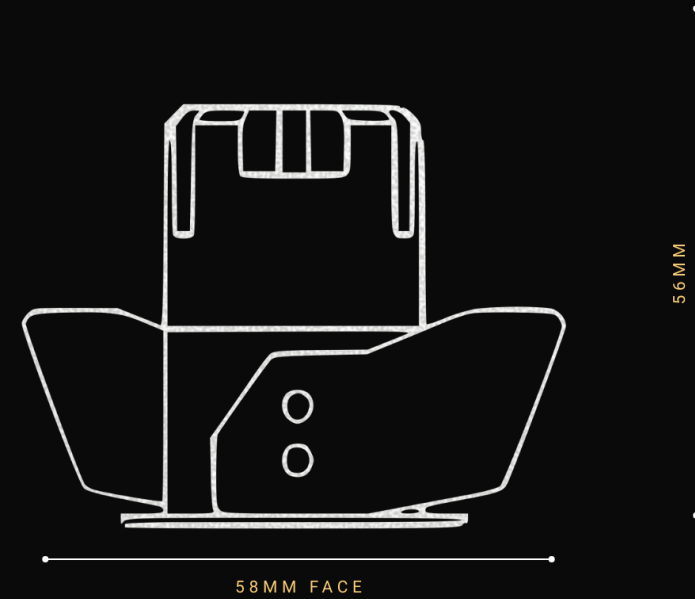

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>24° / 36°</i>
<b>Lumen Output</b>	<i>710Lm</i>	<b>Luminous Efficacy</b>	<i>81lm / W</i>
<b>Power</b>	<i>8.75W 36V 250mA</i>	<b>IP Rating</b>	<i>54</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Fire Rating</b>	<i>60min</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>58mm x 56mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>50mm</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

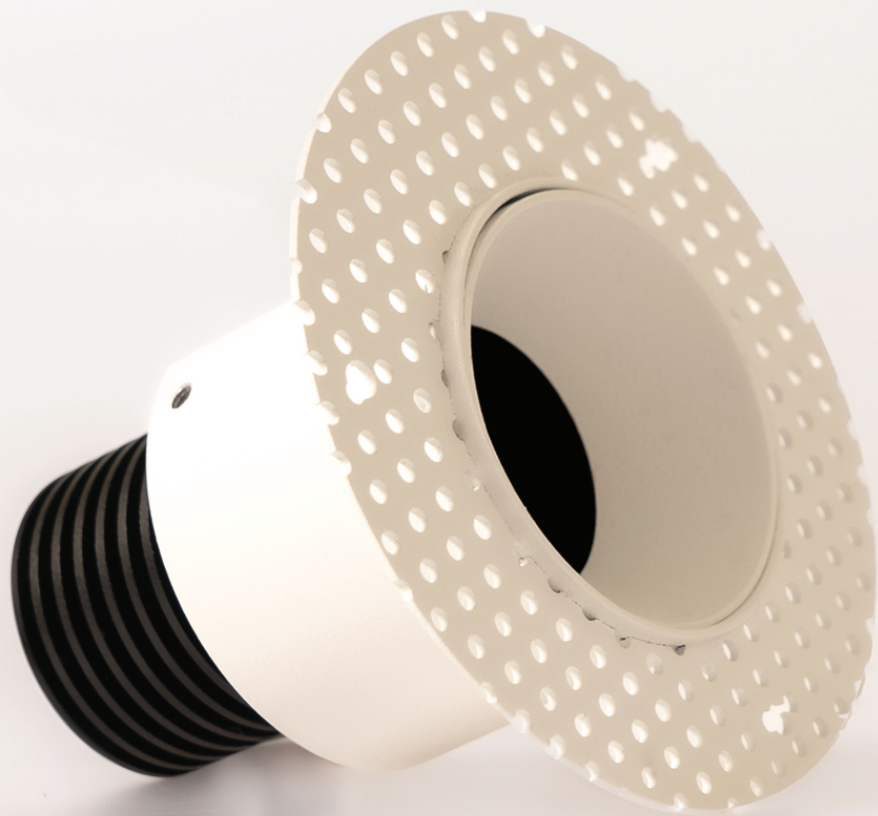

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>24° / 36° / 60°</i>
<b>Lumen Output</b>	<i>870Lm</i>	<b>Luminous Efficacy</b>	<i>87lm / W</i>
<b>Power</b>	<i>10W 36V 250mA</i>	<b>IP Rating</b>	<i>54</i>
<b>Dimmable</b>	<i>Yes</i>	<b>Fire Rating</b>	<i>60min</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>66mm x 66mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>65mm</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>