



Material	<i>Aluminium & Stainless Steel</i>	Beam Angle	<i>15° / 36° / 60°</i>
Lumen Output	<i>495Lm</i>	Luminous Efficacy	<i>75lm / W</i>
Power	<i>6.6W 19V 350mA</i>	IP Rating	<i>67</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>65mm x 69mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>54mm</i>	Colour Temperature	<i>2700K / 3000K</i>




Material	<i>Aluminium & Stainless Steel</i>	Beam Angle	<i>15° / 30° / 45°</i>
Lumen Output	<i>180Lm</i>	Luminous Efficacy	<i>78lm / W</i>
Power	<i>2.3W 3.4V 700mA</i>	IP Rating	<i>67</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>40mm x 53mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>38mm</i>	Colour Temperature	<i>2700K / 3000K</i>

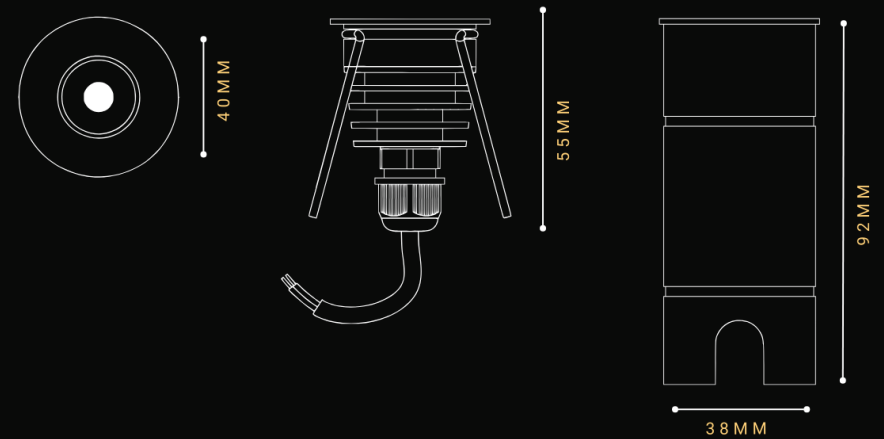


Material	<i>Aluminium & Stainless Steel</i>	Beam Angle	<i>15° / 30° / 45°</i>
Lumen Output	<i>80Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>1.05W 3V 350mA</i>	IP Rating	<i>67</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>28mm x 46mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>23mm</i>	Colour Temperature	<i>2700K / 3000K</i>

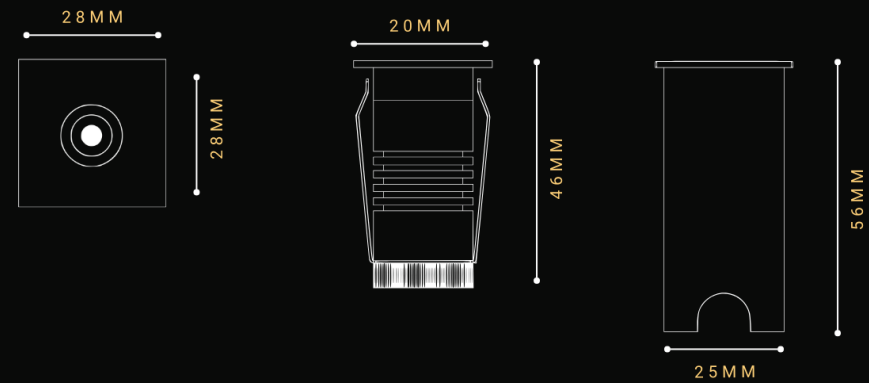

Material	<i>Aluminium & Stainless Steel</i>	Beam Angle	<i>15° / 30° / 45°</i>
Lumen Output	<i>80Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>1.05W 3V 350mA</i>	IP Rating	<i>67</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>28mm x 46mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>23mm</i>	Colour Temperature	<i>2700K / 3000K</i>

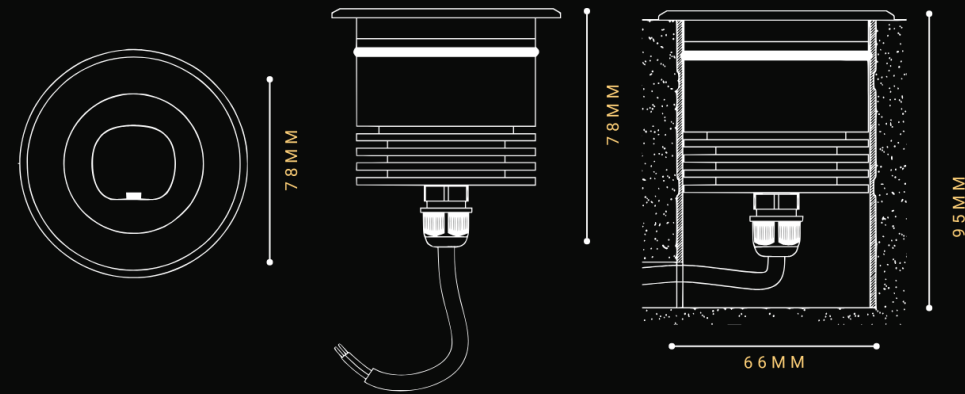

Material	<i>Aluminium & Stainless Steel</i>	Beam Angle	<i>30°@ 60° Tilt</i>
Lumen Output	<i>510Lm</i>	Luminous Efficacy	<i>76lm / W</i>
Power	<i>6.7W 9.6V 700mA</i>	IP Rating	<i>67</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>78mm x 78mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>66mm</i>	Colour Temperature	<i>2700K / 3000K</i>

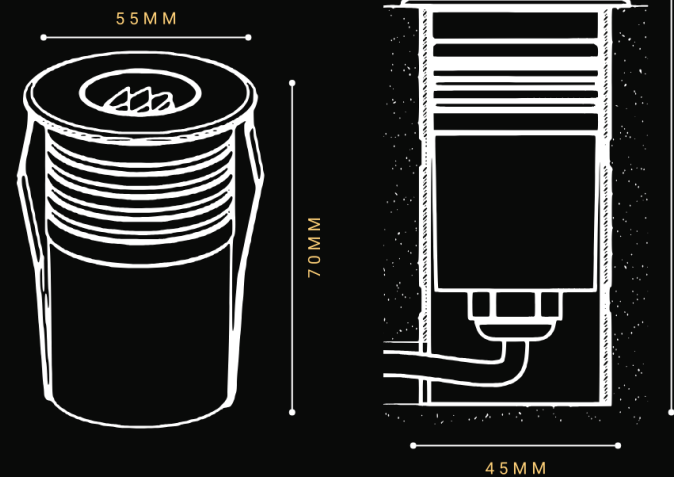

Material	<i>Aluminium & Stainless Steel</i>	Beam Angle	<i>15°@ 30° Tilt</i>
Lumen Output	<i>180Lm</i>	Luminous Efficacy	<i>78lm / W</i>
Power	<i>2.3W 3.4V 700mA</i>	IP Rating	<i>67</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>55mm x 70mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>45mm</i>	Colour Temperature	<i>2700K / 3000K</i>