

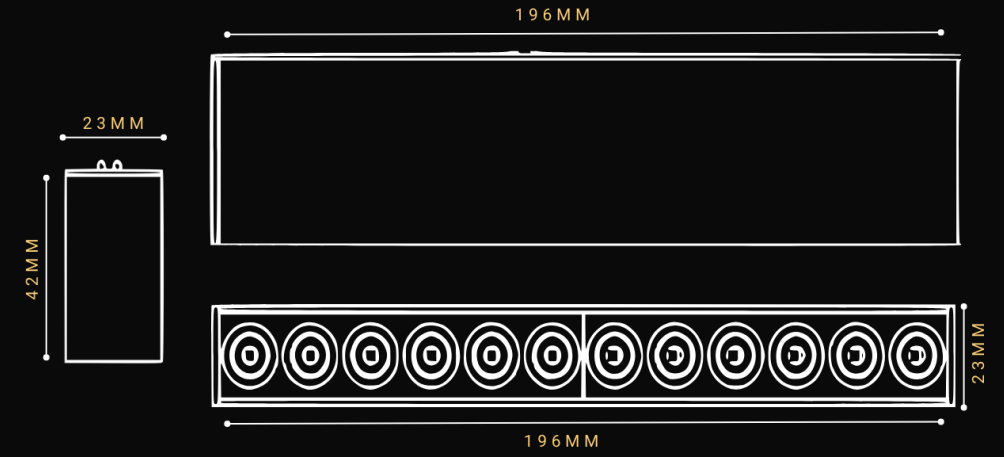


<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>20° / 34° / 48°</i>
<b>Lumen Output</b>	<i>510Lm</i>	<b>Luminous Efficacy</b>	<i>85lm / W</i>
<b>Power</b>	<i>6W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>100mm</i>	<b>DALI Control</b>	<i>No</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

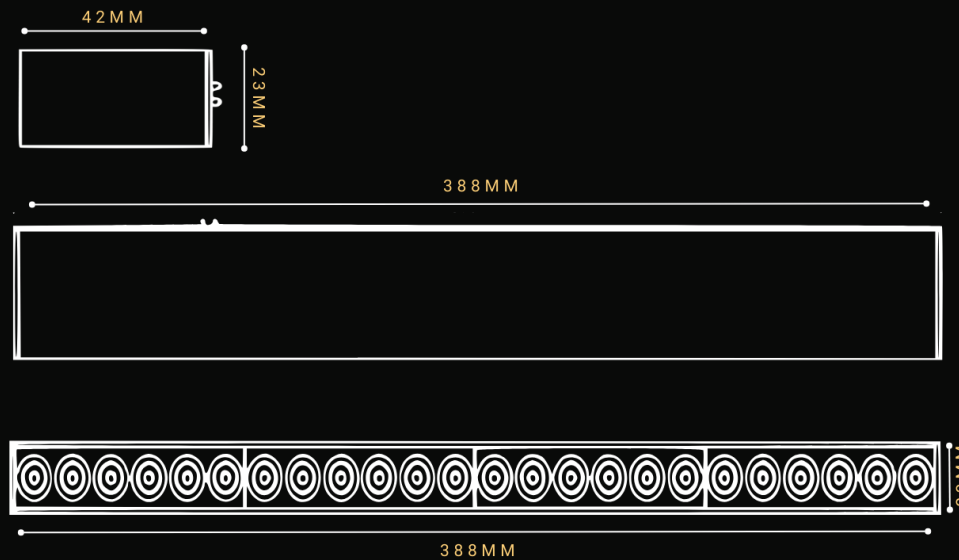

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>20° / 34° / 48°</i>
<b>Lumen Output</b>	<i>1020Lm</i>	<b>Luminous Efficacy</b>	<i>85lm / W</i>
<b>Power</b>	<i>12W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>196mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

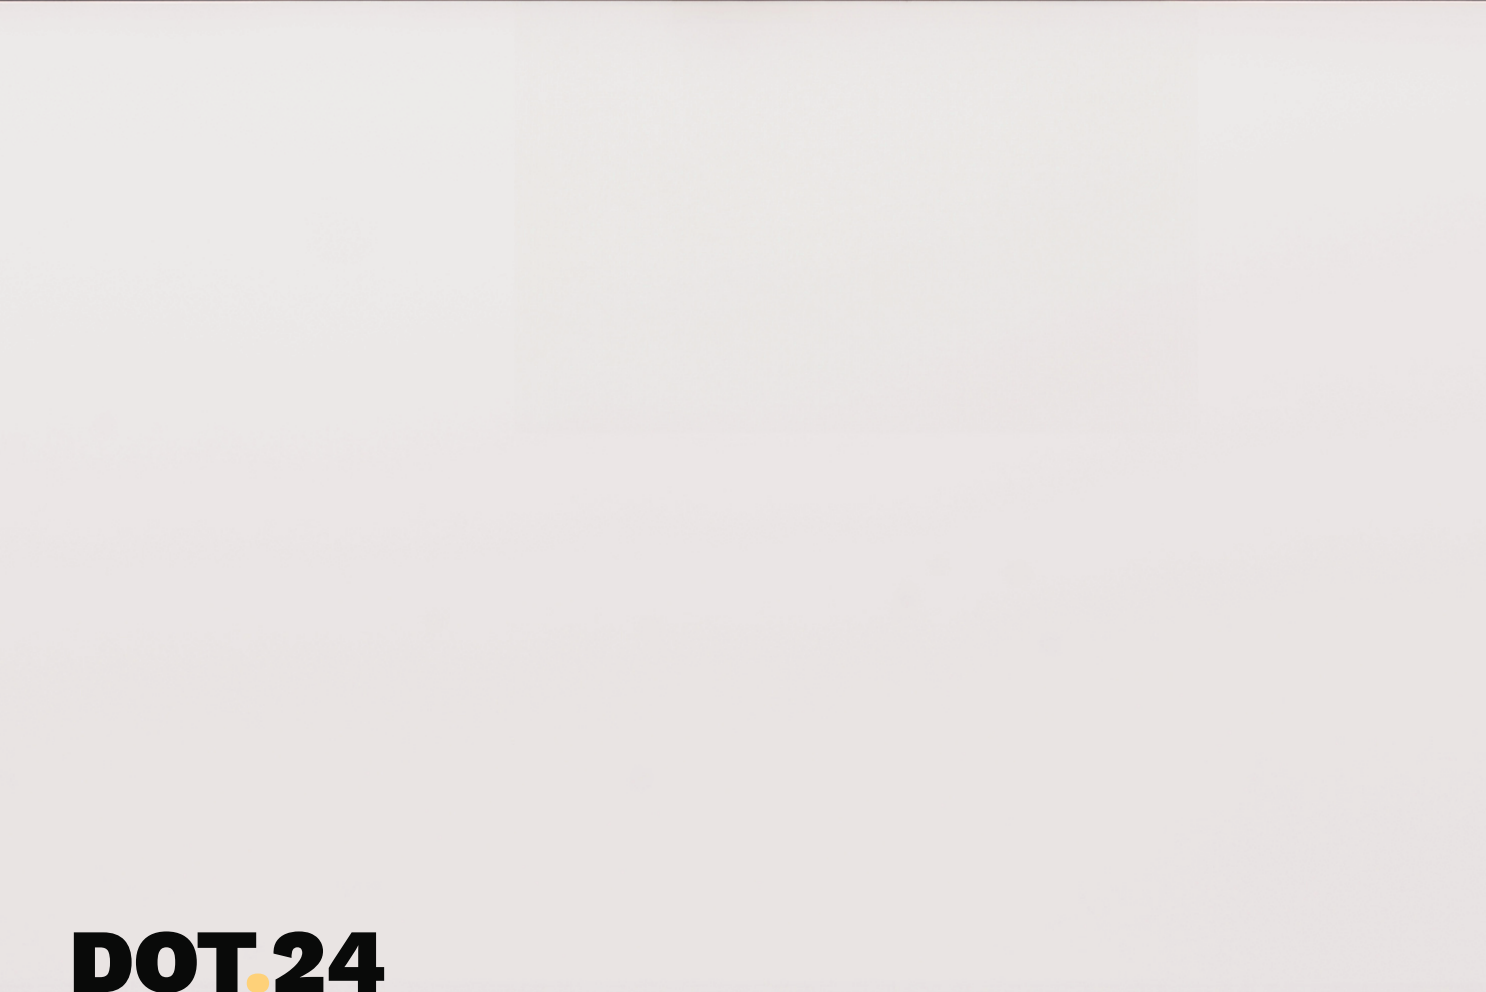

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>20° / 34° / 48°</i>
<b>Lumen Output</b>	<i>1020Lm</i>	<b>Luminous Efficacy</b>	<i>78lm / W</i>
<b>Power</b>	<i>24W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>388mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>



**DRIVER BOX.**

*Driver box.R/S comes with a 150w TRIAC/0-10v driver built-in.*

*Driver box.R/S.DALI comes with a 150w driver built-in.*


*Driver Box.RE/SE contains no driver and therefore is an empty unit.  
No driver can be retro fitted inside, this is for decorative purposes only.*

*A driver box can only be placed at the end of a track system.*

**Driver Box Dimensions:** L450mm x W27.5mm x H58mm



**FOCUS.35**

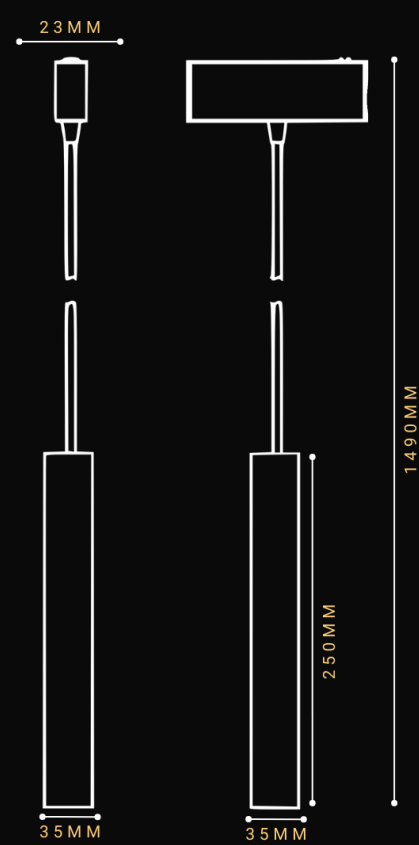

**Material** *Aluminium*

**Lumen Output** *530Lm*

**Power** *5W 24V*

**Dimmable** *N/A*

**CRI** *>95*

**Power Factor** *>0.98*

**Size** *35mm x 250mm*

**Cut Out** *N/A*

**Beam Angle** *20° / 30° / 40°*

**Luminous Efficacy** *106lm / W*

**IP Rating** *21*


**Fire Rating** *N/A*

**Driver Required** *Yes*



**Binning** *2 - 3 SDCM*

**DALI Control** *Yes*

**Colour Temperature** *2700K / 3000K / 4000K*

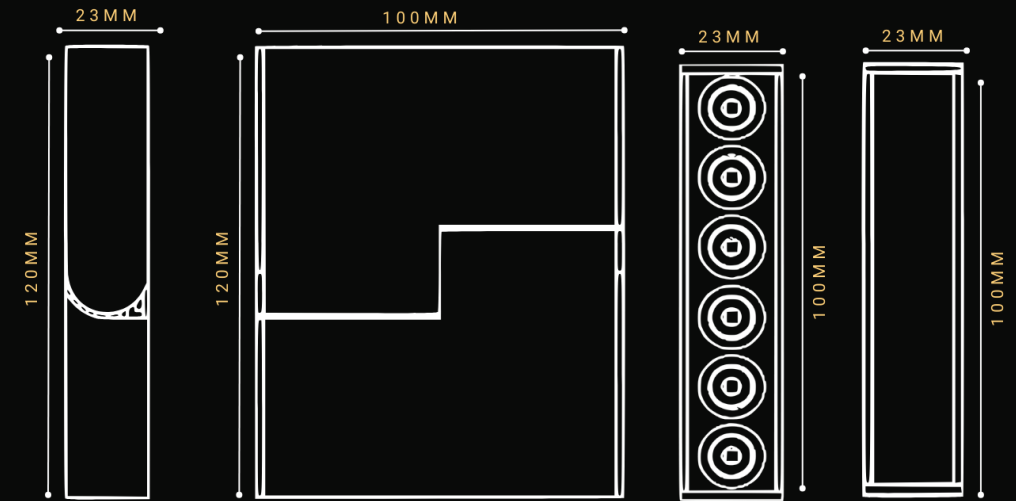

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>20° / 34° / 48°</i>
<b>Lumen Output</b>	<i>685Lm</i>	<b>Luminous Efficacy</b>	<i>85lm / W</i>
<b>Power</b>	<i>8W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>100mm x 120mm</i>	<b>DALI Control</b>	<i>No</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

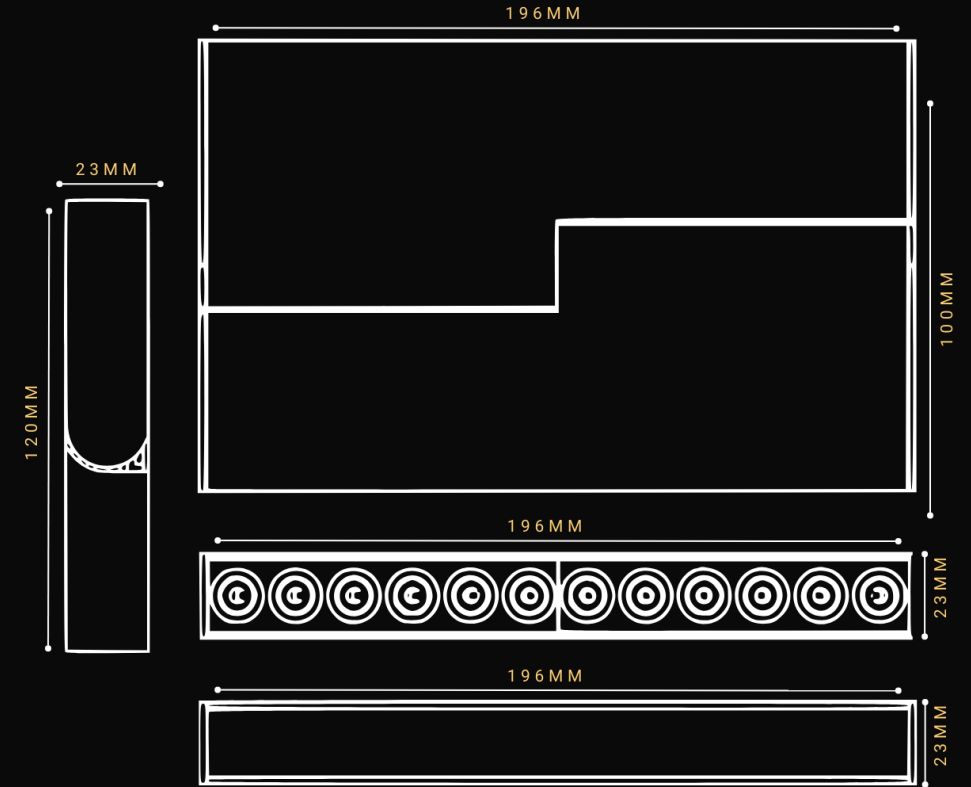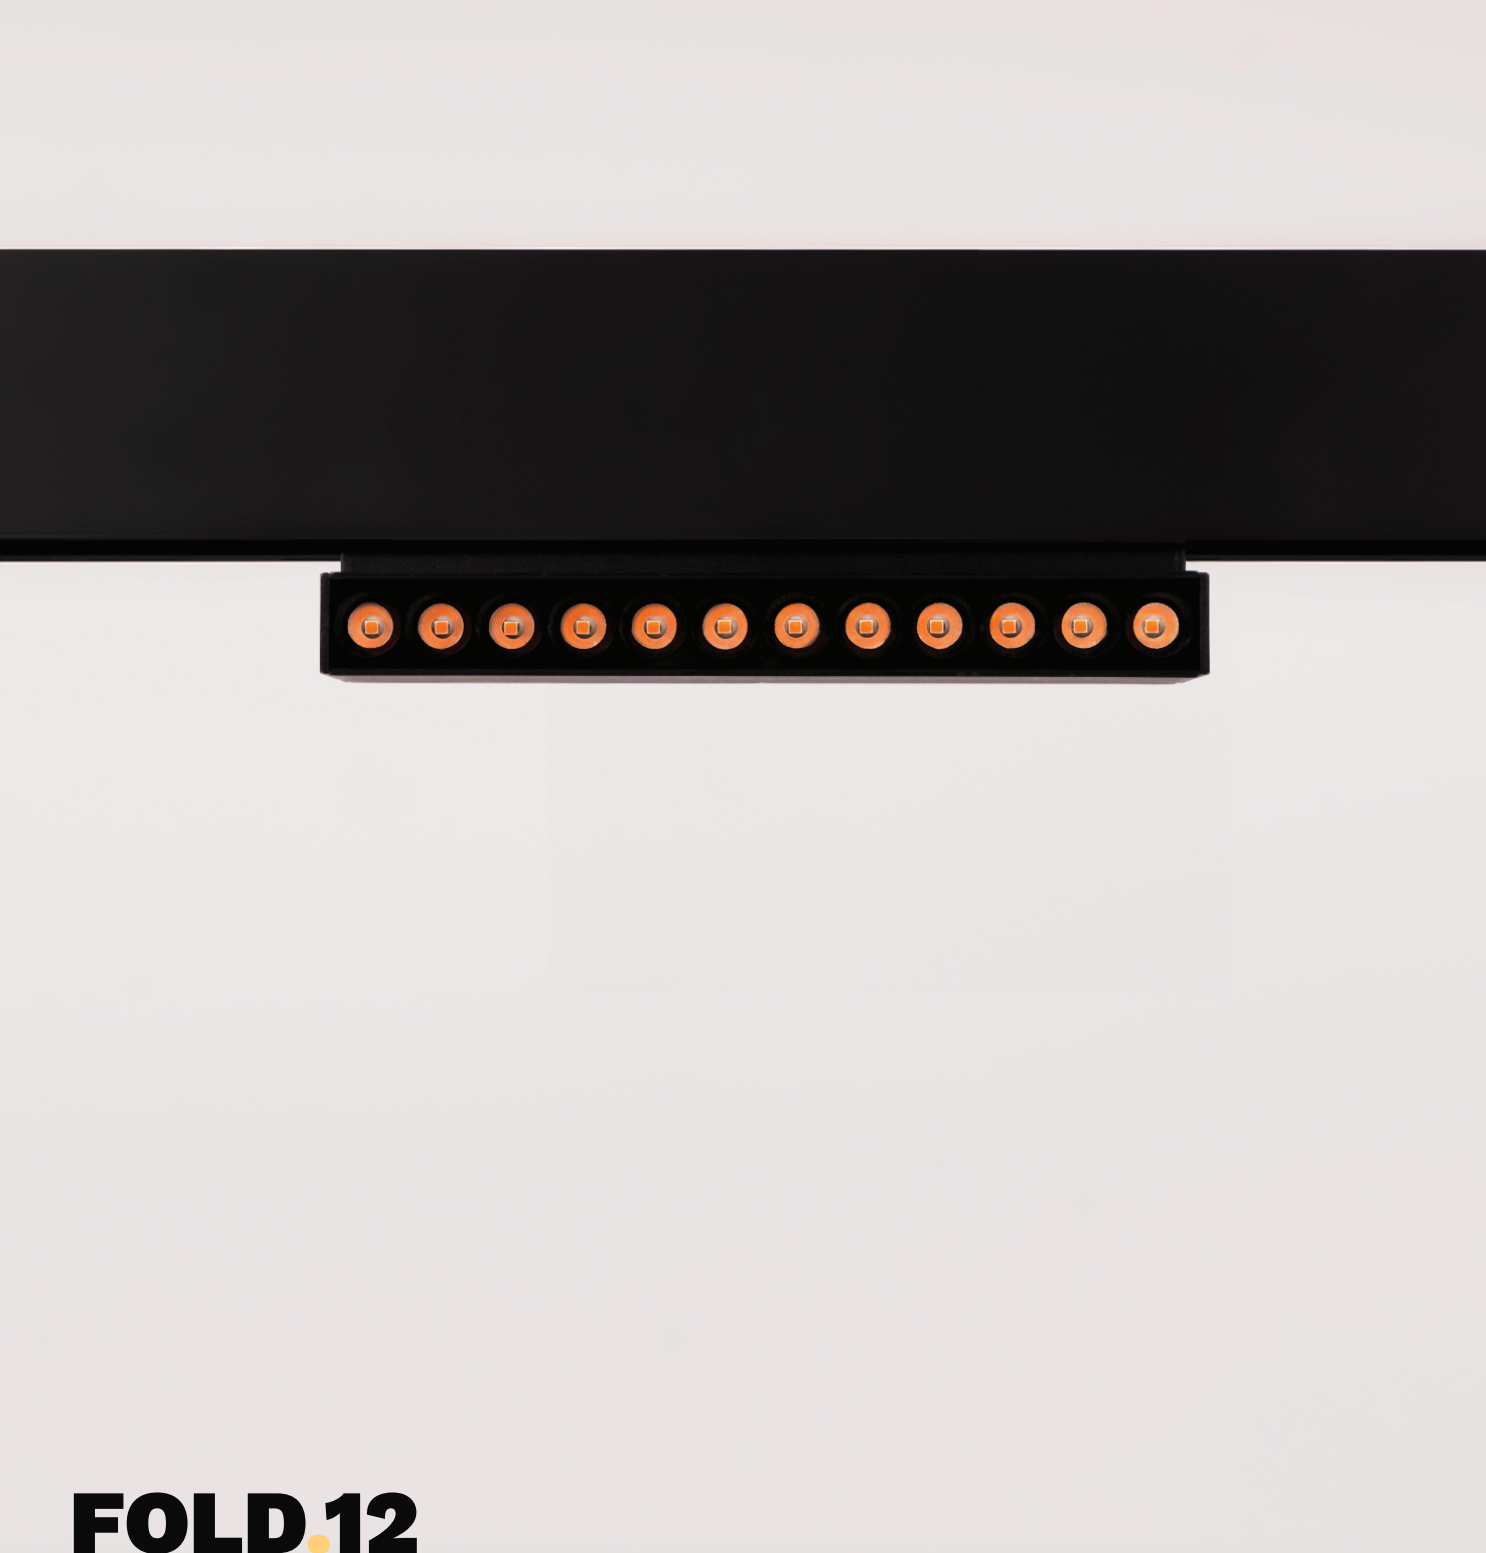

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>20° / 34° / 48°</i>
<b>Lumen Output</b>	<i>685Lm</i>	<b>Luminous Efficacy</b>	<i>76lm / W</i>
<b>Power</b>	<i>15W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>196mm x 120mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

**FOLD.12**



<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>110°</i>
<b>Lumen Output</b>	<i>605Lm</i>	<b>Luminous Efficacy</b>	<i>75lm / W</i>
<b>Power</b>	<i>8W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>196mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>





<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>110°</i>
<b>Lumen Output</b>	<i>1015Lm</i>	<b>Luminous Efficacy</b>	<i>78lm / W</i>
<b>Power</b>	<i>13W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>388mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

**LINE.40**




<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>110°</i>
<b>Lumen Output</b>	<i>1970Lm</i>	<b>Luminous Efficacy</b>	<i>78lm / W</i>
<b>Power</b>	<i>25W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>800mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

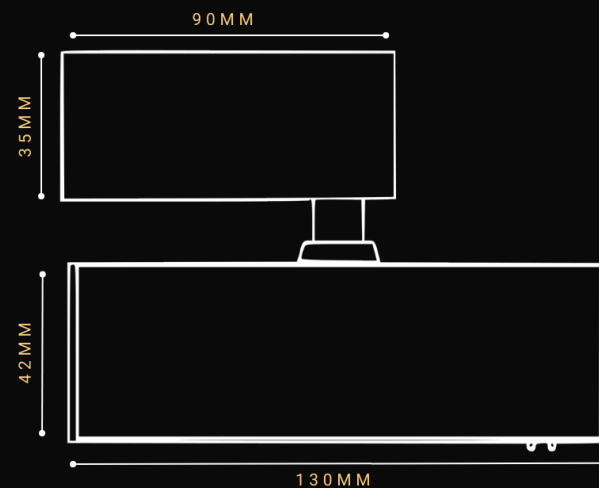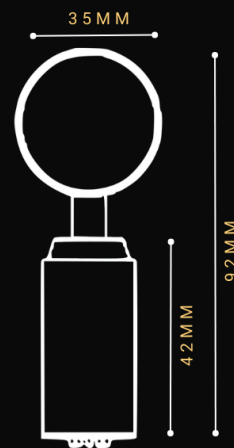

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>20° / 30° / 40°</i>
<b>Lumen Output</b>	<i>526Lm</i>	<b>Luminous Efficacy</b>	<i>105lm / W</i>
<b>Power</b>	<i>5W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>35mm x 90mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

**SPOT.35**

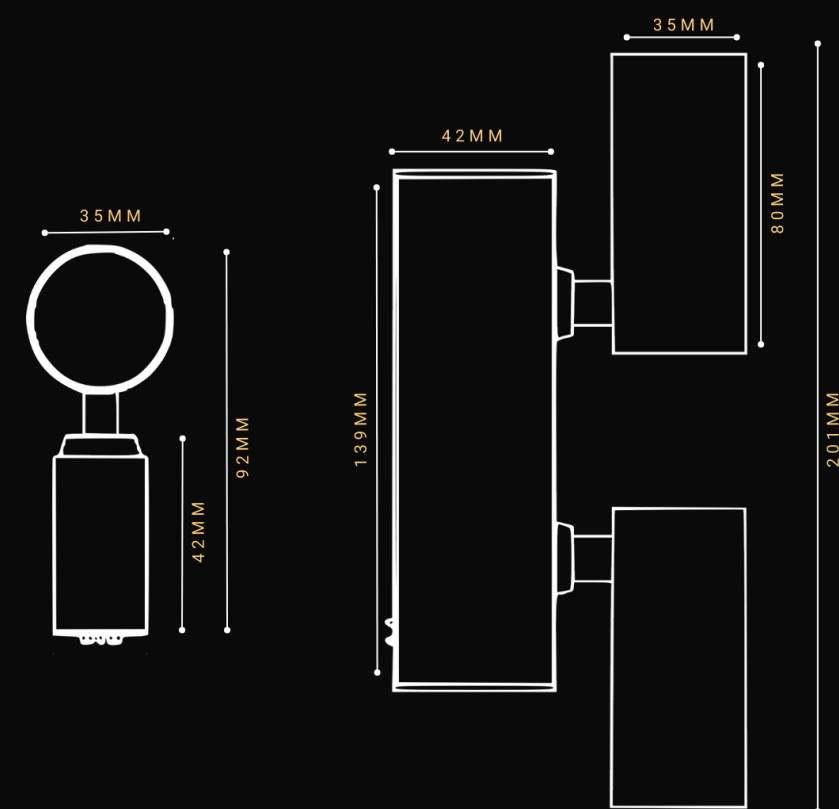

**Material** *Aluminium*

**Lumen Output** *1052Lm*

**Power** *10W 24V*

**Dimmable** *N/A*

**CRI** *>95*

**Power Factor** *>0.98*

**Size** *35mm x 80mm*

**Cut Out** *N/A*

**Beam Angle** *20° / 30° / 40°*

**Luminous Efficacy** *105lm / W*

**IP Rating** *21*

**Fire Rating** *N/A*


**Driver Required** *Yes*

**Binning** *2 - 3 SDCM*

**DALI Control** *Yes*


**Colour Temperature** *2700K / 3000K / 4000K*

**SPOT.35.T**

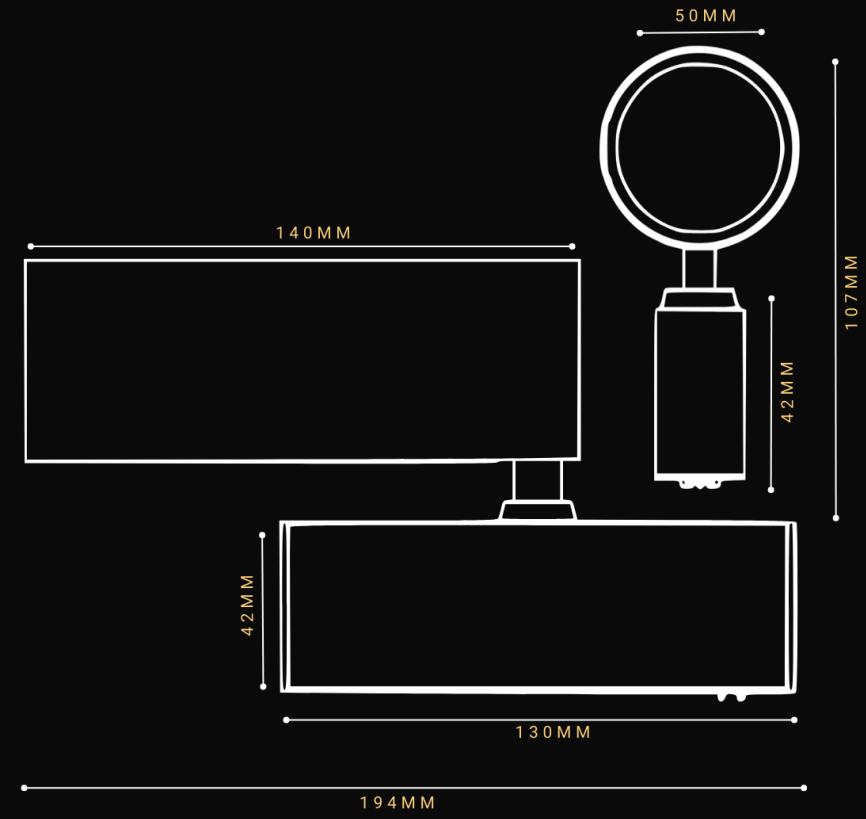

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>18° / 24° / 36°</i>
<b>Lumen Output</b>	<i>682Lm</i>	<b>Luminous Efficacy</b>	<i>85lm / W</i>
<b>Power</b>	<i>8W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>50mm x 140mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

**SPOT.50**




<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>110°</i>
<b>Lumen Output</b>	<i>750Lm</i>	<b>Luminous Efficacy</b>	<i>75lm / W</i>
<b>Power</b>	<i>10W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>193mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>



<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>110°</i>
<b>Lumen Output</b>	<i>1140Lm</i>	<b>Luminous Efficacy</b>	<i>76lm / W</i>
<b>Power</b>	<i>15W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>290mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

**WAVE.30**

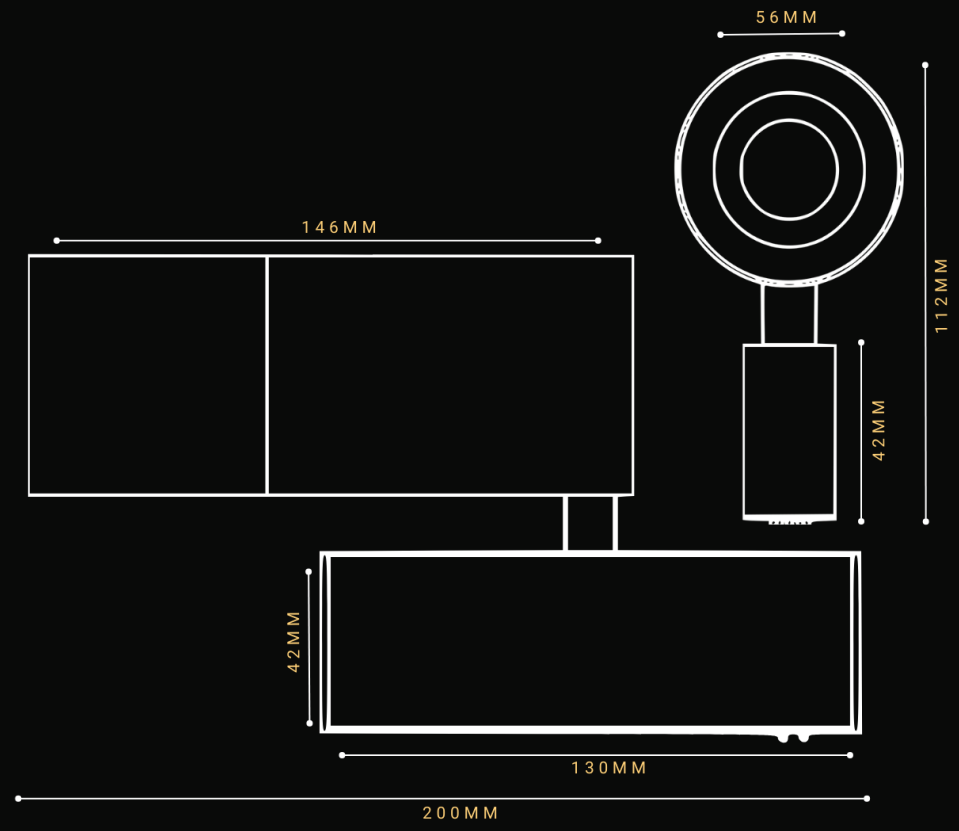

<b>Material</b>	<i>Aluminium</i>	<b>Beam Angle</b>	<i>20° - 60°</i>
<b>Lumen Output</b>	<i>800Lm</i>	<b>Luminous Efficacy</b>	<i>80lm / W</i>
<b>Power</b>	<i>10W 24V</i>	<b>IP Rating</b>	<i>21</i>
<b>Dimmable</b>	<i>N/A</i>	<b>Fire Rating</b>	<i>N/A</i>
<b>CRI</b>	<i>&gt;95</i>	<b>Driver Required</b>	<i>Yes</i>
<b>Power Factor</b>	<i>&gt;0.98</i>	<b>Binning</b>	<i>2 - 3 SDCM</i>
<b>Size</b>	<i>56mm x 146mm</i>	<b>DALI Control</b>	<i>Yes</i>
<b>Cut Out</b>	<i>N/A</i>	<b>Colour Temperature</b>	<i>2700K / 3000K / 4000K</i>

**ZOOM.55**