
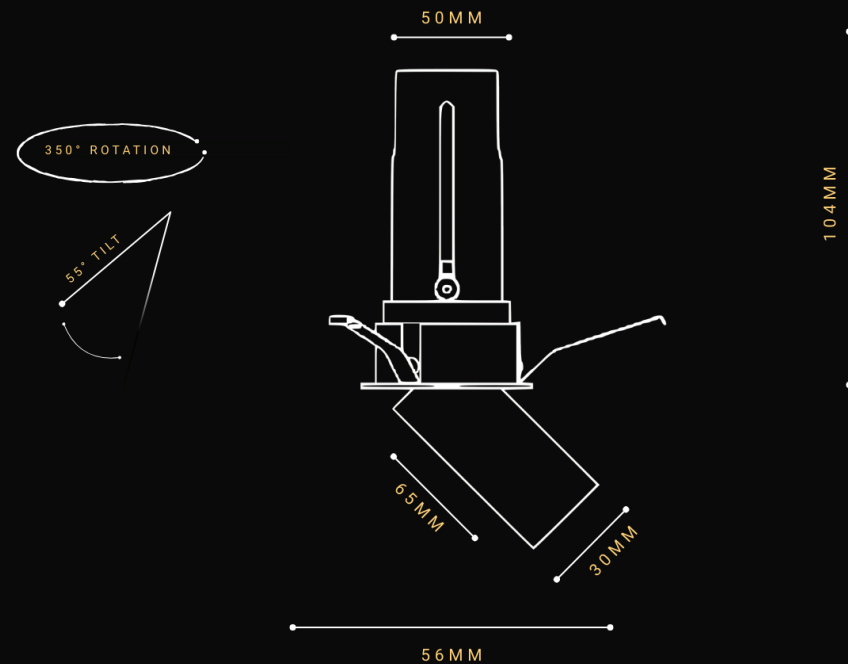



Material	<i>Aluminium</i>	Beam Angle	<i>15° / 24° / 36°</i>
Lumen Output	<i>600Lm</i>	Luminous Efficacy	<i>75lm / W</i>
Power	<i>8W 36V 180mA</i>	IP Rating	<i>21</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>60min</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>30mm x 65mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>50mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>

FOLLOW.ME.R

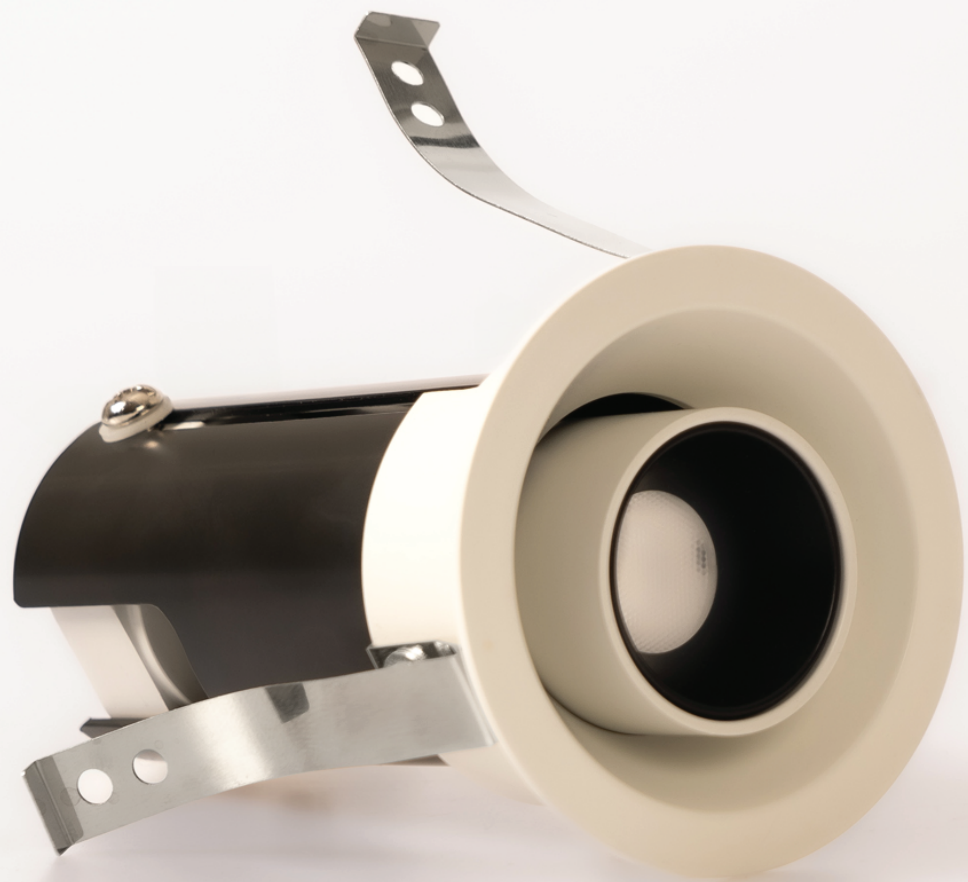


Material	<i>Aluminium</i>	Beam Angle	<i>15° / 24° / 36°</i>
Lumen Output	<i>600Lm</i>	Luminous Efficacy	<i>75lm / W</i>
Power	<i>8W 36V 180mA</i>	IP Rating	<i>21</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>60min</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>30mm x 65mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>50mm</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>

FOLLOW ME.R

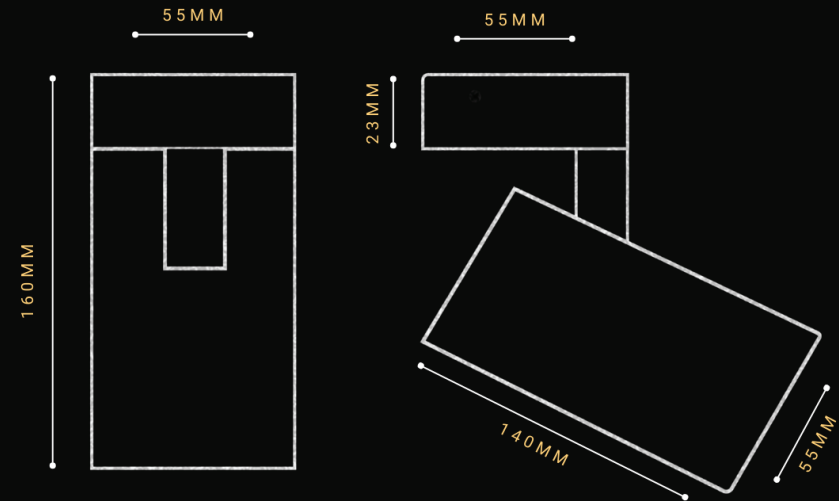


Material	<i>Aluminium</i>	Beam Angle	<i>15° / 24° / 36° / 60°</i>
Lumen Output	<i>670Lm</i>	Luminous Efficacy	<i>83lm / W</i>
Power	<i>8W</i>	IP Rating	<i>21</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Built-In Dimmable Driver</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>55mm x 163mm</i>	DALI Control	<i>Yes (Third-Party Controller Required)</i>
Cut Out	<i>N/A</i>	Colour Temperature	<i>2700K / 3000K / 4000K</i>


FOLLOW.ME.S

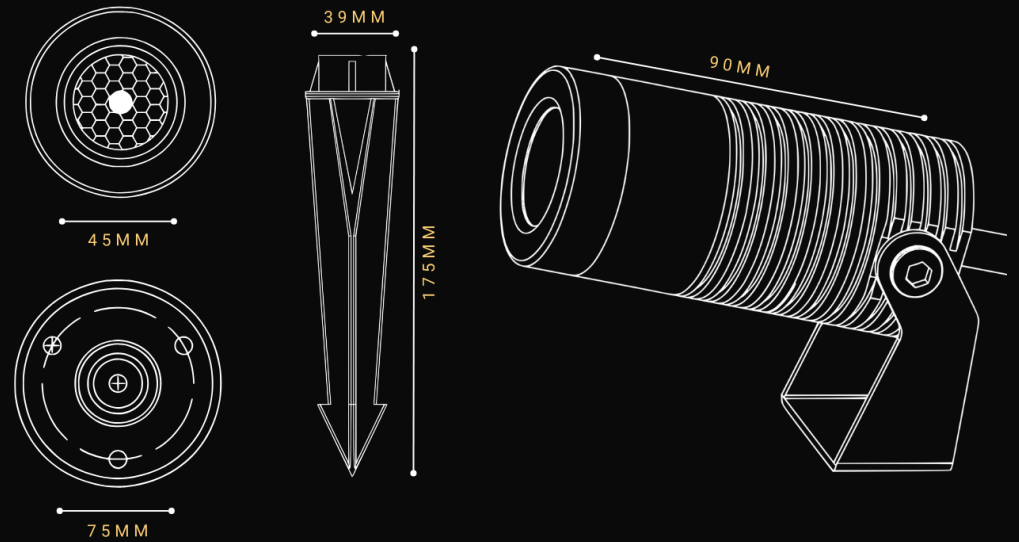





Material	<i>Aluminium</i>	Beam Angle	<i>15° / 36° / 60°</i>
Lumen Output	<i>600Lm</i>	Luminous Efficacy	<i>88lm / W</i>
Power	<i>6.8W 9.7V 700mA</i>	IP Rating	<i>67</i>
Dimmable	<i>N/A</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>44mm x 90mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>N/A</i>	Colour Temperature	<i>2700K / 3000K</i>

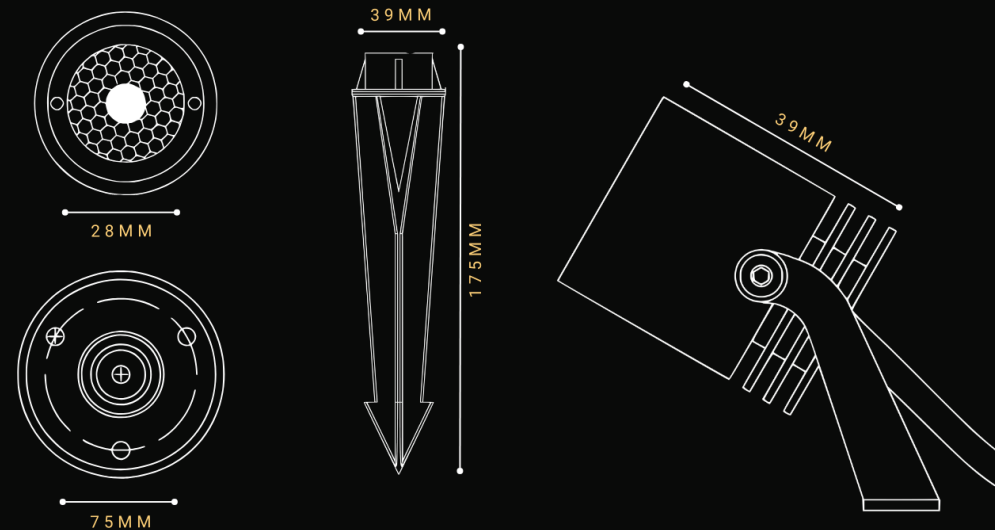




Material	<i>Aluminium</i>	Beam Angle	<i>15° / 30° / 60°</i>
Lumen Output	<i>180Lm</i>	Luminous Efficacy	<i>80lm / W</i>
Power	<i>2.1W 3V 700mA</i>	IP Rating	<i>67</i>
Dimmable	<i>N/A</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>28mm x 39mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>N/A</i>	Colour Temperature	<i>2700K / 3000K</i>

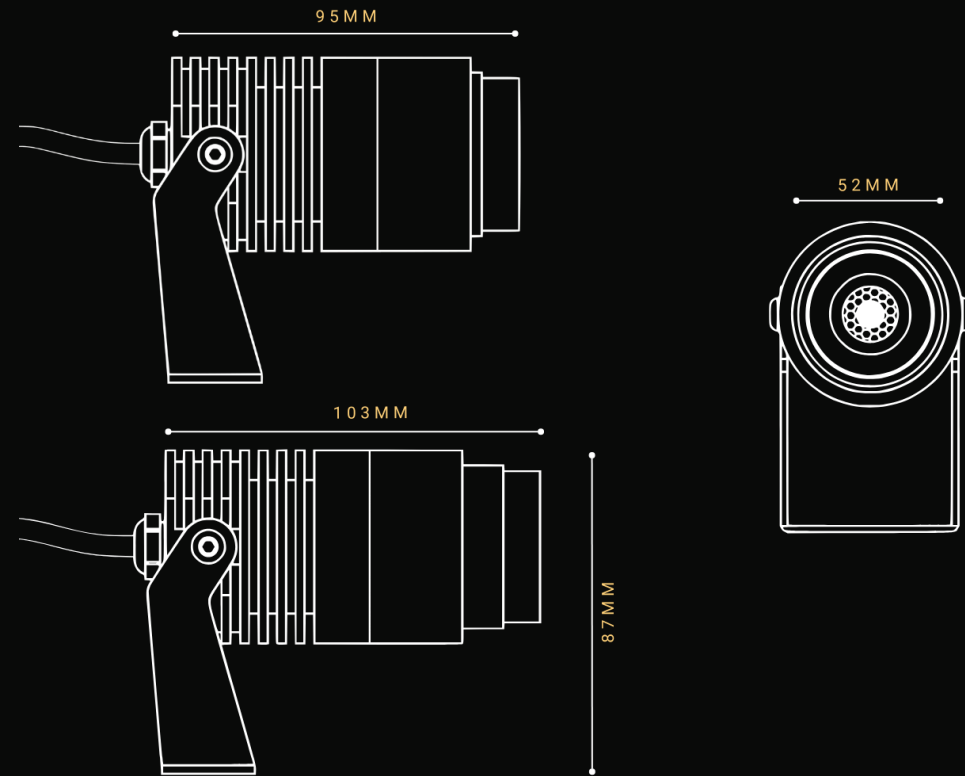

Material	<i>Aluminium</i>	Beam Angle	<i>10° - 40°</i>
Lumen Output	<i>500Lm</i>	Luminous Efficacy	<i>79lm / W</i>
Power	<i>6.3W 9V 700mA</i>	IP Rating	<i>67</i>
Dimmable	<i>N/A</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>52mm x 103mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>N/A</i>	Colour Temperature	<i>2700K</i>

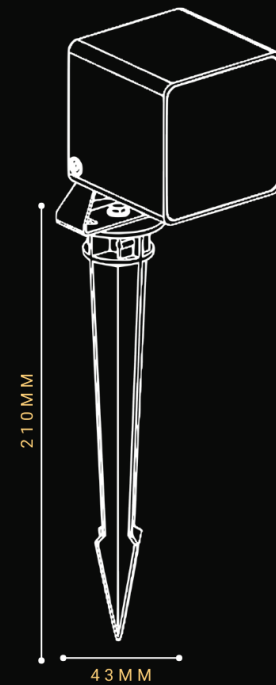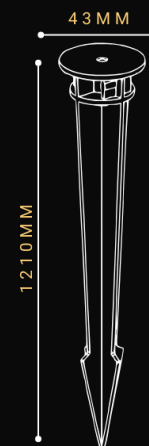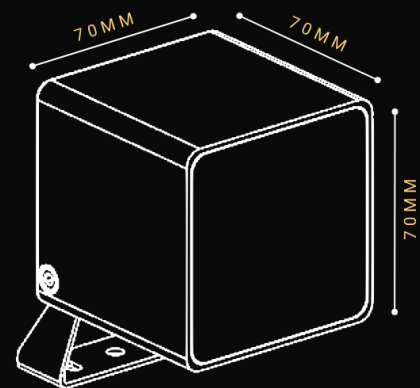

Material	<i>Aluminium</i>	Beam Angle	<i>15° / 36° / 60°</i>
Lumen Output	<i>870Lm</i>	Luminous Efficacy	<i>97lm / W</i>
Power	<i>8.9W 17.9V 500mA</i>	IP Rating	<i>65</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>70mm x 70mm x 70mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>N/A</i>	Colour Temperature	<i>2700K</i>

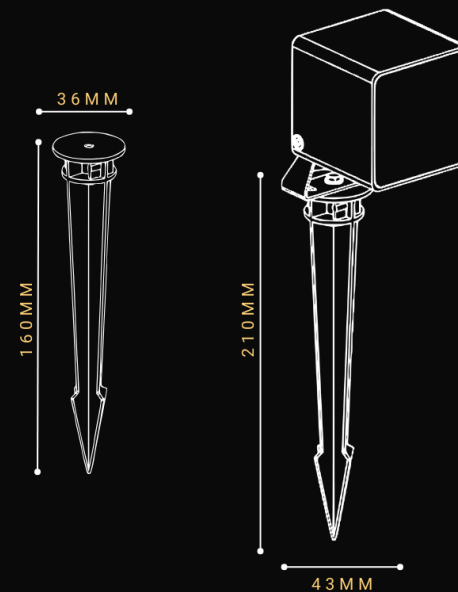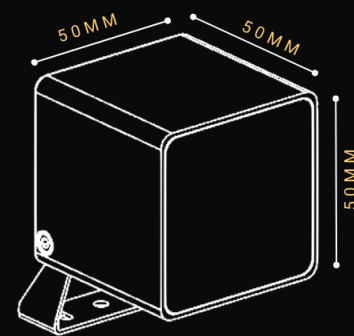

Material	<i>Aluminium</i>	Beam Angle	<i>15° / 36° / 60°</i>
Lumen Output	<i>445Lm</i>	Luminous Efficacy	<i>75lm / W</i>
Power	<i>5.9W 17V 350mA</i>	IP Rating	<i>65</i>
Dimmable	<i>Yes</i>	Fire Rating	<i>N/A</i>
CRI	<i>>95</i>	Driver Required	<i>Yes</i>
Power Factor	<i>>0.98</i>	Binning	<i>2 - 3 SDCM</i>
Size	<i>50mm x 50mm x 50mm</i>	DALI Control	<i>Yes</i>
Cut Out	<i>N/A</i>	Colour Temperature	<i>2700K</i>