

Lighting of London

Product Datasheet

Uno



+(44)0207 139 5129



enquiries@lightingoflondon.co


The Uno is a discreet recessed wall mounted reading light, providing 30° of even lighting to beautifully highlight any bedhead position and mark its surroundings.

Suitable for interior and exterior applications.

Installation sleeve included.



Material	Anodised aluminium
Lumen Output	120Lm
LED	CREE 1 pc XPE LED
Lifespan	> 50,000 hrs
CRI	> 90
Input Voltage	AC
Power	230v
Power Factor	-
Size	(see diagram)
Beam Angle	30°
Cut Out	Ø 155 length * 55 width * 40 height (mm)
Fire & Acoustic Rated	-
IP Rating	20
Working Temperature	-
Binning	-
Colour Temperature	2700K
Finish	White, Polished Chrome, Satin Nickel

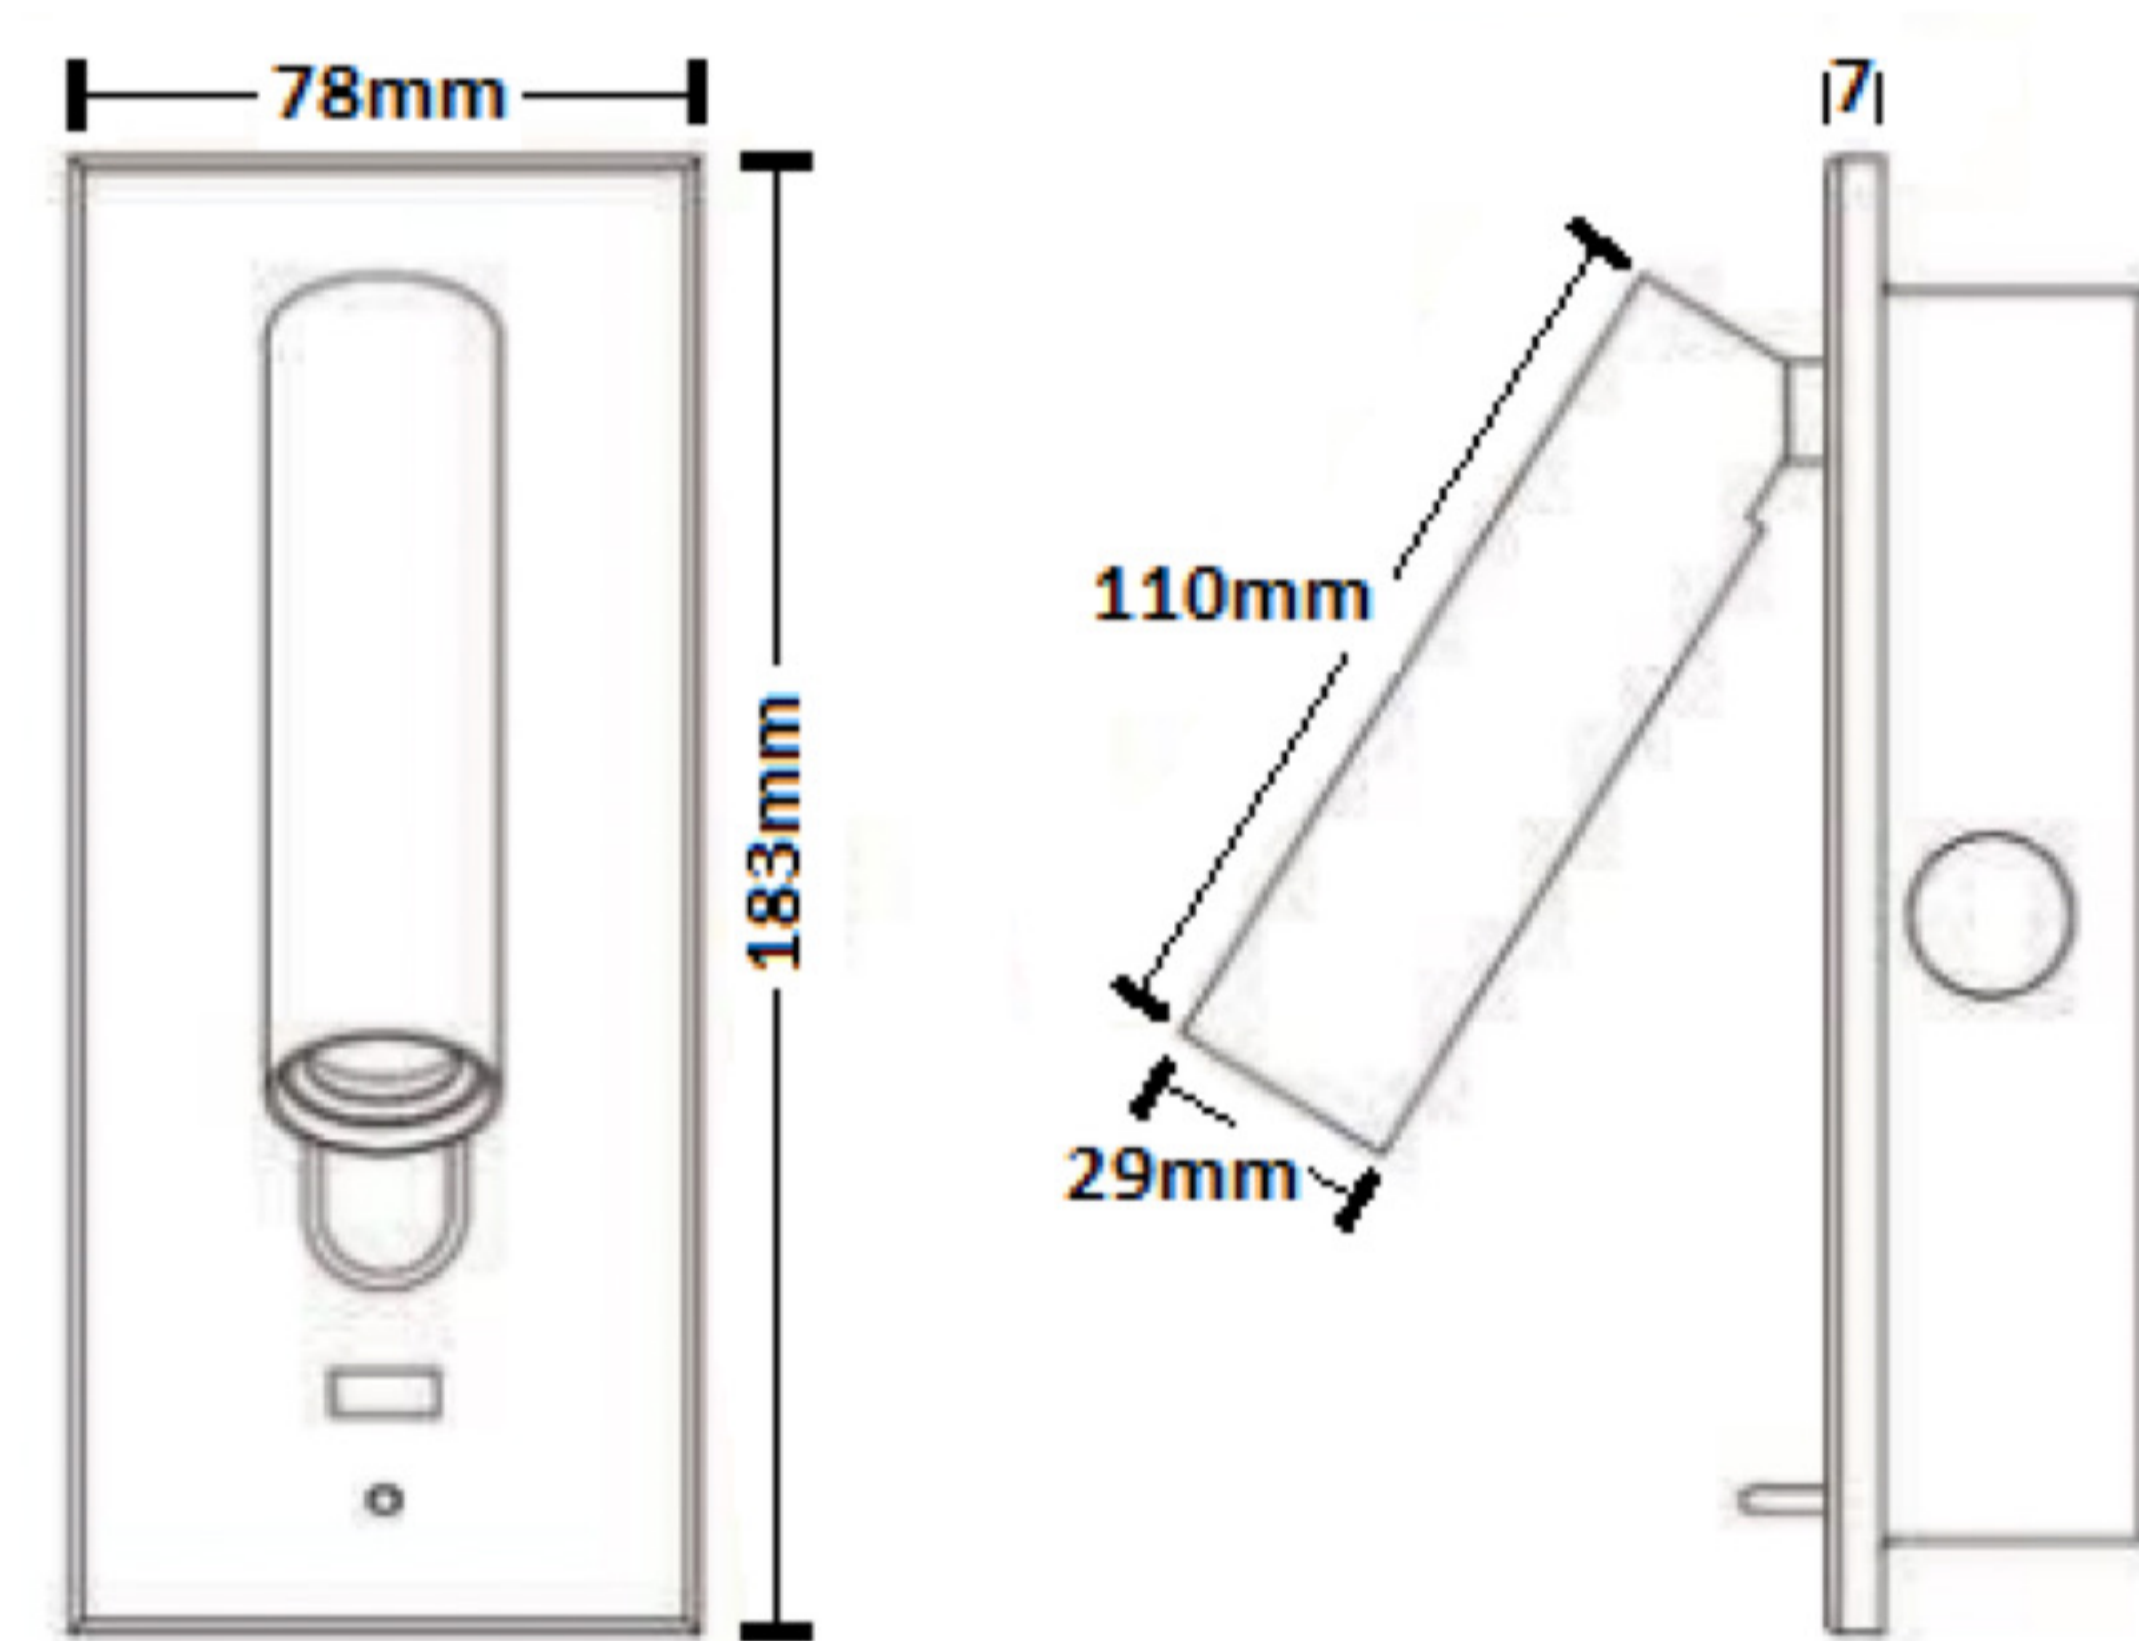

Height	Max E	Average E	Diameter
3.28ft	71.950 fc	46.300 fc	1.20ft
1.0m	774.40 lx	498.40 lx	0.36m
6.56ft	17.990 fc	11.570 fc	2.39ft
2.0m	193.60 lx	124.60 lx	0.73m
9.84ft	7.994 fc	5.144 fc	3.59ft
3.0m	86.05 lx	55.37 lx	1.09m
13.12ft	4.497 fc	2.894 fc	4.78ft
4.0m	48.40 lx	31.15 lx	1.46m
16.40ft	2.878 fc	1.852 fc	5.98ft
5.0m	30.98 lx	19.93 lx	1.82m

Beam angle 20.7°

LIGHTING OF LONDON. Worlds End Studios, London. SW10 0RJ

<https://www.lightingoflondon.co>, +(44) 020 7139 5129

© All Rights Reserved



LIGHTING OF LONDON