

product Data

LIGHTING OF LONDON

Moon

The Moon is a discreet spiked or surface mounted fitting, suitable for walkways, driveways, beds and borders. The Moon provides a full 360° of even lighting, allowing beautifully highlighted surroundings, and with our unique colour finish it's virtually invisible in any environment.

Supplied with a surface mount and ground spike, suitable for exterior applications.

Ensure smooth dimming ability with our range of PowerBank drivers.





Material	Anodised aluminium
Lumen Output	700Lm
LED	Osram 48 pc 2835 SMD LED
Lifespan	>50,000 hrs
CRI	> 90
Input Voltage	DC
Power	6.3W 18V 350mA
Power Factor	-
Size	Ø 150 * (380 or 570 or 960)mm
Beam Angle	100°
Cut Out	Ø 56.5mm
Fire & Acoustic Rated	-
IP Rating	67
Working Temperature	-
Binning	-
Colour Temperature	3000K
Finish	Stainless Steel

Illuminance at a Distance

Height	Centre E	Average E	Diameter
3.28ft	25.856 fc	9.185 fc	8.35ft
1.00m	278.31 lx	98.87 lx	2.55m
6.56ft	6.464 fc	2.296 fc	16.70ft
2.00m	69.58 lx	24.72 lx	5.09m
9.84ft	2.873 fc	1.021 fc	25.05ft
3.00m	30.92 lx	10.99 lx	7.63m
13.12ft	1.616 fc	0.574 fc	33.40ft
4.00m	17.38 lx	6.18 lx	10.18m
16.40ft	1.034 fc	0.367 fc	41.74ft
5.00m	11.13 lx	3.96 lx	12.72m

Beam angle 103.7°

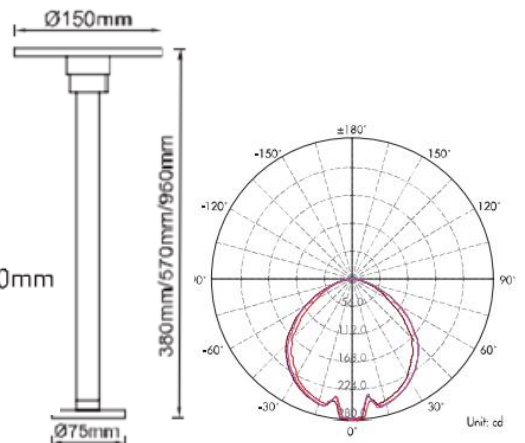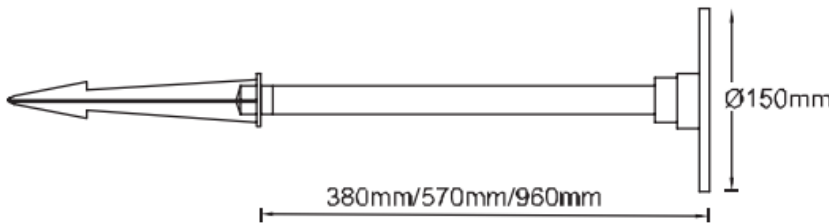

LIGHTING OF LONDON. Worlds End Studios, London. SW10 0RJ

<https://www.lightingoflondon.co/> +(44) 020 7349 7222

© All Rights Reserved